INRICHTING ERKEND BIJ TOEPASSING VAN DE BESLUITWET VAN 30 JANUARI 1947 / ETABLISSEMENT RECONNU PAR APPLICATION DE L'ARRÊTE-LOI DU 30 JANVIER 1947

BM Fabrics
Hoogstraat 177
9550 HERZELE

Your notice of	**Your reference**	**Date**
22-04-2026		28-04-2026

Analysis Report 26.02139.01

Required tests :
EN 13773 (2003)

Sample id	Information given by the client	Date of receipt
T2608236	815003 MONO	22-04-2026



Gina Créelle
Order responsible


This report may be reproduced, as long as it is presented in its entire form, without written permission of Centexbel.
The results of the analysis cover the received samples. Centexbel is not responsible for the representativeness of the samples.
In assessing compliance with the specifications, we did not take into account the uncertainty on the test results.

ISO 17025
BELAC 056-TEST
ilac-MRA
CENTEXBEL • textile competence centre • www.centexbel.be • www.vkc.be
GENT • Technologiepark 70 • BE-9052 Zwijnaarde, Belgium • phone +32 9 220 41 51 • fax +32 9 220 49 55 • gent@centexbel.be
GRÂCE-HOLLOGNE • Rue du Travail 5 • BE-4460 Grâce-Hollogne, Belgium • phone +32 4 296 82 00 • g-h@centexbel.be
KORTRIJK • Etienne Sabbelaan 49 • BE-8500 Kortrijk, Belgium • phone +32 56 29 27 00 • fax +32 56 29 27 01 • info@vkc.be
VAT BE 0459.218.289 • IBAN BE44 2100 4729 6545 • BIC GEBABEBB
Digitally signed by Centexbel

INRICHTING ERKEND BIJ TOEPASSING VAN DE BESLUITWET VAN 30 JANUARI 1947 / ETABLISSEMENT RECONNU PAR APPLICATION DE L'ARRÊTE-LOI DU 30 JANVIER 1947

Samples

T2608236
815003 MONO

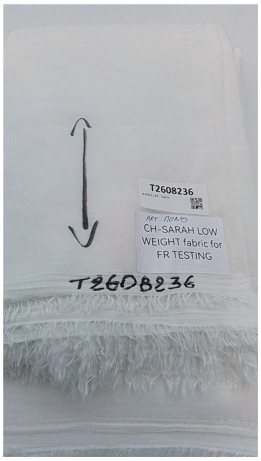

INRICHTING ERKEND BIJ TOEPASSING VAN DE BESLUITWET VAN 30 JANUARI 1947 / ETABLISSEMENT RECONNU PAR APPLICATION DE L'ARRÊTE-LOI DU 30 JANVIER 1947

Reference: T2608236 - 815003 MONO

Washing and drying

Date of ending the test	24-04-2026
Standard used	ISO 6330 (2000) + A1 (2008), ISO 6330 (2012)
Deviation from the standard	-
Conditioning	20°C, relative humidity 65%
Apparatus	Wascator FOM 71 (type A)
Used detergent	ECE detergent (Type 3)
Washing method and temperature	8A- 30°C (2000)
Drying method	A = Line dry (2000)
Number of washing cycles	1
Mass of the test specimens	139 g
Mass of the ballast	The washing machine is filled with ballast to achieve 2 kg in total
Remark	Washing always occurs with a ballast type III 100% PES regardless of the composition of the fabric.

Sample generated: T2608236_01d

INRICHTING ERKEND BIJ TOEPASSING VAN DE BESLUITWET VAN 30 JANUARI 1947 / ETABLISSEMENT RECONNU PAR APPLICATION DE L'ARRÊTE-LOI DU 30 JANVIER 1947

Reference: **T2608236_01d - 815003 MONO**

Textiles – Burning behaviour – Curtains and drapes - Textile fabrics - Determination of the ignitability of vertically oriented specimens.

Date of ending the test	27-04-2026
Standard used	EN 1101 (1995) + A1 (2005)
Product standard	EN 13773 (2003)
Deviation from the standard	-
Conditioning	20°C, relative humidity 65%
Testing atmosphere	23°C, relative humidity 29%
Dimension of the specimens	200 mm x 80 mm
Ignition	Bottom edge

The test specimens have been cleaned.

Length

Flame application time (s)	Cases of ignition	Cases of non-ignition
1	0	1
2	0	1
3	0	1
4	0	1
5	0	1
10	0	1
15	0	1
20	0	5

The mean of the recorded times at which ignition was observed is calculated
No ignition within 20 s

INRICHTING ERKEND BIJ TOEPASSING VAN DE BESLUITWET VAN 30 JANUARI 1947 / ETABLISSEMENT RECONNU PAR APPLICATION DE L'ARRÊTE-LOI DU 30 JANVIER 1947

Width

Flame application time (s)	Cases of ignition	Cases of non-ignition
1	0	1
2	0	1
3	0	1
4	0	1
5	0	1
10	0	1
15	0	1
20	0	5

The mean of the recorded times at which ignition was observed is calculated
No ignition within 20 s

Minimum ignition time No ignition within 20 s

INRICHTING ERKEND BIJ TOEPASSING VAN DE BESLUITWET VAN 30 JANUARI 1947 / ETABLISSEMENT RECONNU PAR APPLICATION DE L'ARRÊTE-LOI DU 30 JANVIER 1947

Reference: **T2608236 - 815003 MONO**

Textiles and textile products – Burning behaviour – Curtains and drapes. Measurement of flame spread of vertically oriented specimens with large ignition source.

Date of ending the test	28-04-2026
Standard used	EN 13772 (2011)
Product standard	EN 13773 (2003)
Deviation from the standard	-
Conditioning	20°C, relative humidity 65%

The test specimens have not been cleaned nor submitted to an accelerated ageing procedure.

Length

	Front	Back	Back	Back
Severance 1st thread	no	no	no	no
Severance 2nd thread	no	no	no	no
Severance 3rd thread	no	no	no	no
Time to sever 3rd thread (s)	/	/	/	/
Destroyed length (mm)	120	135	120	125
Flaming debris	no	no	no	no

Width

	Front	Back	Back	Back
Severance 1st thread	no	no	no	no
Severance 2nd thread	no	no	no	no
Severance 3rd thread	no	no	no	no
Time to sever 3rd thread (s)	/	/	/	/
Destroyed length (mm)	130	135	135	125
Flaming debris	no	no	no	no

INRICHTING ERKEND BIJ TOEPASSING VAN DE BESLUITWET VAN 30 JANUARI 1947 / ETABLISSEMENT RECONNU PAR APPLICATION DE L'ARRÊTE-LOI DU 30 JANVIER 1947

Reference: T2608236 - 815003 MONO

Washing and drying

Date of ending the test	24-04-2026
Standard used	ISO 6330 (2000) + A1 (2008), ISO 6330 (2012)
Deviation from the standard	-
Conditioning	20°C, relative humidity 65%
Apparatus	Wascator FOM 71 (type A)
Used detergent	ECE detergent (Type 3)
Washing method and temperature	8A- 30°C (2000)
Drying method	A = Line dry (2000)
Number of washing cycles	12
Mass of the test specimens	183 g
Mass of the ballast	The washing machine is filled with ballast to achieve 2 kg in total
Remark	Washing always occurs with a ballast type III 100% PES regardless of the composition of the fabric.

Sample generated: T2608236_02d

INRICHTING ERKEND BIJ TOEPASSING VAN DE BESLUITWET VAN 30 JANUARI 1947 / ETABLISSEMENT RECONNU PAR APPLICATION DE L'ARRÊTE-LOI DU 30 JANVIER 1947

Reference: **T2608236_02d - 815003 MONO**

Textiles and textile products – Burning behaviour – Curtains and drapes. Measurement of flame spread of vertically oriented specimens with large ignition source.

Date of ending the test	28-04-2026
Standard used	EN 13772 (2011)
Product standard	EN 13773 (2003)
Deviation from the standard	-
Conditioning	20°C, relative humidity 65%

The test specimens have been cleaned.

Length

	Front	Back	Front	Front
Severance1st thread	no	no	no	no
Severance 2nd thread	no	no	no	no
Severance 3rd thread	no	no	no	no
Time to sever 3rd thread (s)	/	/	/	/
Destroyed length (mm)	150	125	130	125
Flaming debris	no	no	no	no

Width

	Front	Back	Front	Front
Severance1st thread	no	no	no	no
Severance 2nd thread	no	no	no	no
Severance 3rd thread	no	no	no	no
Time to sever 3rd thread (s)	/	/	/	/
Destroyed length (mm)	125	115	140	125
Flaming debris	no	no	no	no

INRICHTING ERKEND BIJ TOEPASSING VAN DE BESLUITWET VAN 30 JANUARI 1947 / ETABLISSEMENT RECONNU PAR APPLICATION DE L'ARRÊTE-LOI DU 30 JANVIER 1947

Reference: **T2608236 - 815003 MONO**

Classification of curtains and drapes according to EN 13773

Product standard	EN 13773 (2003)
Classification in accordance with EN 13773	Class 1