

Document number:	202300949	Report date:	28/04/2023
Fabric reference:	829031 LEXICON		
Customer:	Bmfabrics	Date analyses:	28/04/2023
	Hoogstraat 177	Place analyses:	Labotex
	B 9550 Herzele	Date of request:	15/03/2023
		Samples received:	17/03/2023

Testing and conditioning in standard atmosphere, T (20+-2)°C and RH (65+-4)%

## Specification

## Results

## Remarks !

### Burning behaviour of fabrics for curtains drapes

### EN 1101


Test EN1101 is performed after subjecting the fabric to 1 washing cycle, based on the recommended washing instructions.

EN13773

conditioning min 24h in standard atmosphere

used gas: propane  
 flame height: 40mm  
 bottom edge ignition:  
 size EN1101: 200x80mm  
 size EN13772: 560x170mm

#### flowchart EN13773

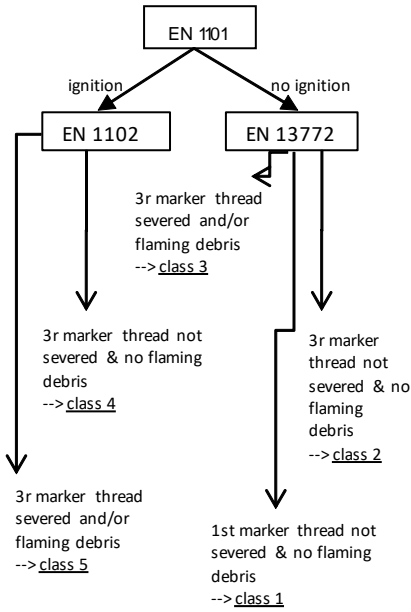

flame application time	warp	weft
1s	no ignition	no ignition
2s	no ignition	no ignition
3s	no ignition	no ignition
4s	no ignition	no ignition
5s	no ignition	no ignition
10s	no ignition	no ignition
15s	no ignition	no ignition
20s	no ignition	no ignition

Mean ignition time warp: 0.0  
 Mean ignition time weft: 0.0  
 Minimum ignition time: 0.0

Document number: 202300949  
 Fabric reference: 829031 LEXICON  
 Customer: Bmfabrics  
 Hoogstraat 177  
 B 9550 Herzele

Report date: 28/04/2023  
 Date analyses: 28/04/2023  
 Place analyses: Labotex  
 Date of request: 15/03/2023  
 Samples received: 17/03/2023

Testing and conditioning in standard atmosphere, T (20+-2)°C and RH (65+-4)%

Specification	Results				Remarks !
<b>EN13772 before washing</b>					
warp	face	reverse	reverse	reverse	
1st marker thread severed	no	no	no	no	conditioning not according to standard
2nd marker thread severed	no	no	no	no	
3rd marker thread severed	0	0	0	0	
time to severance 3rd marker thread (s)	0	0	0	0	
destroyed length (mm)	128	110	115	115	
flaming debris	no	no	no	no	
weft	face	reverse	face	face	
1st marker thread severed	no	no	no	no	
2nd marker thread severed	no	no	no	no	
3rd marker thread severed	0	0	0	0	
time to severance 3rd marker thread (s)	0	0	0	0	
destroyed length (mm)	127	117	141	137	
flaming debris	no	no	no	no	
<b>EN13772 after washing</b>					
warp	face	reverse	reverse	reverse	
1st marker thread severed	no	no	no	no	conditioning not according to standard
2nd marker thread severed	no	no	no	no	
3rd marker thread severed	no	no	no	no	
time to severance 3rd marker thread (s)	0	0	0	0	
destroyed length (mm)	135	125	125	112	
flaming debris	no	no	no	no	
weft	face	reverse	face	face	
1st marker thread severed	no	no	no	no	
2nd marker thread severed	no	no	no	no	
3rd marker thread severed	no	no	no	no	
time to severance 3rd marker thread (s)	0	0	0	0	
destroyed length (mm)	133	131	125	108	
flaming debris	no	no	no	no	

Document number:	202300949	Report date:	28/04/2023
Fabric reference:	829031 LEXICON		
Customer:	Bmfabrics	Date analyses:	28/04/2023
	Hoogstraat 177	Place analyses:	Labotex
	B 9550 Herzele	Date of request:	15/03/2023
		Samples received:	17/03/2023

Testing and conditioning in standard atmosphere, T (20+-2)°C and RH (65+-4)%

Specification	Results	Remarks	!
<b>Classification</b>			<input type="checkbox"/>
Class 1	----- X -----		
Class 2	-----		
Class 3	-----		
Class 4 or 5	-----		



Labotex certifies that the results mentioned in this report are obtained after testing in accordance with the procedure and equipment specified by the concerned standards, unless noted differently.



Annick Gijsemans - Laboratory Manager

Labotex has the competence to perform tests in accordance with the requirements of standard NBN EN ISO/IEC 17025. The scope of this accreditation can be consulted on the BELAC website [https://ng3.economie.fgov.be/Nl/belac/labotesting/applic/accreditedc\\_nl.asp?certificatienummer=364-TEST](https://ng3.economie.fgov.be/Nl/belac/labotesting/applic/accreditedc_nl.asp?certificatienummer=364-TEST)

Sampling is performed by the customer. Fabric analysed as received. The results in this report only relate to the tested items.

Samples will be returned to the customer together with the certificate, if possible. Samples will not be retained, unless specified by the customer. Retained samples will be kept for maximum one year unless a specific retention period is necessary.

This report cannot be copied unless in its complete form and with written approval of Labotex (Kontich).

Uncertainty of measurement on the test result is not taken into account when assessing compliance with the specifications. When results are compliant to the specification, the square next to the result is empty. When the result is not compliant to the specification, the square is filled with a flag "X".

The uncertainty and the description of the methods are available at the lab on request.