

Roller Blinds



LEGENDA

Design side support	
Accu	
Accu RTS	
BOX	
Alternating Current (AC)	
Chain	
Ceiling mounting not possible	
Mounting profile	
Side guide possible	
Side guide not possible	
No design side support possible	
Motor 230 V available in:	
Motor 230 V available in:	

REN32

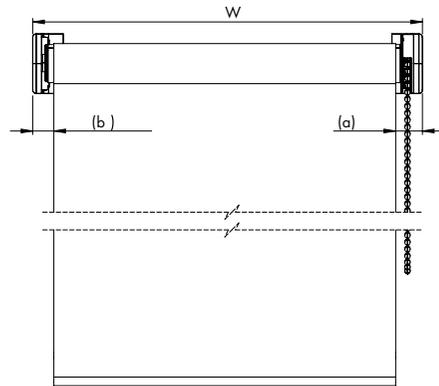

		in mm	
↔	MINIMUM WIDTH	600	
	MAXIMUM WIDTH	1800	
	MAXIMUM WIDTH WITH ZOOMTECH®	not possible	
	BRACKET SIZE	65 x 50	
	DIAMETER OF THE TUBE without fabric	32	
	MAXIMAL DIAMETER OF THE TUBE with fabric → determines the maximum height	62 *	

CONTROL
control side (a) — non-control side (b)

CHAIN METAL




Maximum tolerance for mounting is -5mm /+ 5mm.

CHAIN



PARTLIST

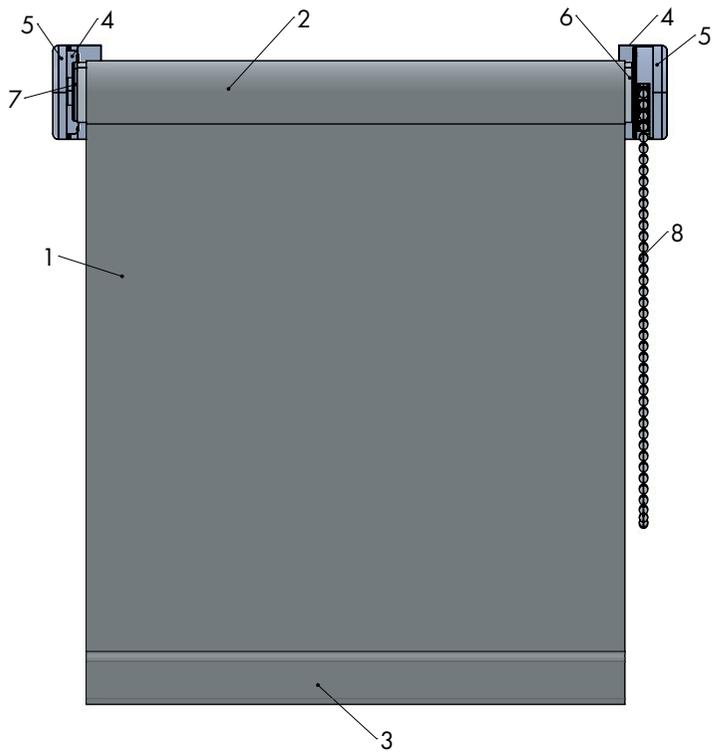

1	fabric
2	tube
3	bottom bar
4	bracket
5	bracket cover
6	chain mechanism
7	endcap
8	chain

! **LIMIT SETTINGS**
As a rule, it is possible to reduce the end position of the roller blind by 10 mm.

VARIANTS

STANDARD COLOUR

01 05 10
white grey black

FINB..



FINQ..



FINR..



CSE..






BOTTOM BAR




SIDE GUIDING 1MM

i In the event that the width of the blind is ordered without ZOOMTECH® technology and this technology is already recommended or mandatory here, possible deformation of the fabric, especially the so-called "V" effect, will not be the subject of a complaint.

SCALE: 1:3

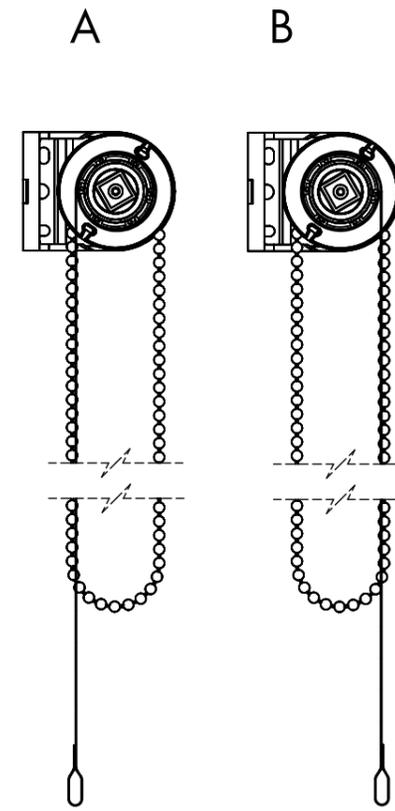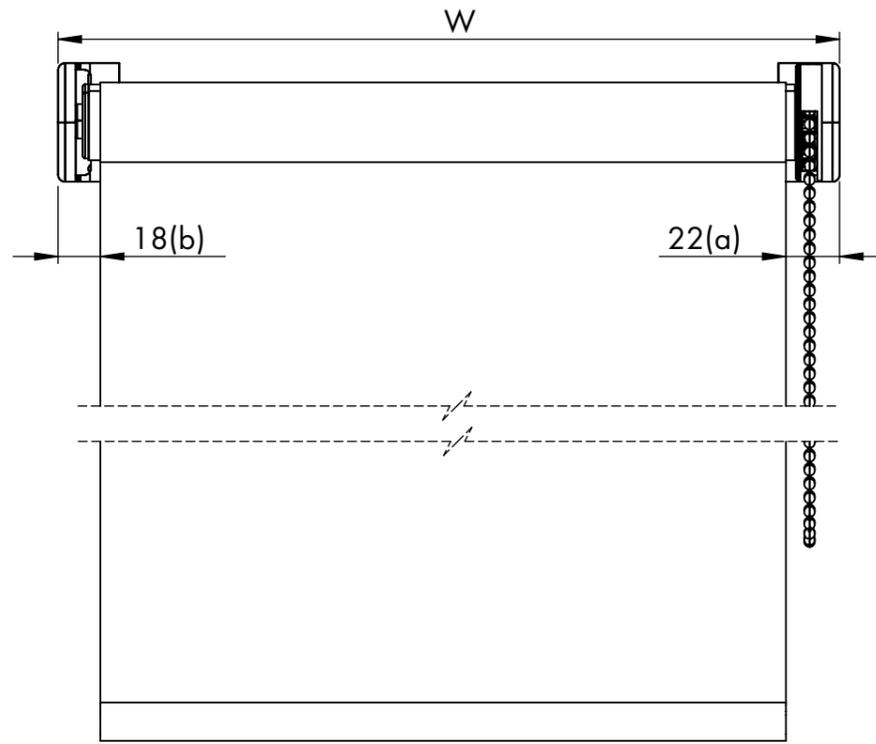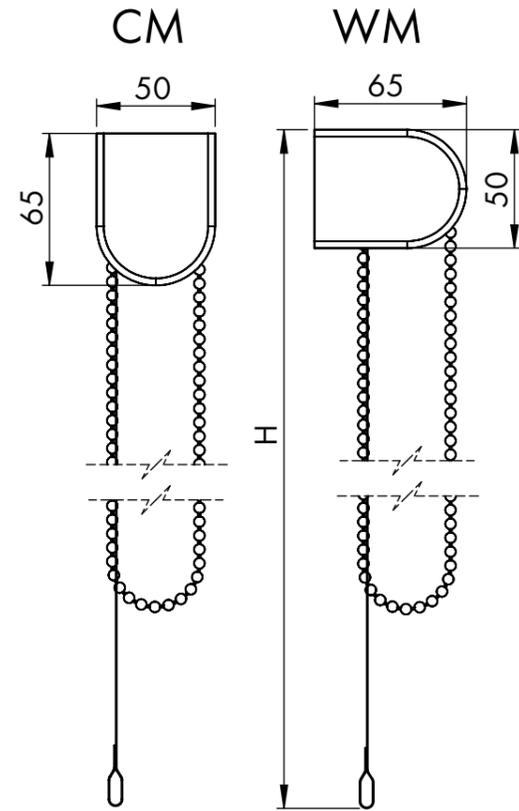

REN 32 CHAIN

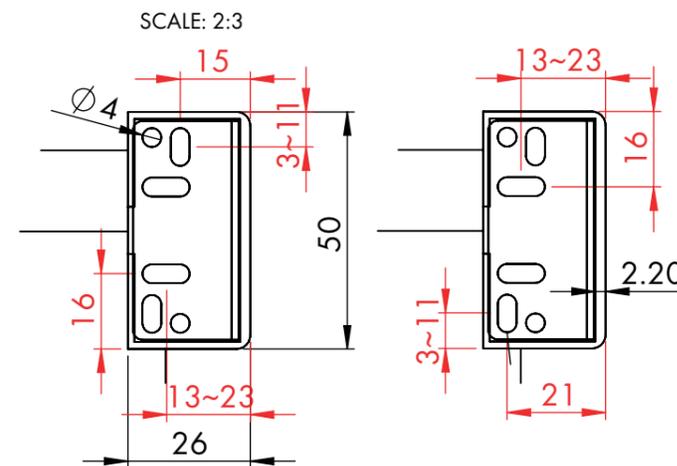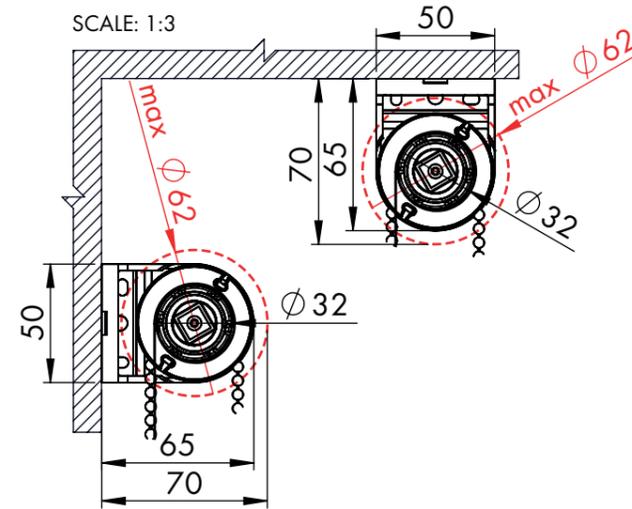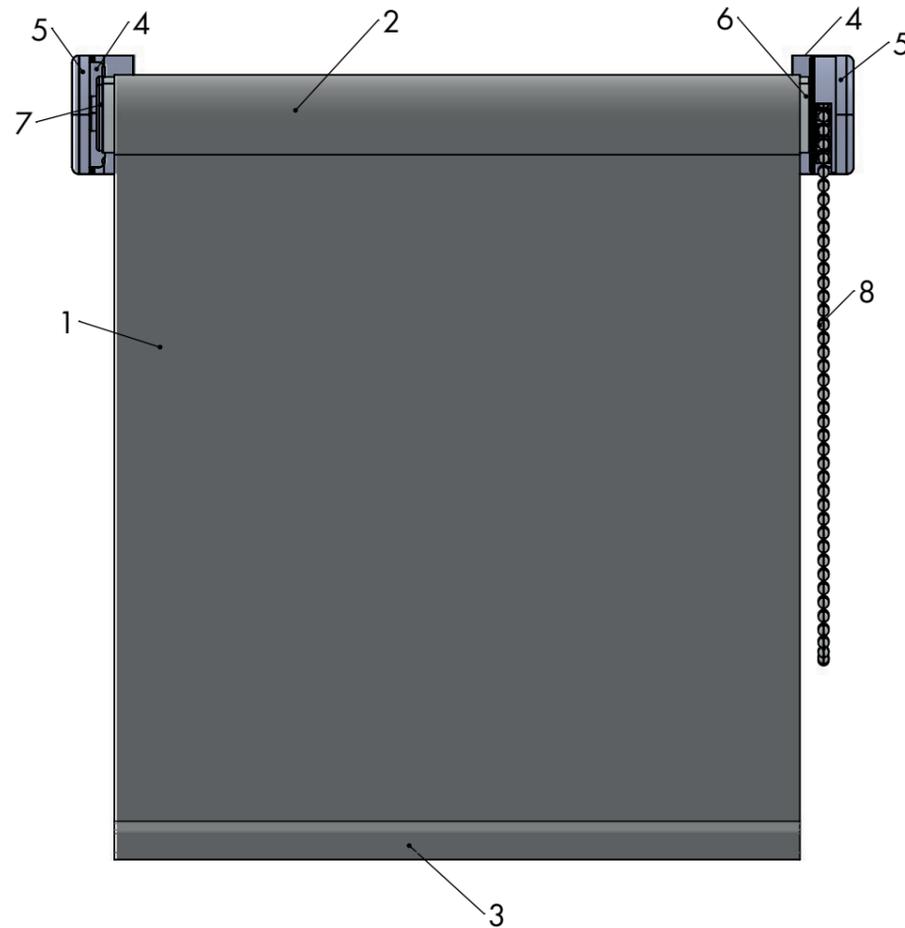

N	CODE	DESCRIPTION
1	F..	fabric
2	AX32	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	CHM..	chain mechanism
7	EC..	end cup
8	CH..	chain




PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..
- Chain CH..





FINB

SCALE: 1:3

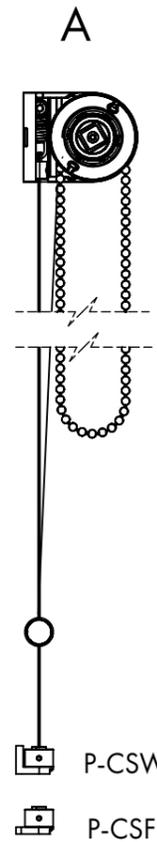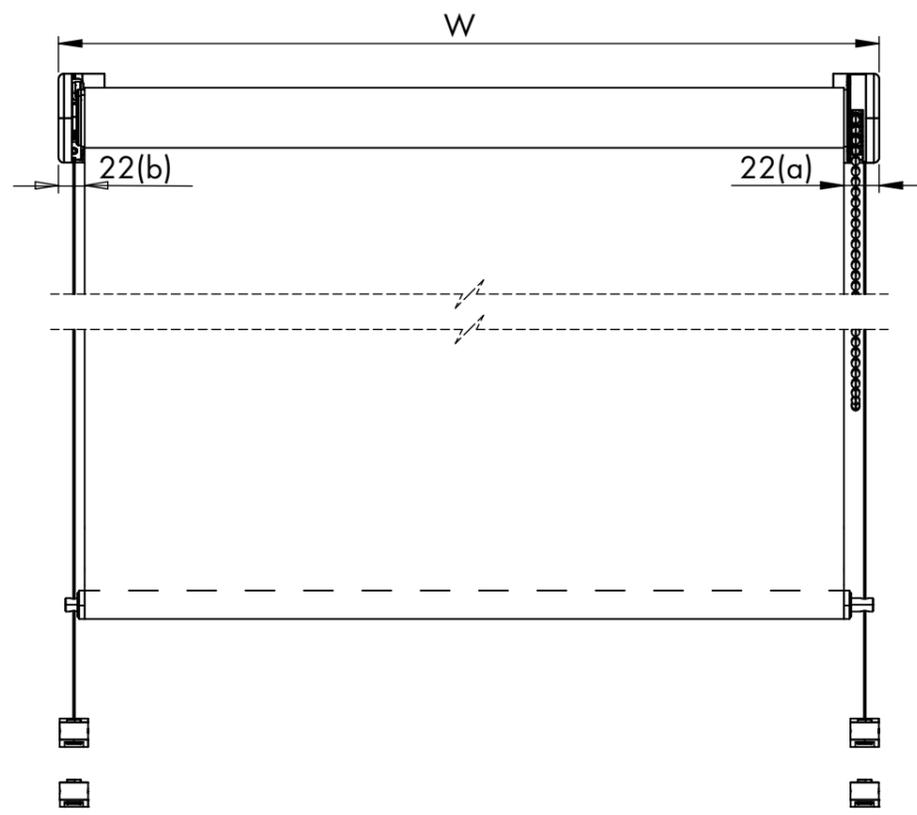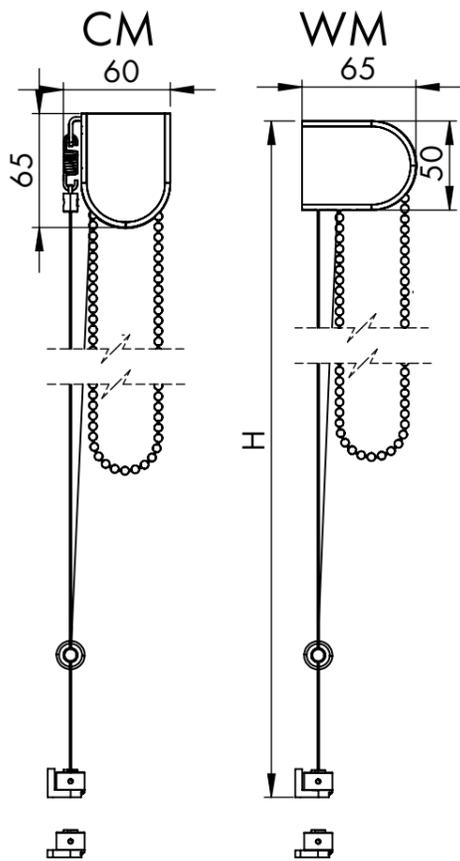


REN 32 with sideguide

CHAIN

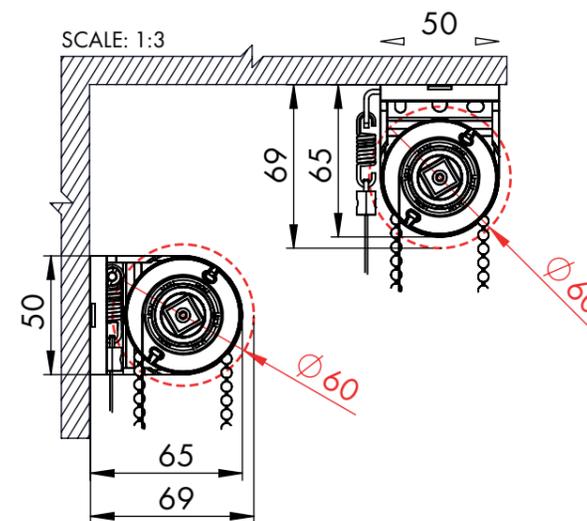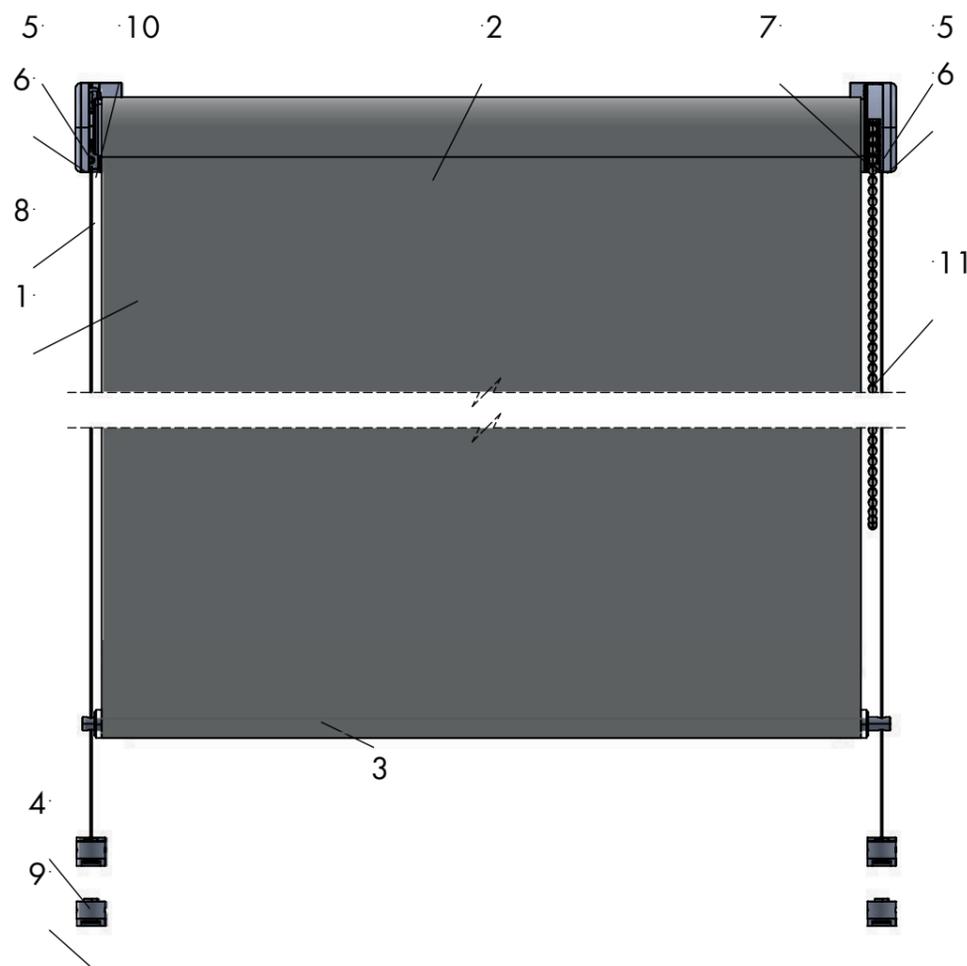

SCALE: 1:2

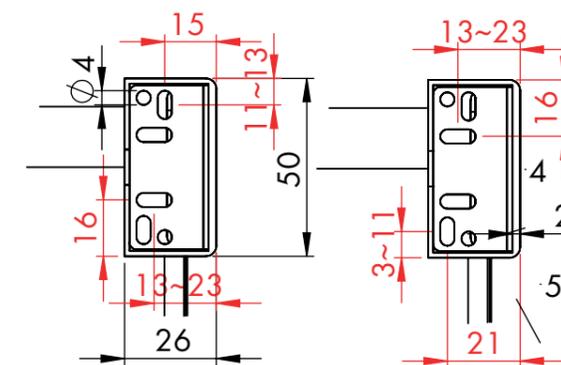

N	CODE	DESCRIPTION
1	F..	fabric
2	AX32	tube
3	FIN..	bottom bar
4	SGB..	sideguiding pin FIN
5	B..	bracket
6	BC..	bracket cover
7	CHM..	chain mechanism
8	SGT..	sideguiding top set
9	SGD..	sideguiding down bracket
10	EC..	end cup
11	CH..	chain


PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding only A
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..




FINB


REN 32

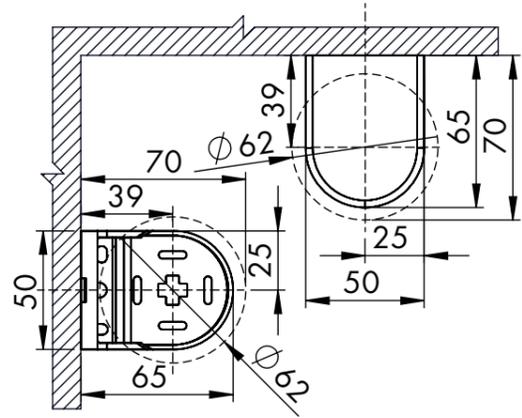


COVER 32 BRACKET 32 BRACKET 32

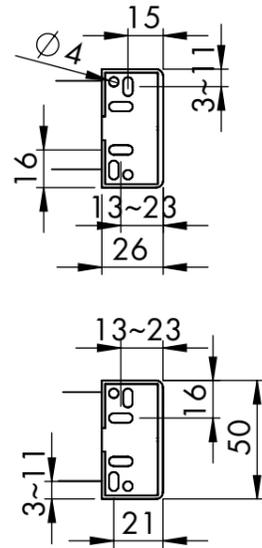


40

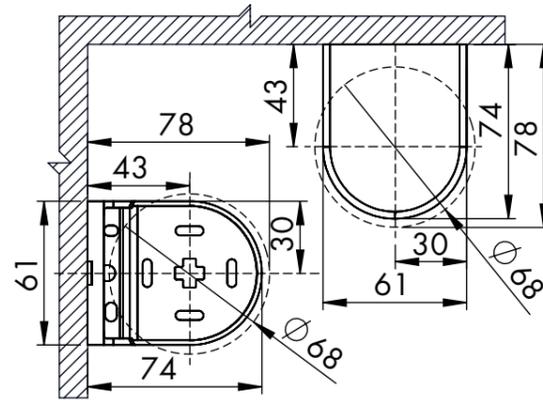


COVER 40 BRACKET 40 BRACKET 40

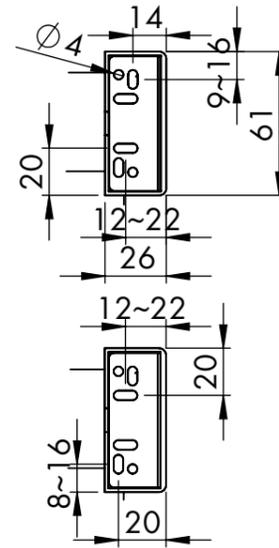


47

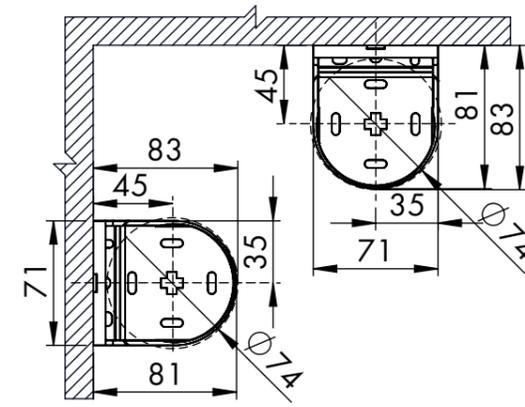


COVER 47 BRACKET 47 BRACKET 47

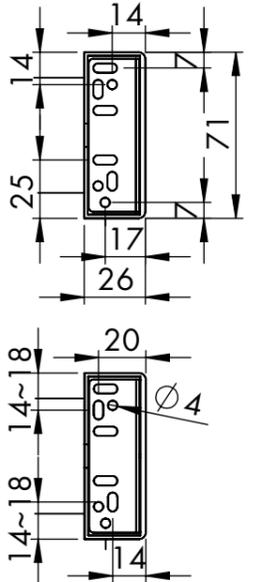




40 MP / 47 MP

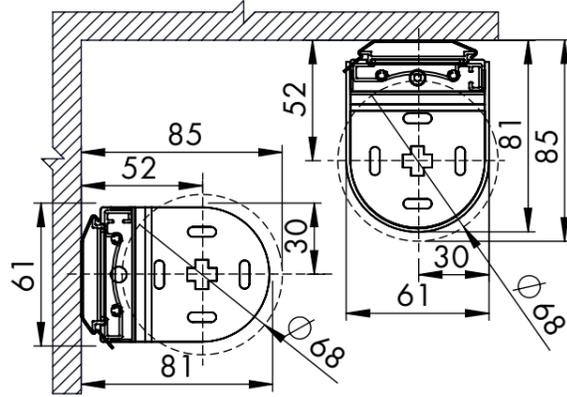




COVER 40 BRACKET 40 BRACKET 40 CLIP



47 - extension bracket

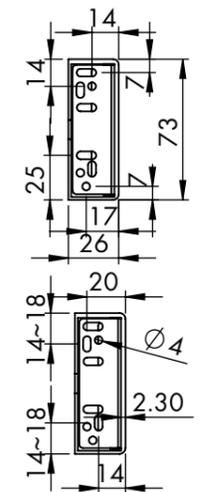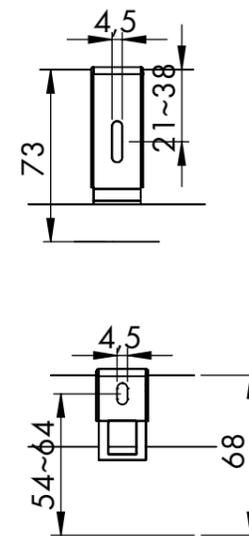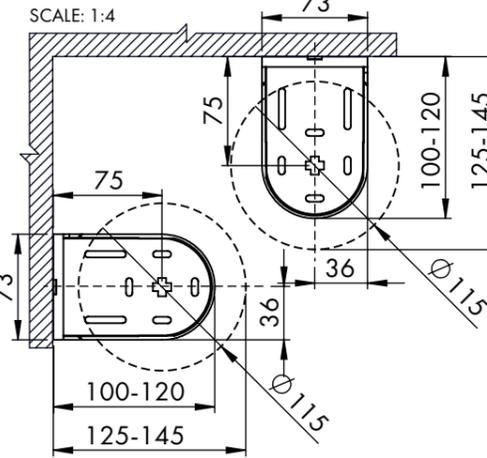


REN40

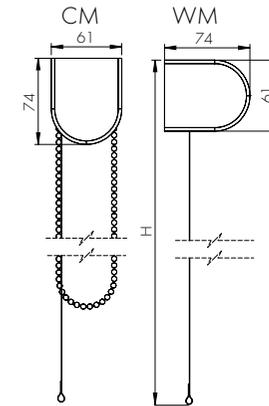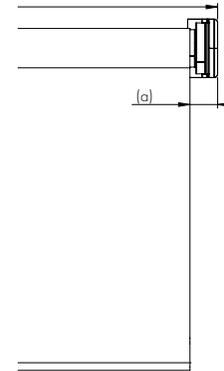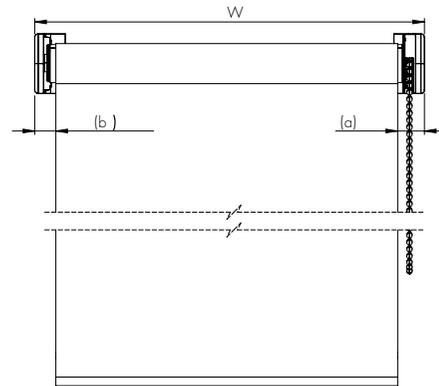


		in mm	CHAIN	ACCU MOTOR	230V MOTOR
	MINIMUM WIDTH	600	600	600	600
	MAXIMUM WIDTH	2200	2200	2200	2200
	MAXIMUM WIDTH (WITH ZOOMTECH [®])	not possible	∞ 4000	∞ 4000	∞ 4000
BRACKET SIZE		74 x 61	74 x 61	74 x 61	74 x 61
DIAMETER OF THE TUBE without fabric		40	43	43	43
MAXIMAL DIAMETER OF THE TUBE with fabric → determines the maximum height		68 *	68 *	68 *	68 *
CONTROL gap in mm control side (a) — non-control side (b) z = with ZOOMTECH [®]		CHAIN METAL	SOMFY ACCU RTS	SOMFY M SOMFY E SOMFY io SOMFY RTS	

Maximum tolerance for mounting is -5mm /+ 5mm.
For ZOOMTECH[®] -0/+5mm.

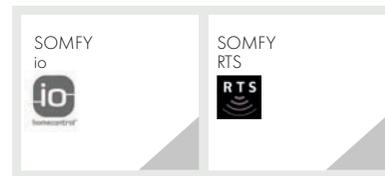

REN40

PARTLIST

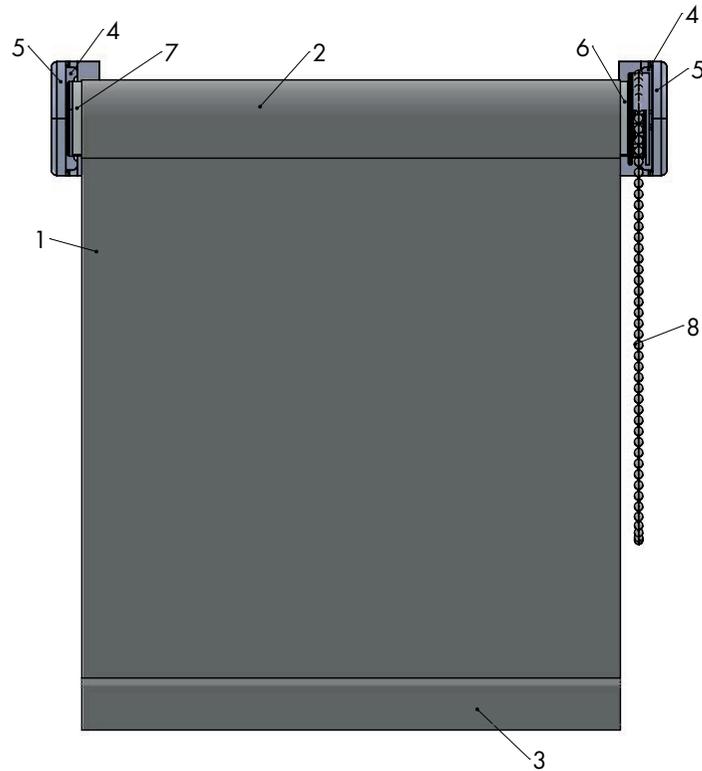

1	fabric
2	tube
3	bottom bar
4	bracket
5	bracket cover
6	chain mechanism
7	endcap
8	chain

LIMIT SETTINGS
As a rule, it is possible to reduce the end position of the roller blind by 10 mm.

VARIANTS

STANDARD COLOUR



P-CD..



DESIGN
COVERS

Design bracket covers, fit to the metal brackets with integrated magnets. Made out of exclusive selected light wood.

P-MP..



MOUNTING
PROFILE

Snaps into a few clips placed in advance into the ceiling or on the wall. Possibility to easily take off the blind.

P-68R



BOX
68

Slightly round aluminium cassette headbox, open from the bottom mounted on universal clips for ceiling or wall.

FINB..



hidden
Ø 16

P-FINQ..




wrapped
Ø 18

P-FINR..



visible
Ø 18

P-CSE..






Ø 16

BOTTOM
BAR



SIDE GUIDING
1 MM

i In the event that the width of the blind is ordered without ZOOMTECH® technology and this technology is already recommended or mandatory here, possible deformation of the fabric, especially the so-called "V" effect, will not be the subject of a complaint.


SCALE: 1:3

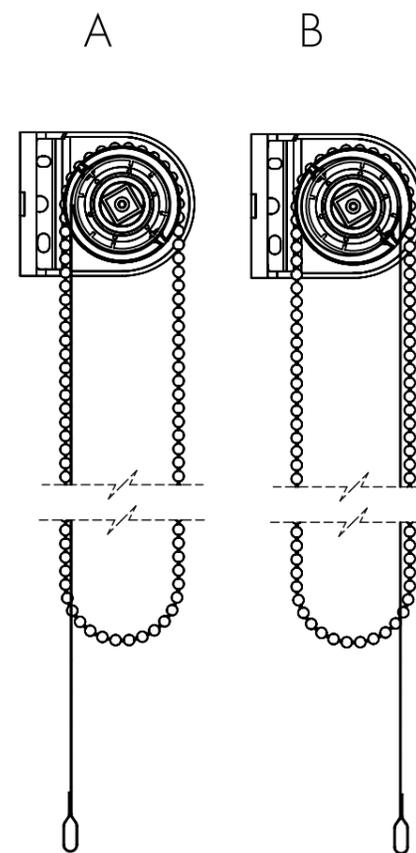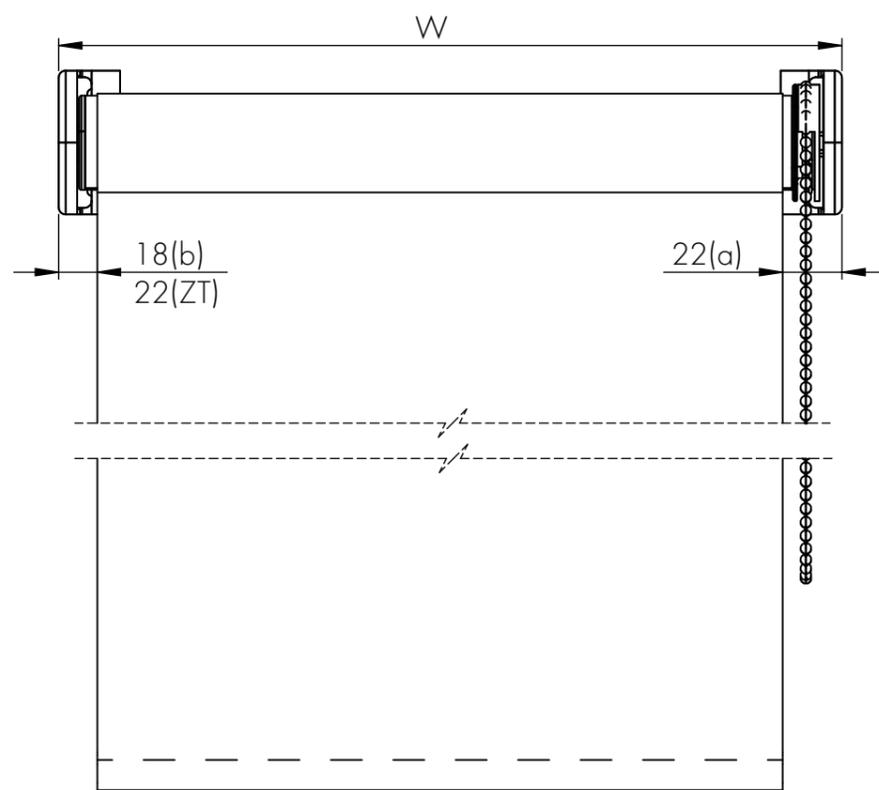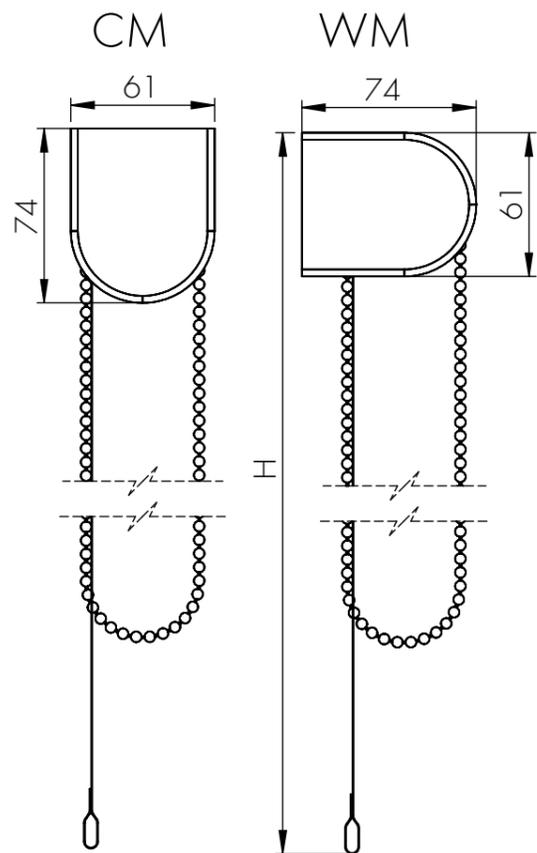

REN40 CHAIN

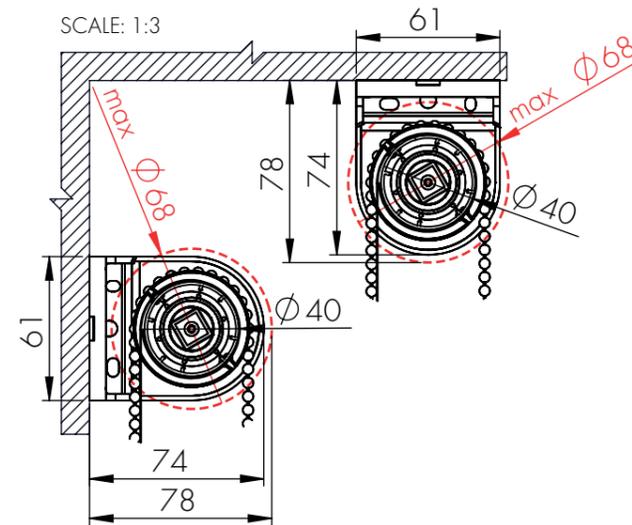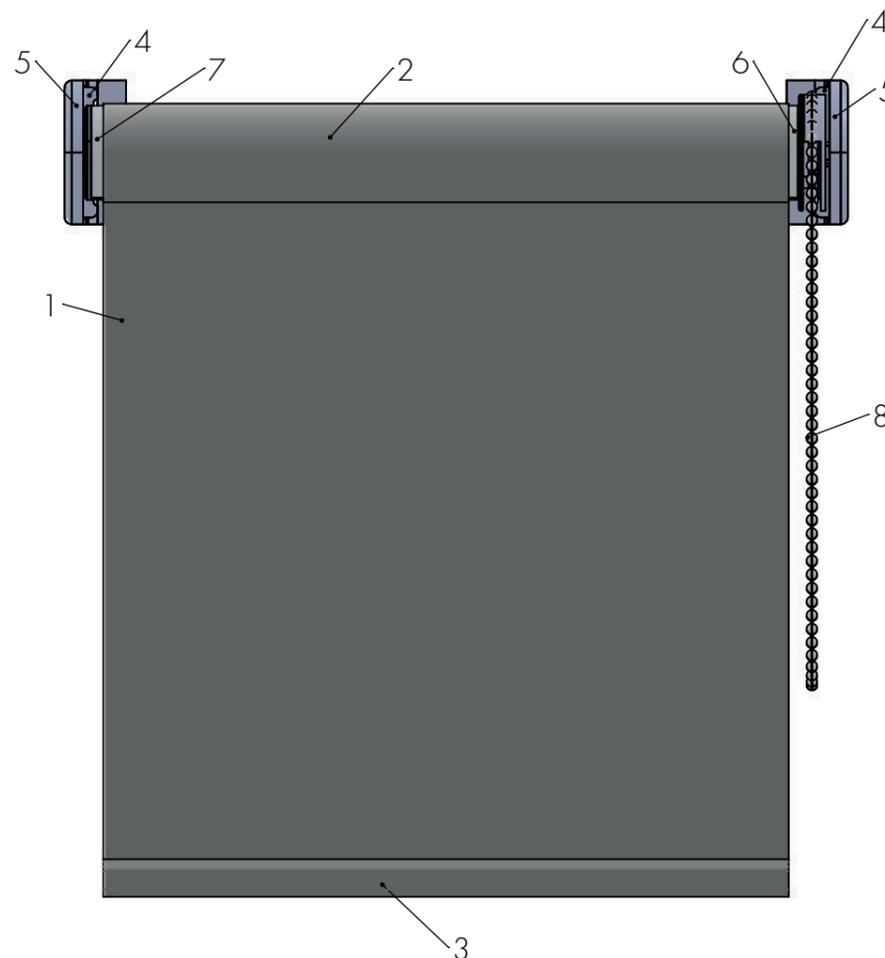

SCALE: 2:3

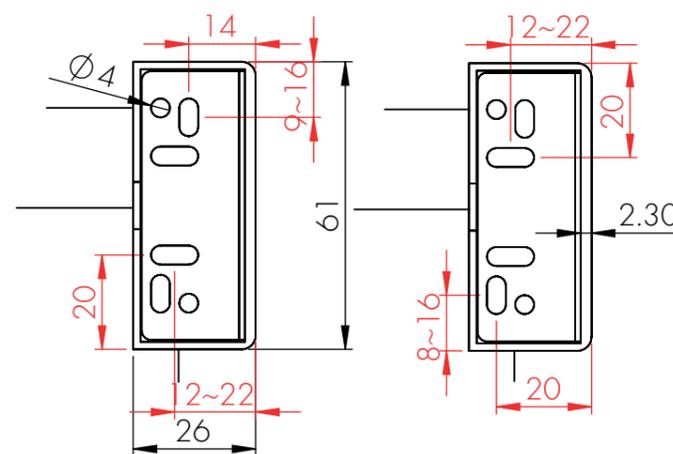

PARAMETERS




- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..
- Chain CH..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	CHM..	chain mechanism
7	EC..	end cup
8	CH..	chain







FINB

SCALE 1:3

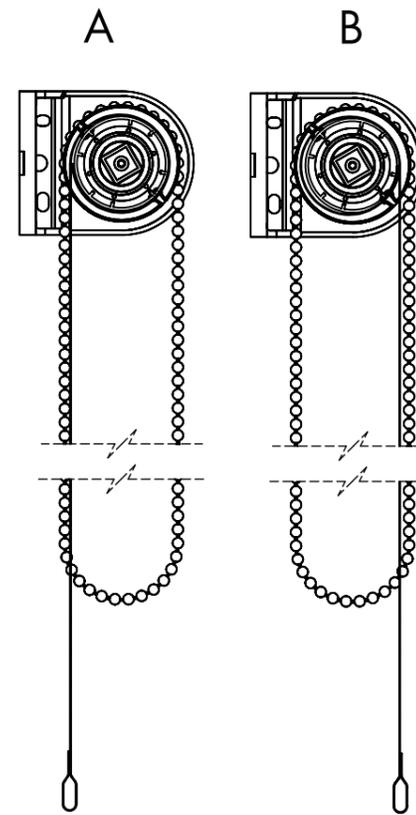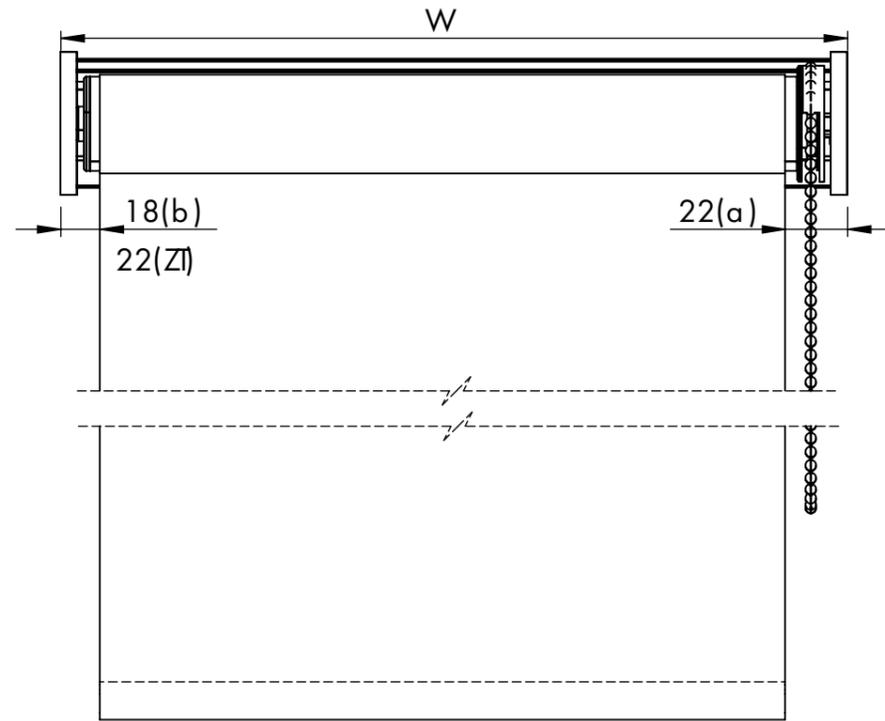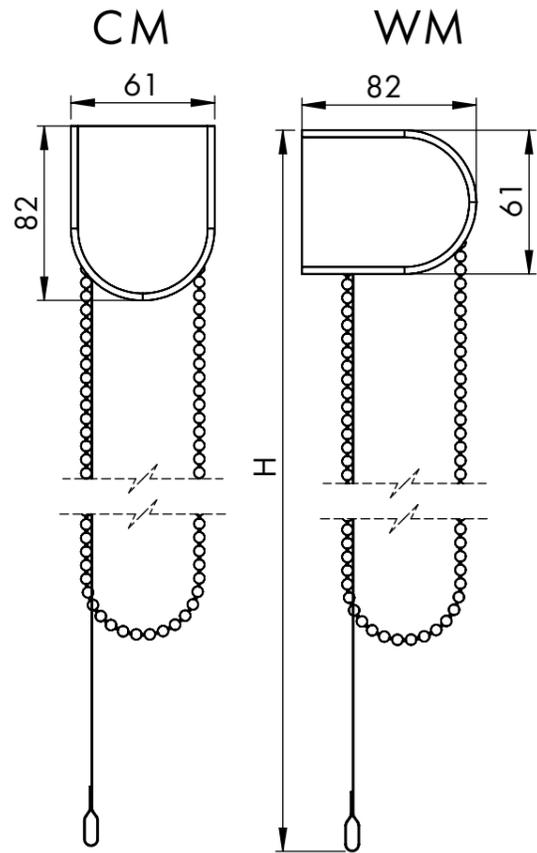

REN40 CHAIN

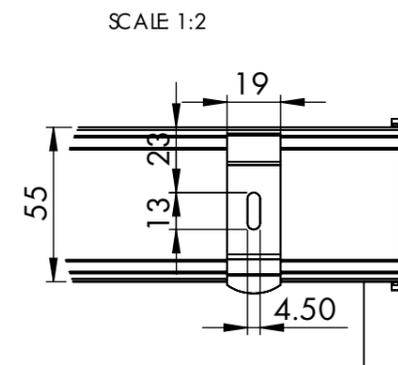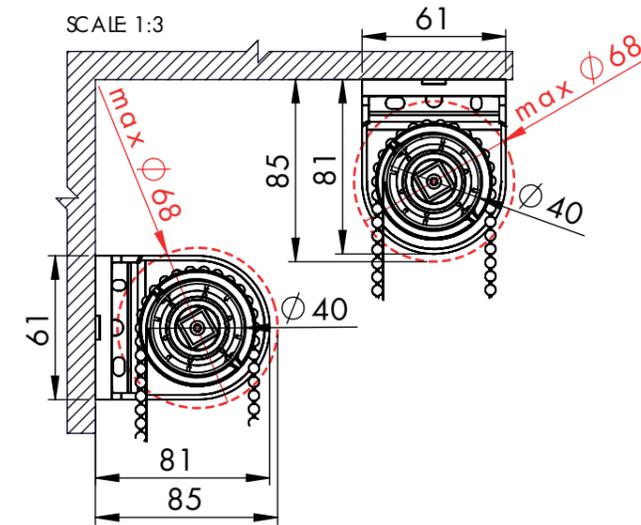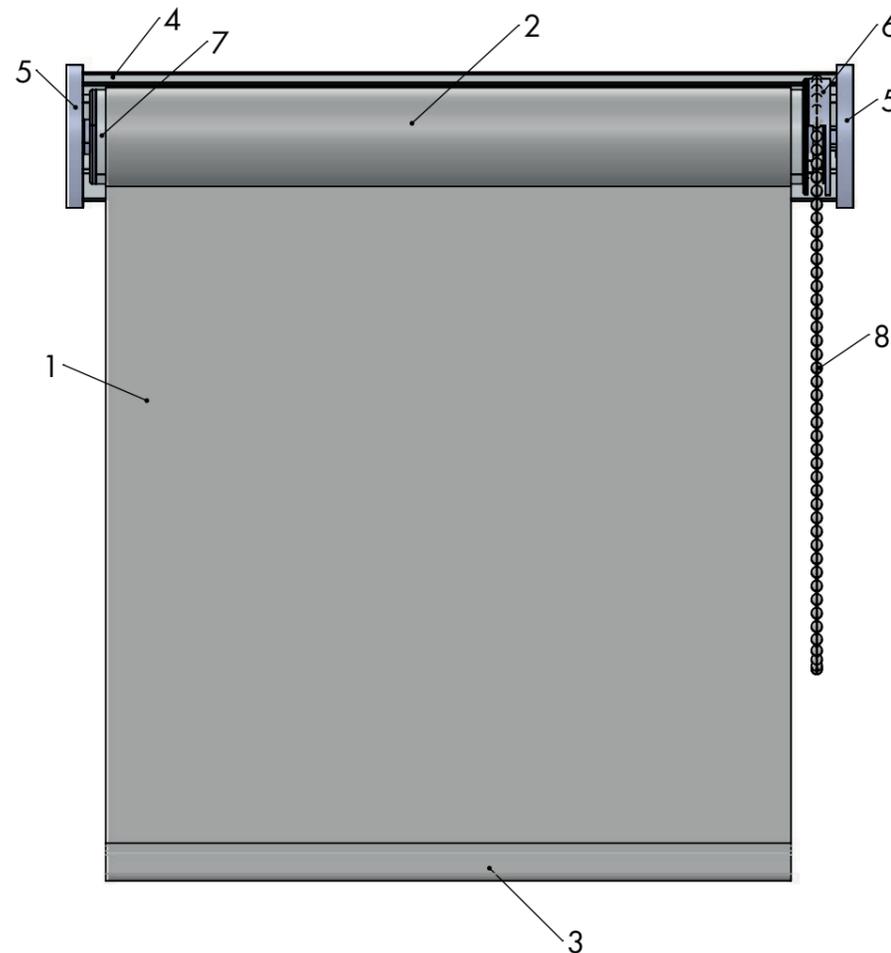

Variant P-MP

PARAMETERS




Width	W (in mm)
Height	H (in mm)
Fabric	F..
Unwinding	A or B (contra)
Mounting	WM (wall) or CM (ceiling)
Control Sde	L (left) or R (right)
Bottom bar	FIN..
Chain	CH..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	CHM..	chain mechanism
7	EC..	end cup
8	CH..	chain





FINB


SCALE 1:3

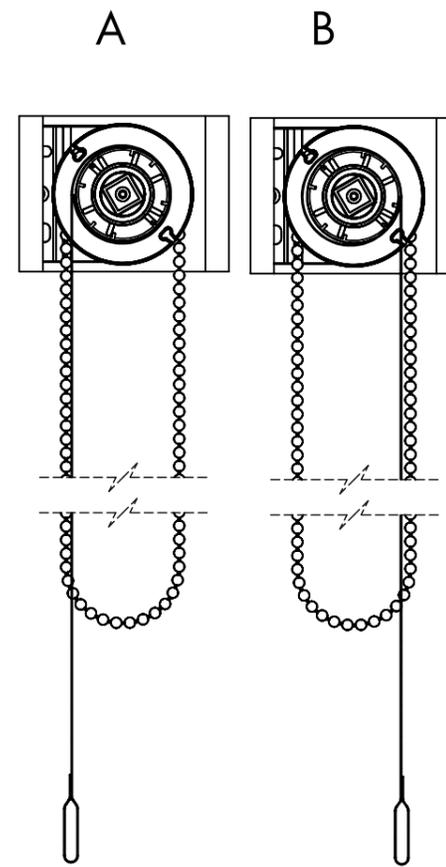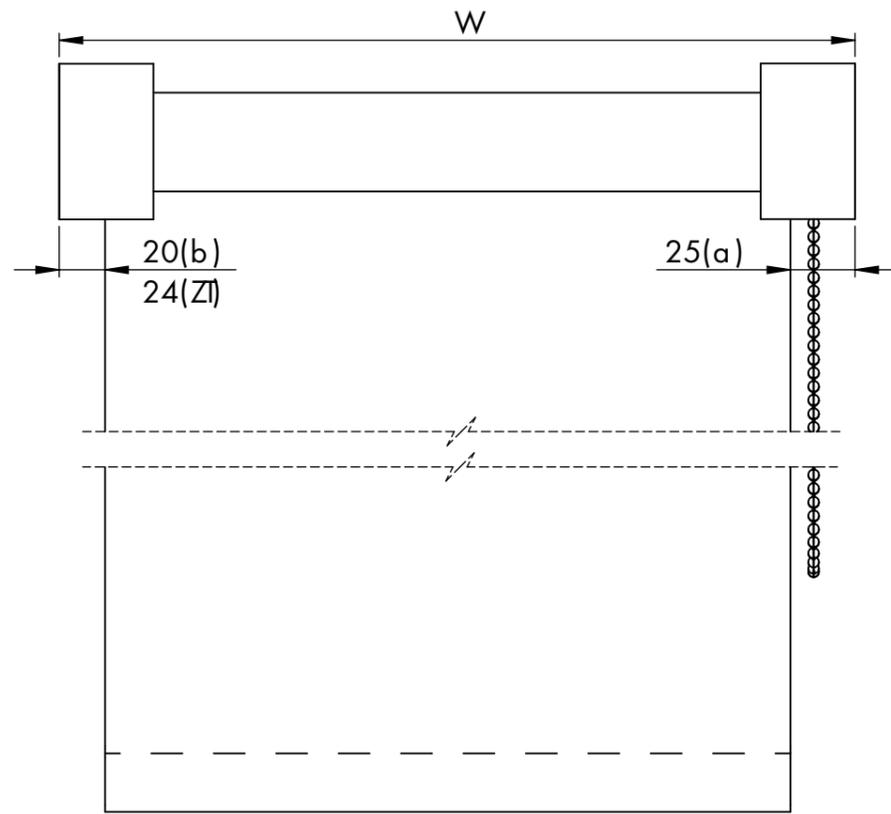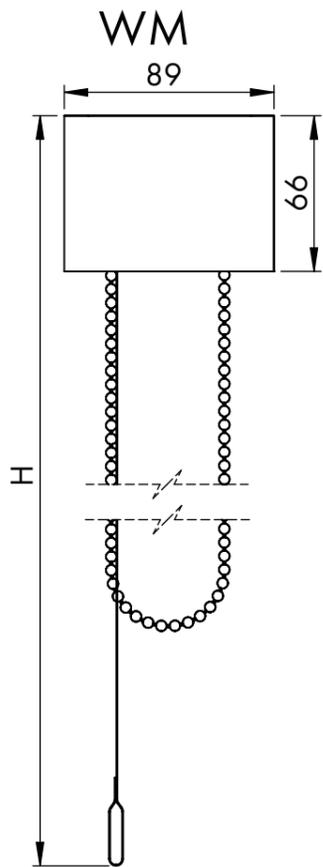


REN40 CHAIN

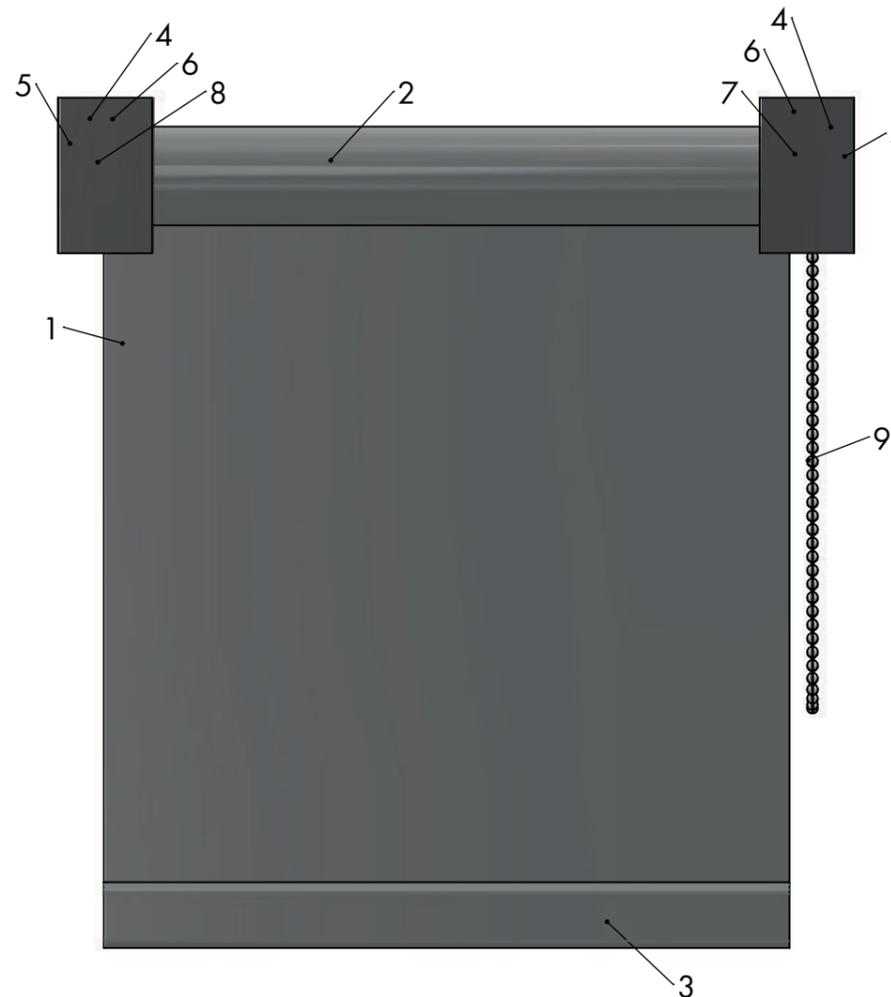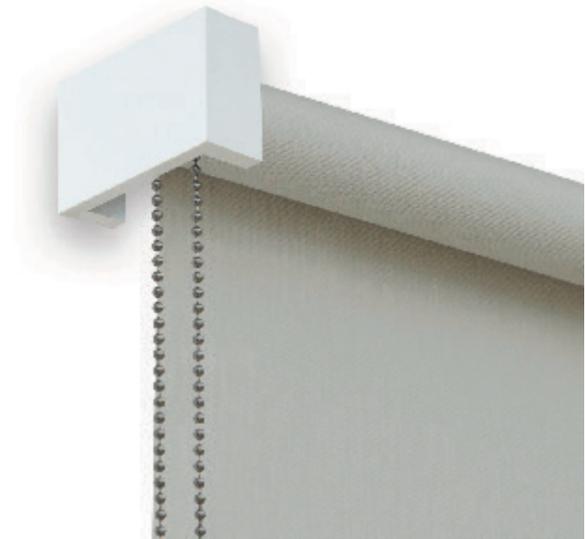

SCALE 1:3

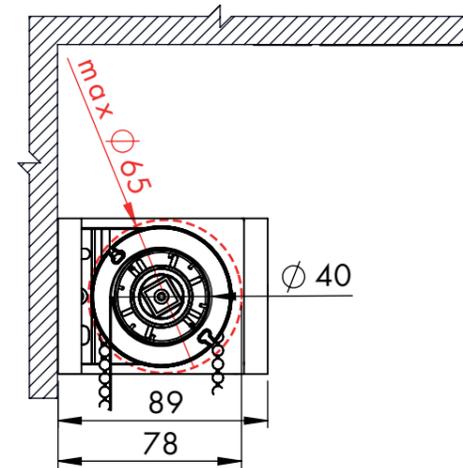

SCALE 2:3

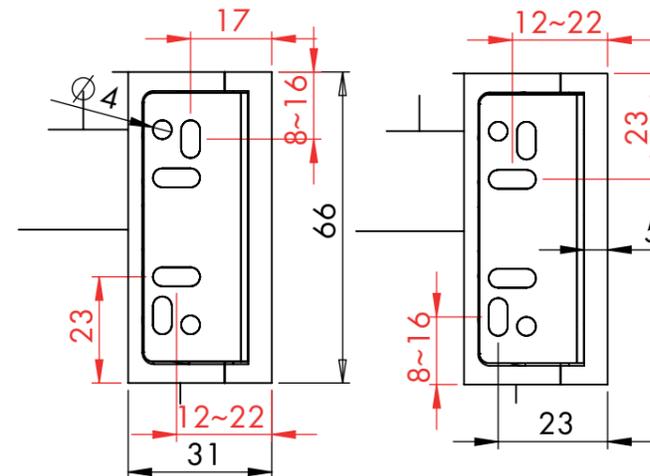


PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall)
- Control Side L (left) or R (right)
- Bottom bar FN..
- Chain CH..




N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	SC..	screw cover
7	CHM..	chain mechanism
8	EC..	end cup
9	CH..	chain



SCALE 1:3

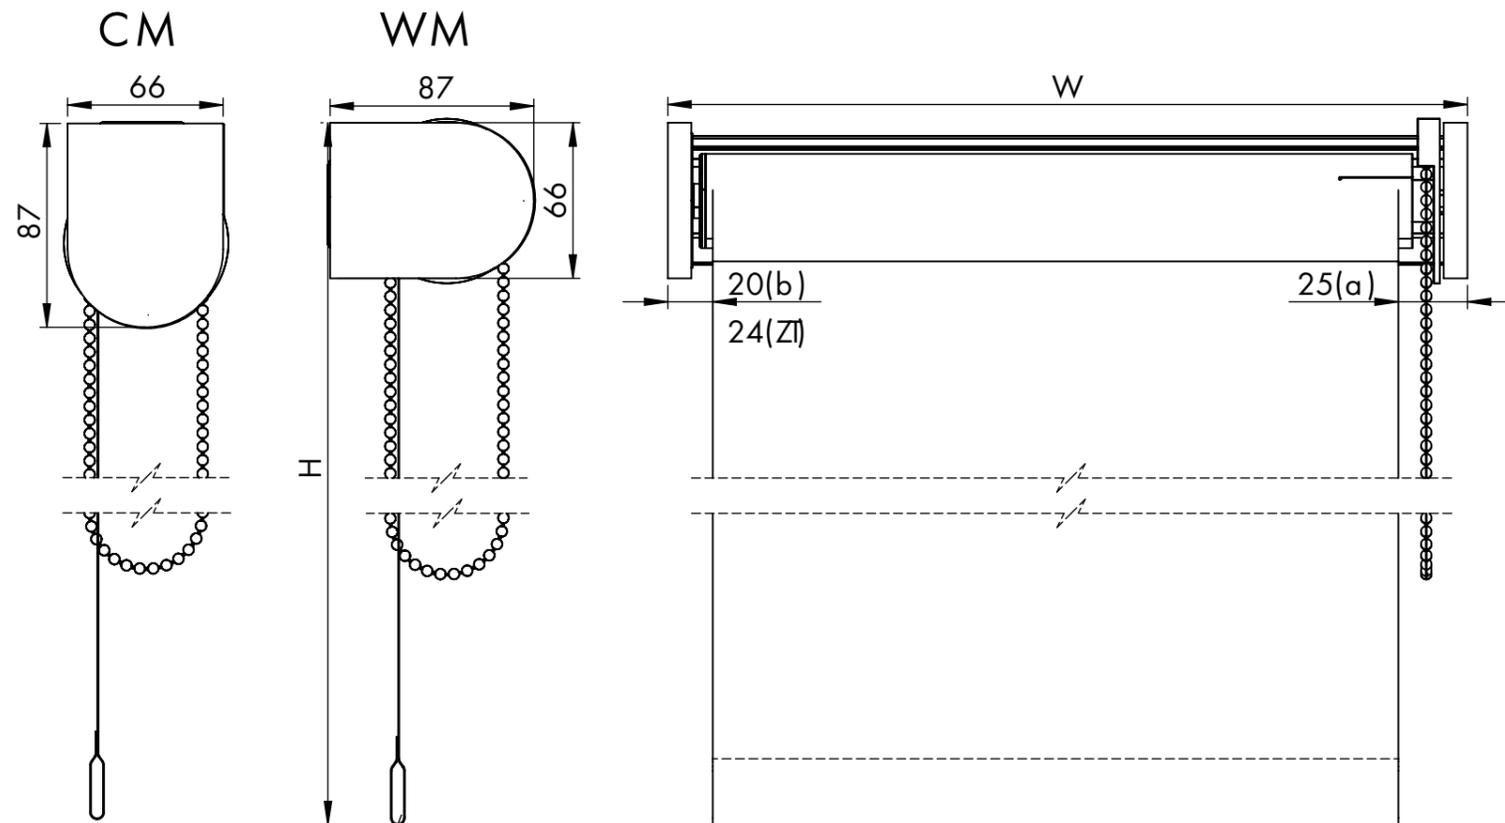

REN40 CHAIN

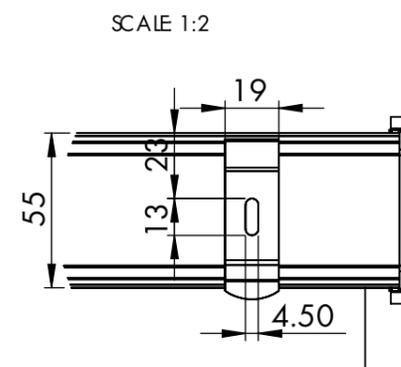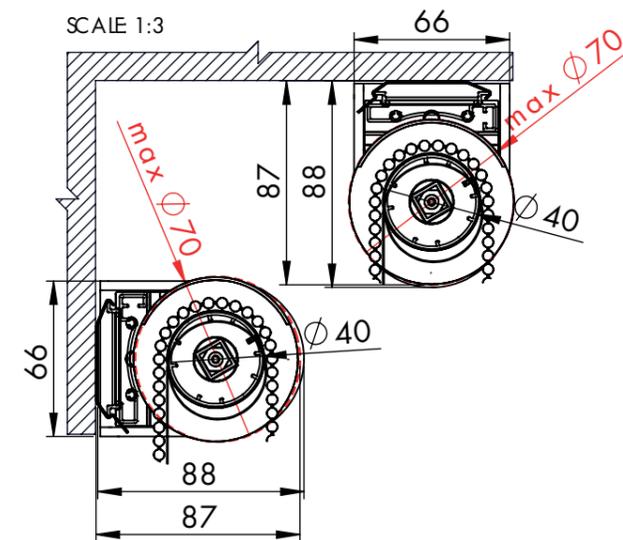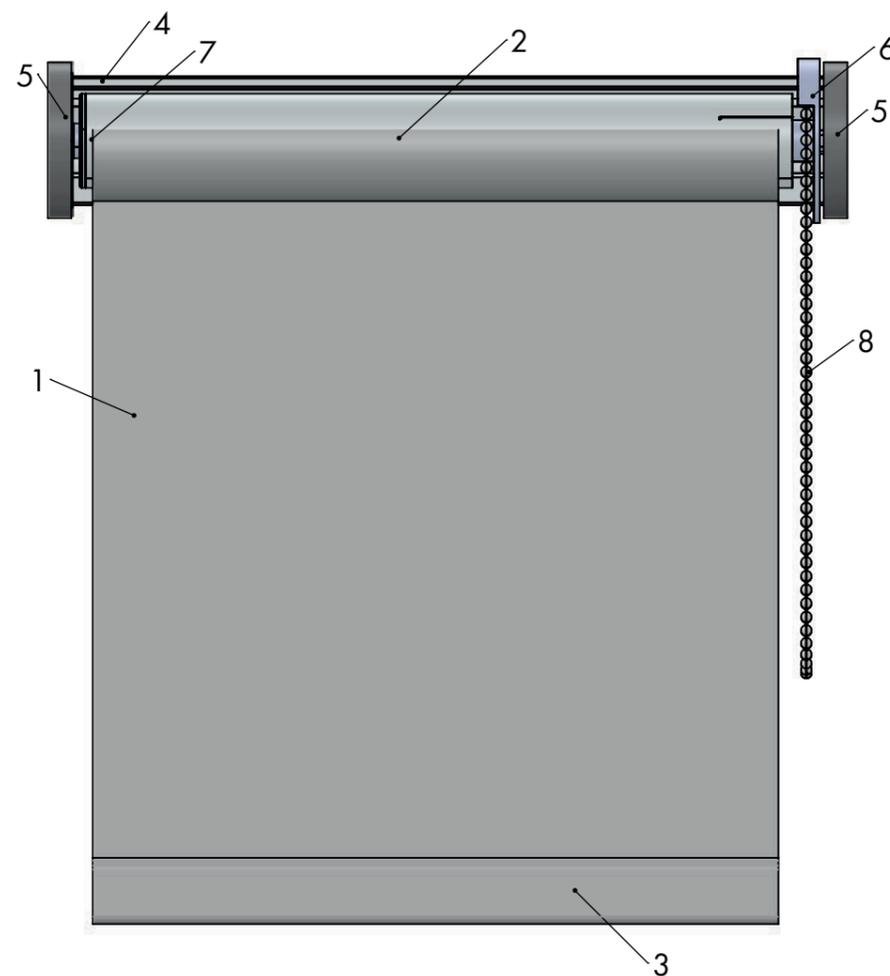

PARAMETERS



Width	W (in mm)
Height	H (in mm)
Fabric	F..
Unwinding	A or B (contra)
Mounting	WM (wall) or CM (ceiling)
Control Side	L (left) or R (right)
Bottom bar	FN..
Chain	CH..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	CHM..	chain mechanism
7	EC..	end cup
8	CH..	chain






FN.B

SCALE 1:3

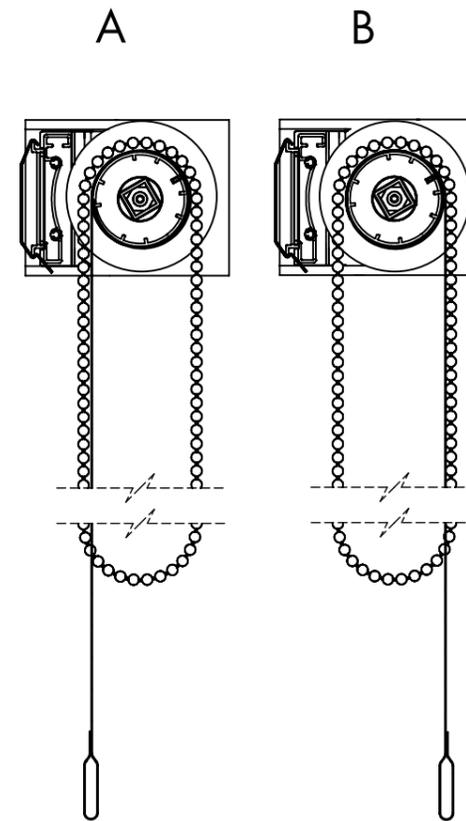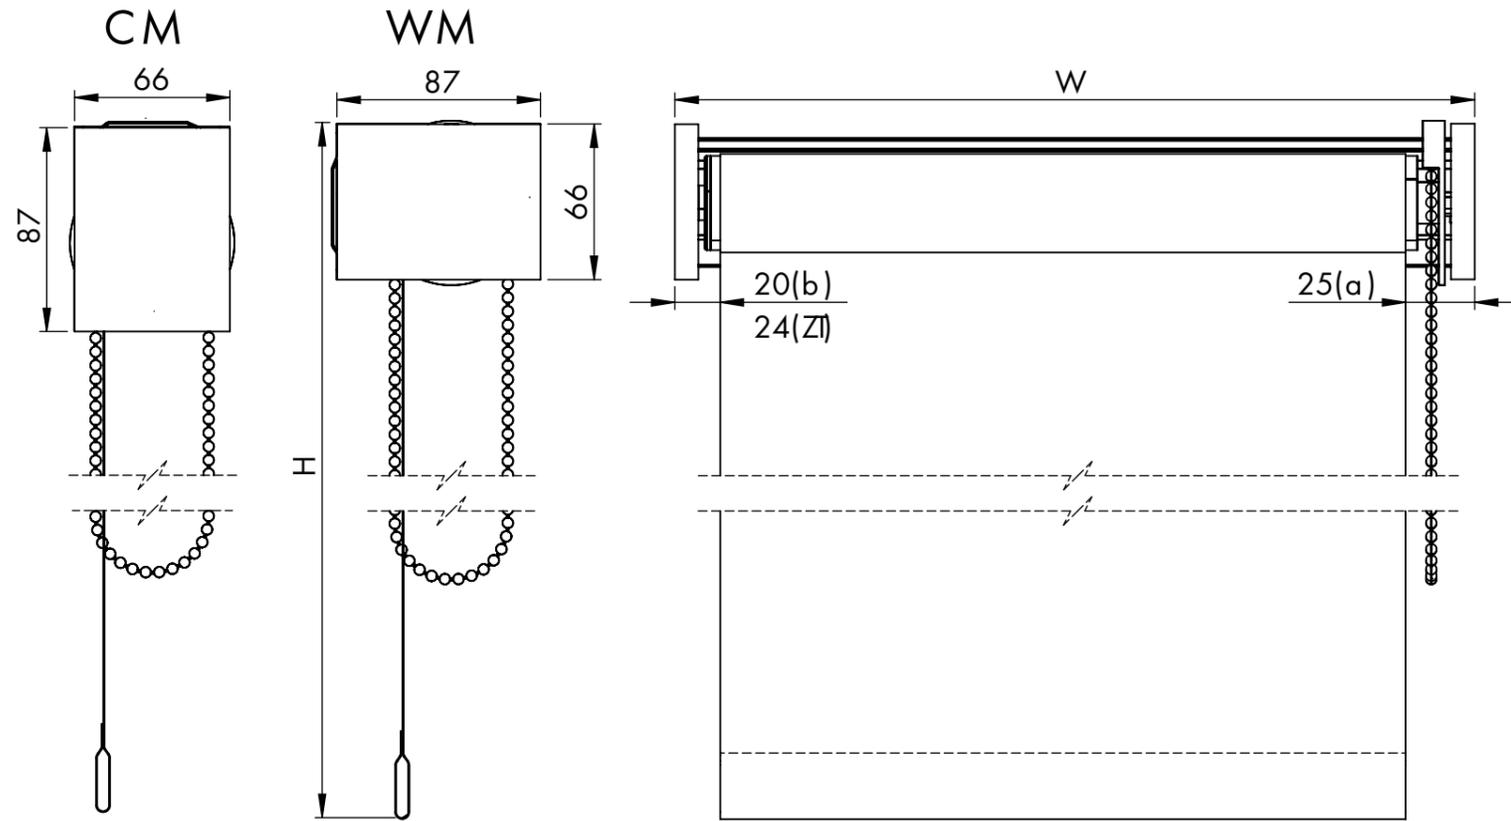

REN40 CHAIN

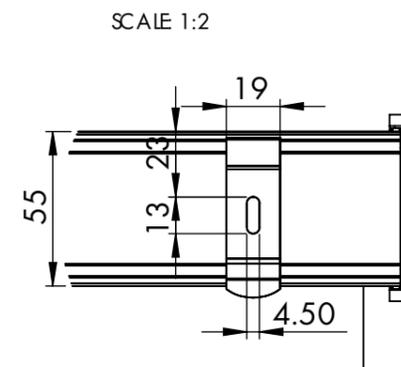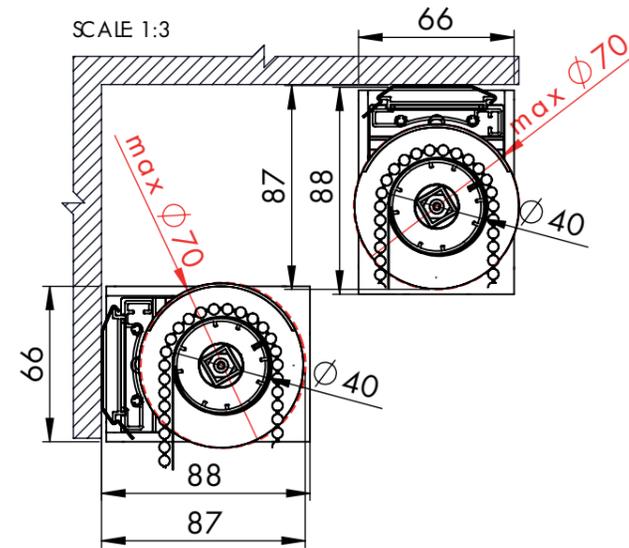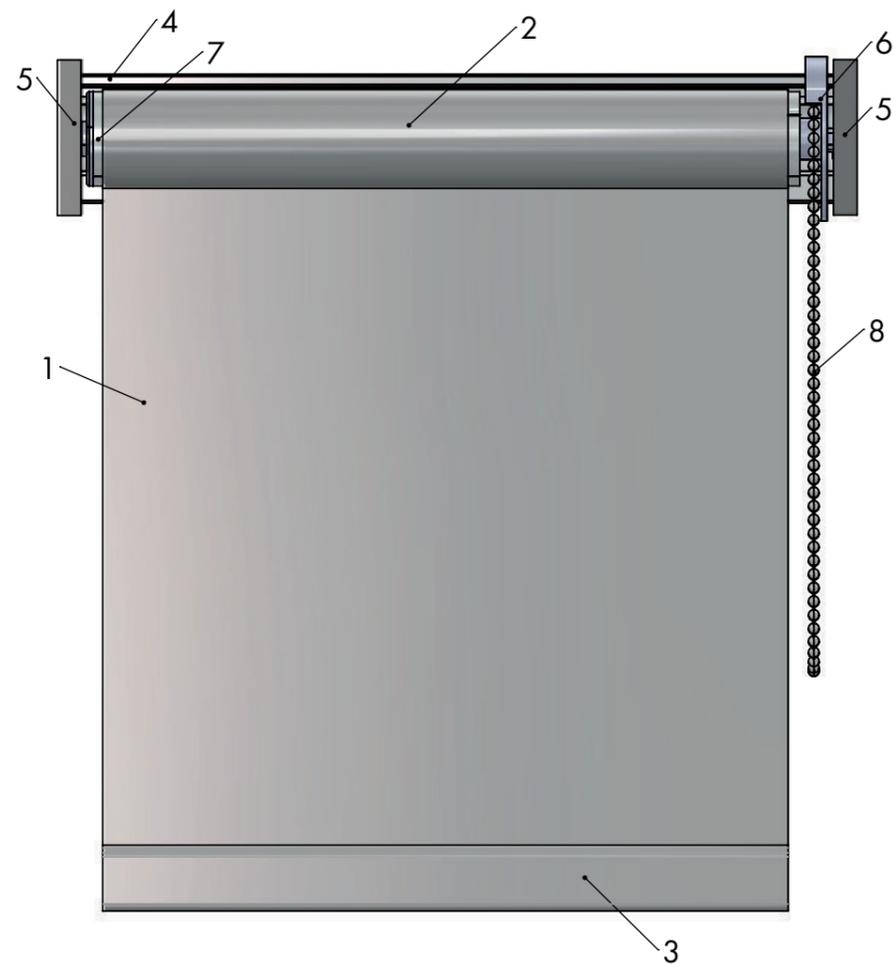

PARAMETERS




Width	W (in mm)
Height	H (in mm)
Fabric	F..
Unwinding	A or B (contra)
Mounting	WM (wall) or CM (ceiling)
Control Side	L (left) or R (right)
Bottom bar	FN..
Chain	CH..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	CHM..	chain mechanism
7	EC..	end cup
8	CH..	chain





FN..


SCALE 1:3

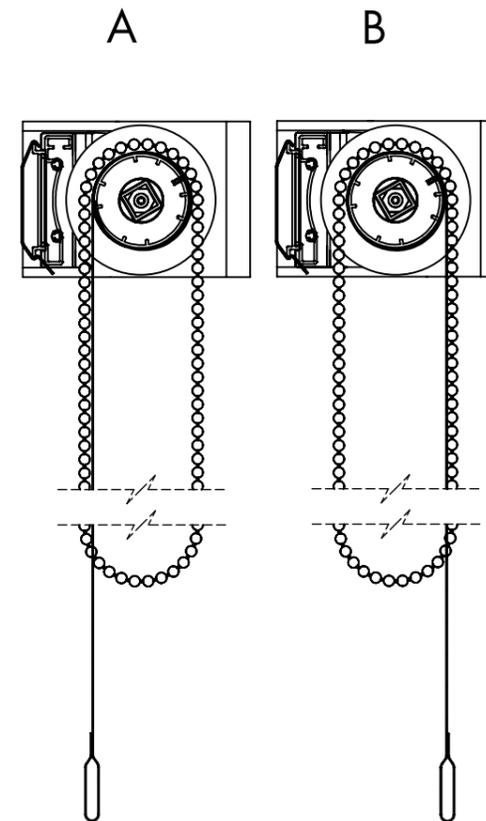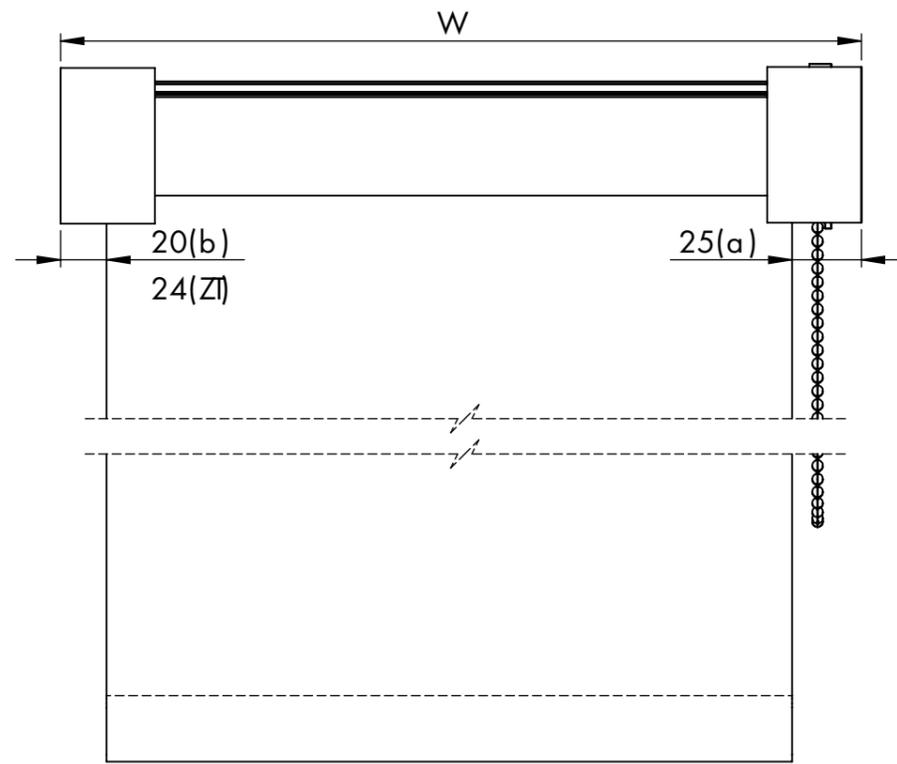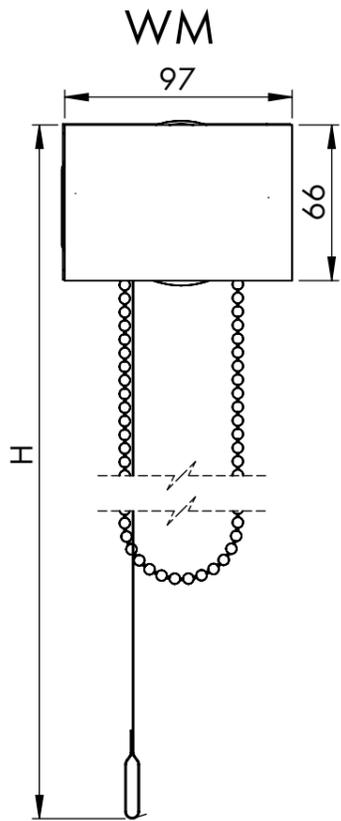


REN40 CHAIN

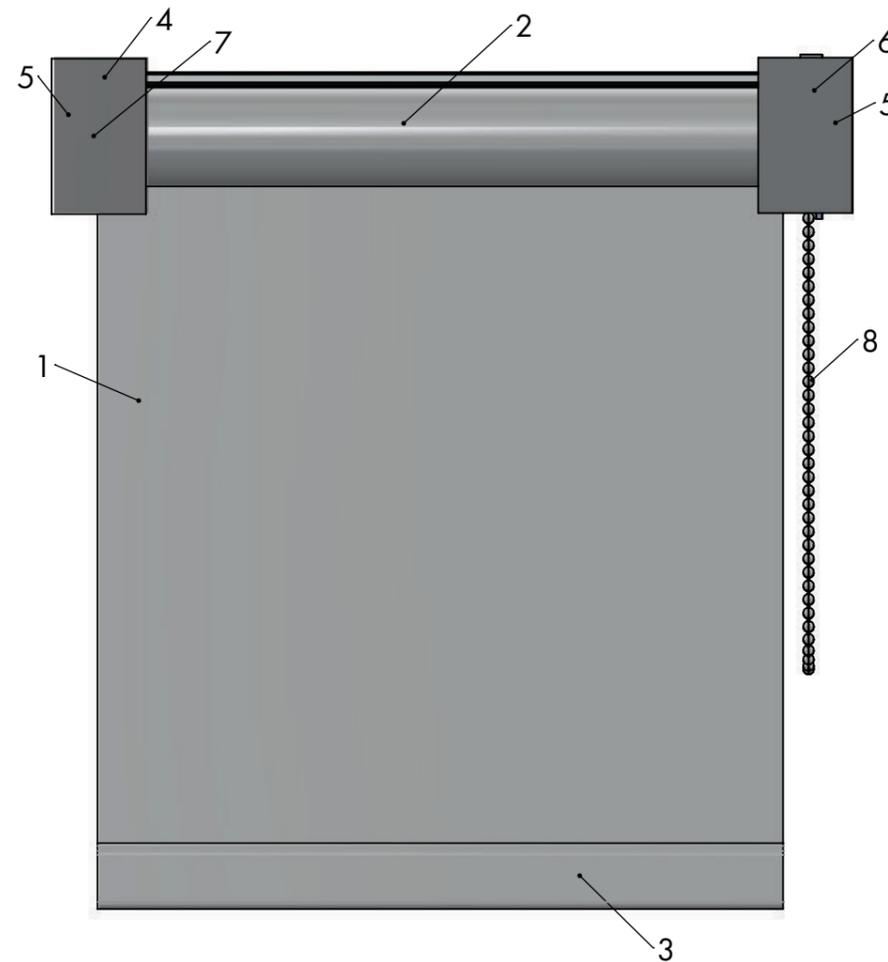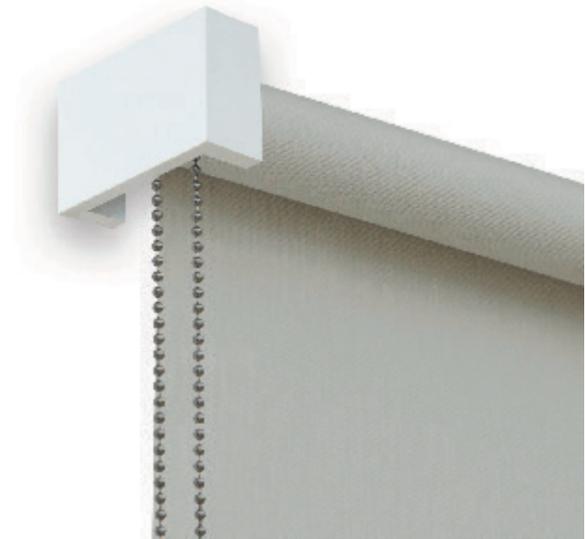

SCALE 1:3

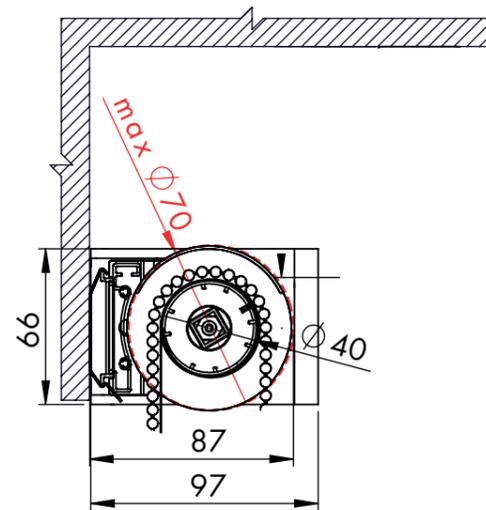

SCALE 1:2

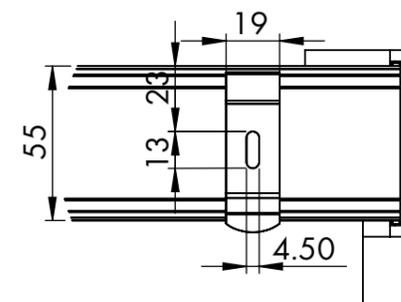

PARAMETERS


- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall)
- Control Side L (left) or R (right)
- Bottom bar FN..
- Chain CH..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	CHM..	chain mechanism
7	EC..	end cup
8	CH..	chain






FN B

SCALE 1:5

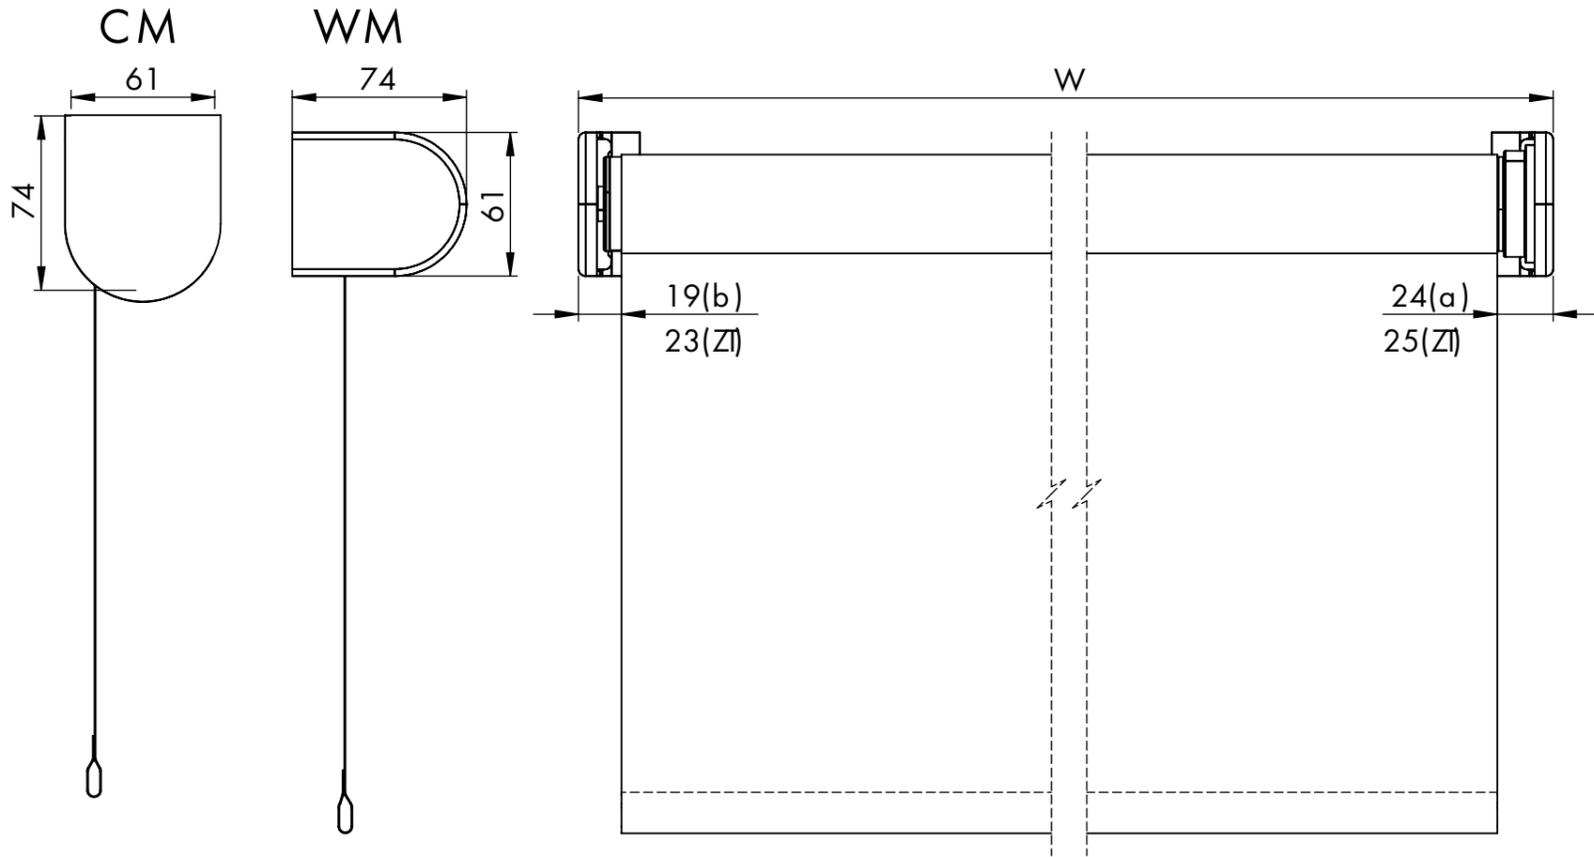

REN40 ACCUMOTOR SOMFY RTS

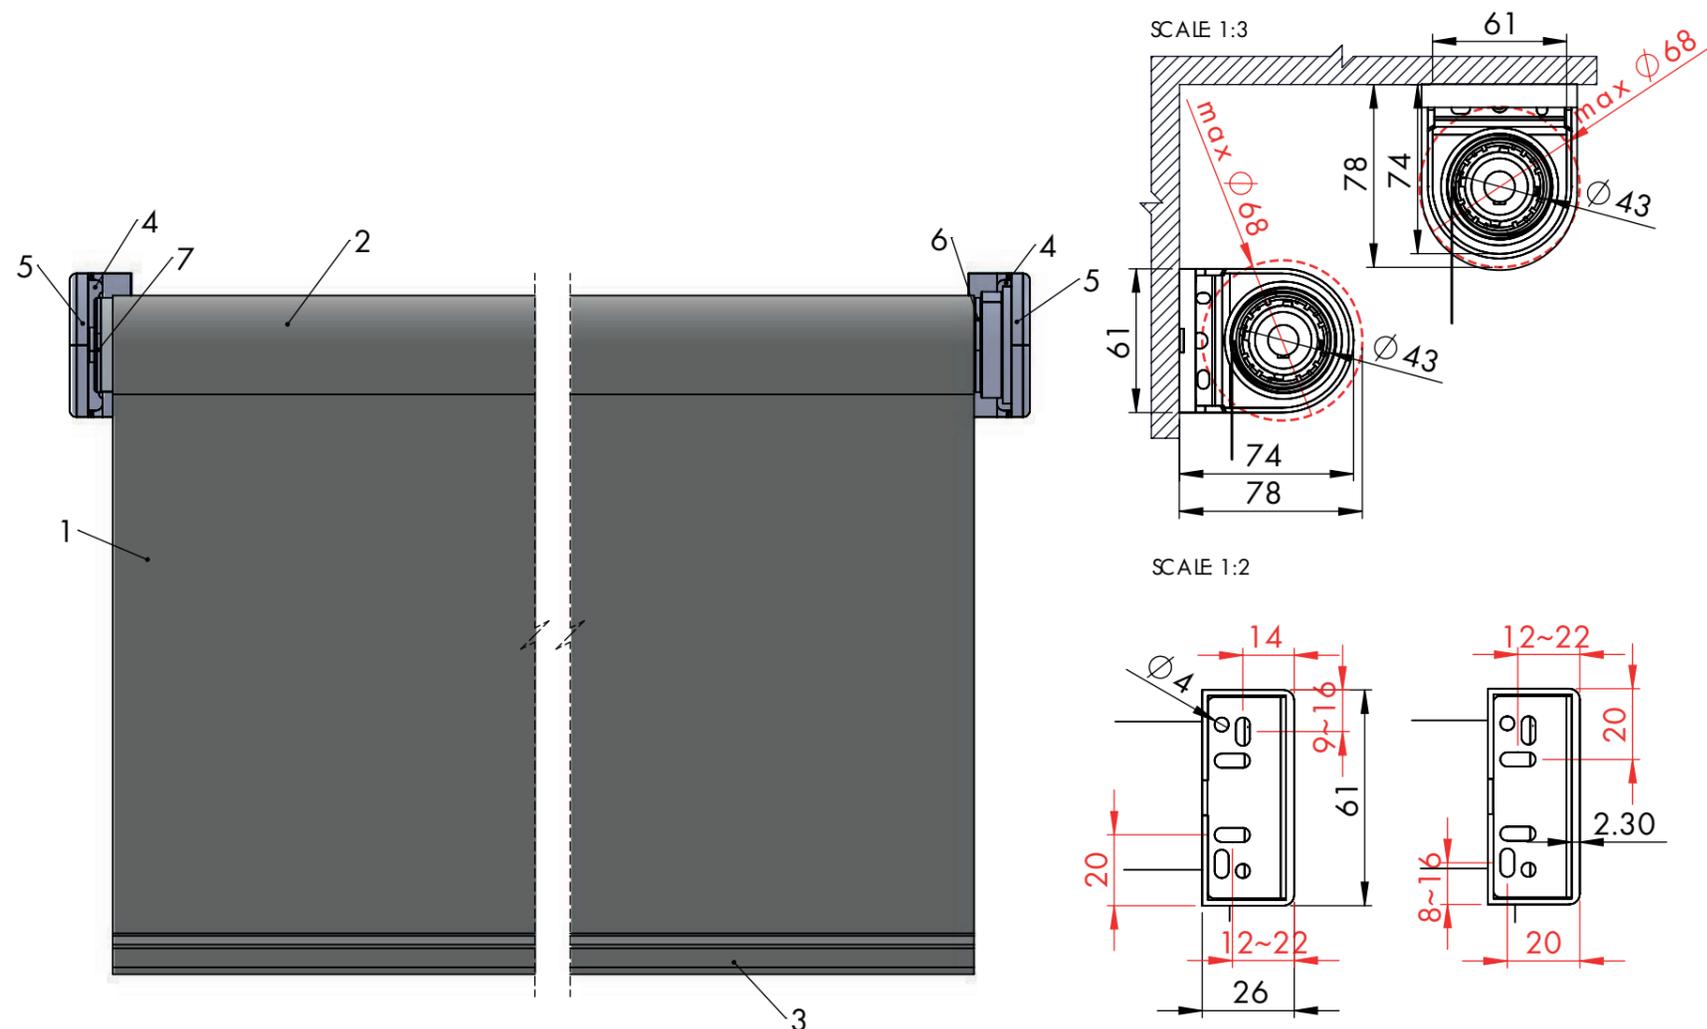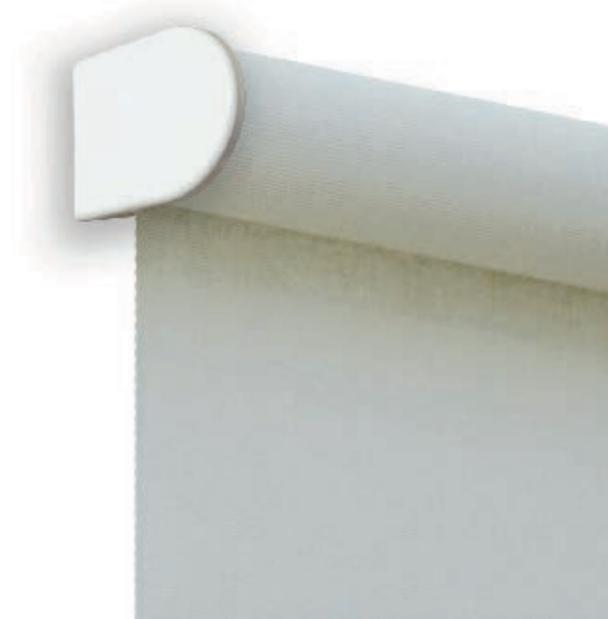

N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT.	motor + adapter
7	EC..	end cup



PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FN..






FNB

SCALE 1:5

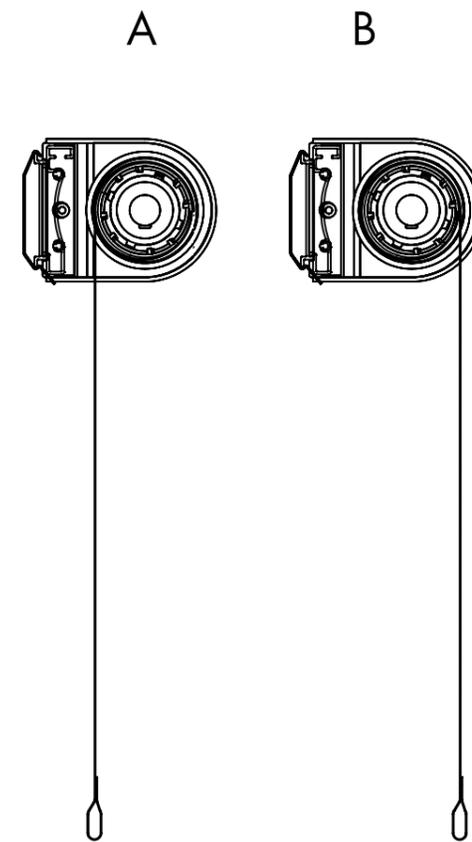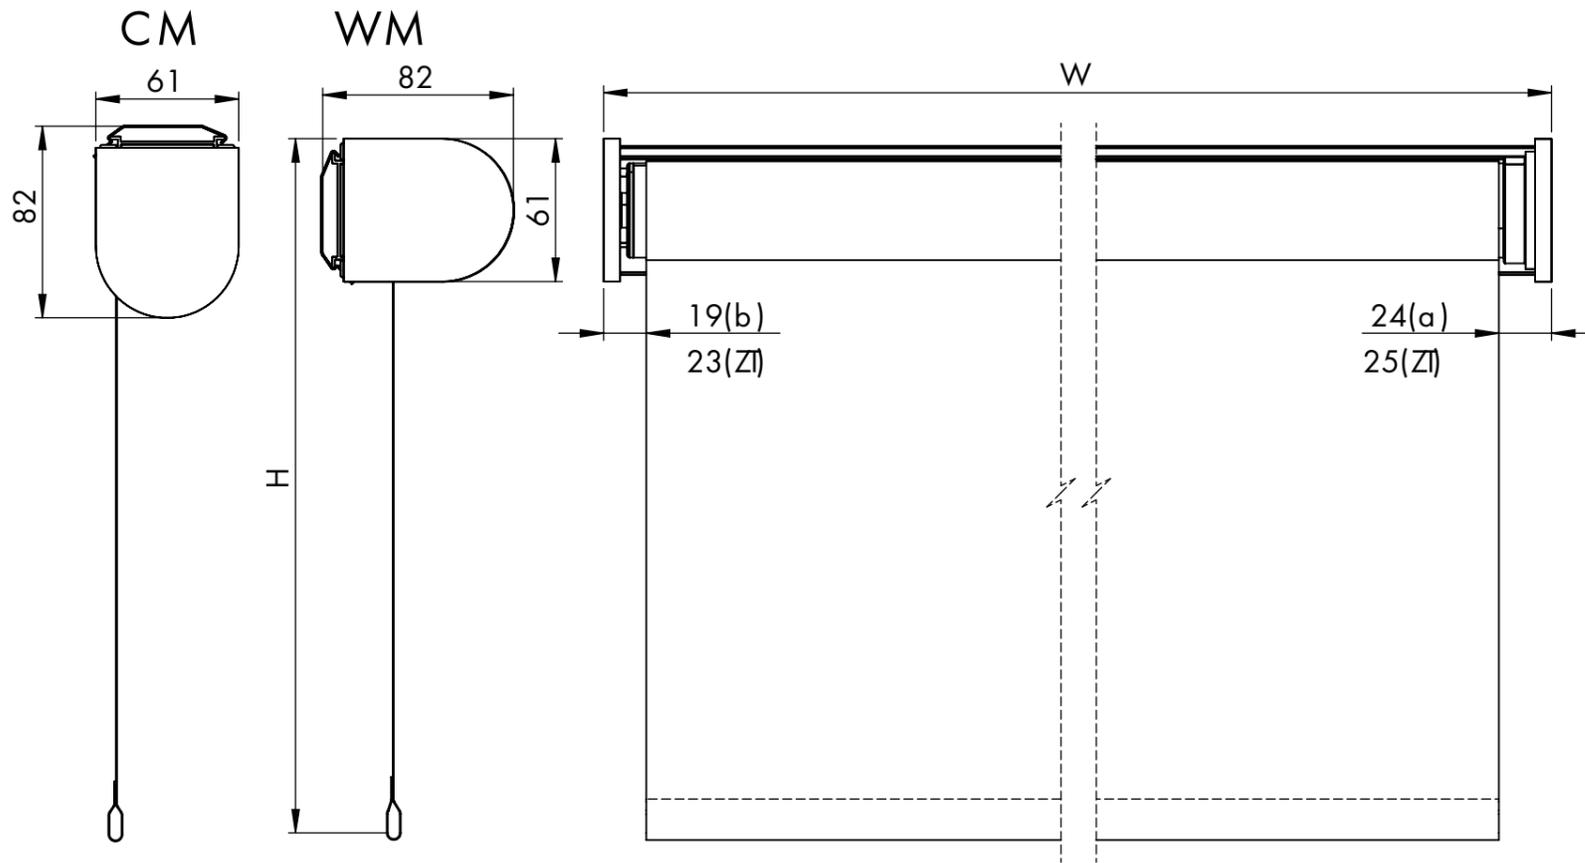

REN40

ACCU MOTOR SOMFY RTS

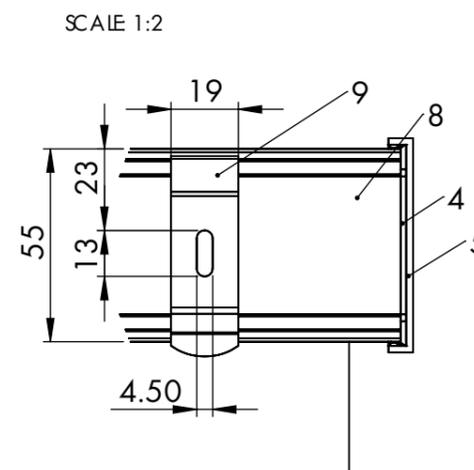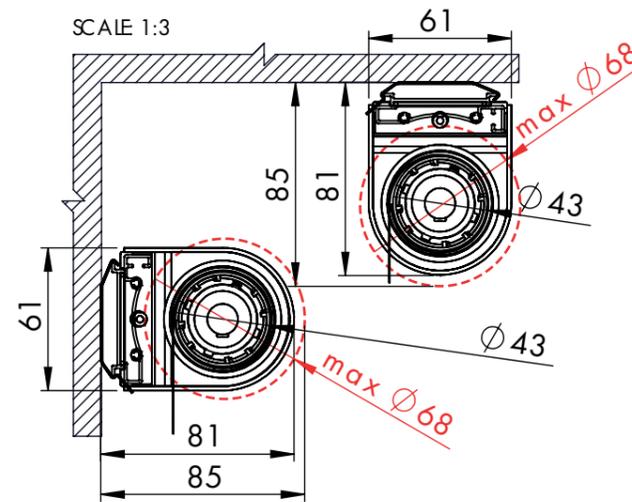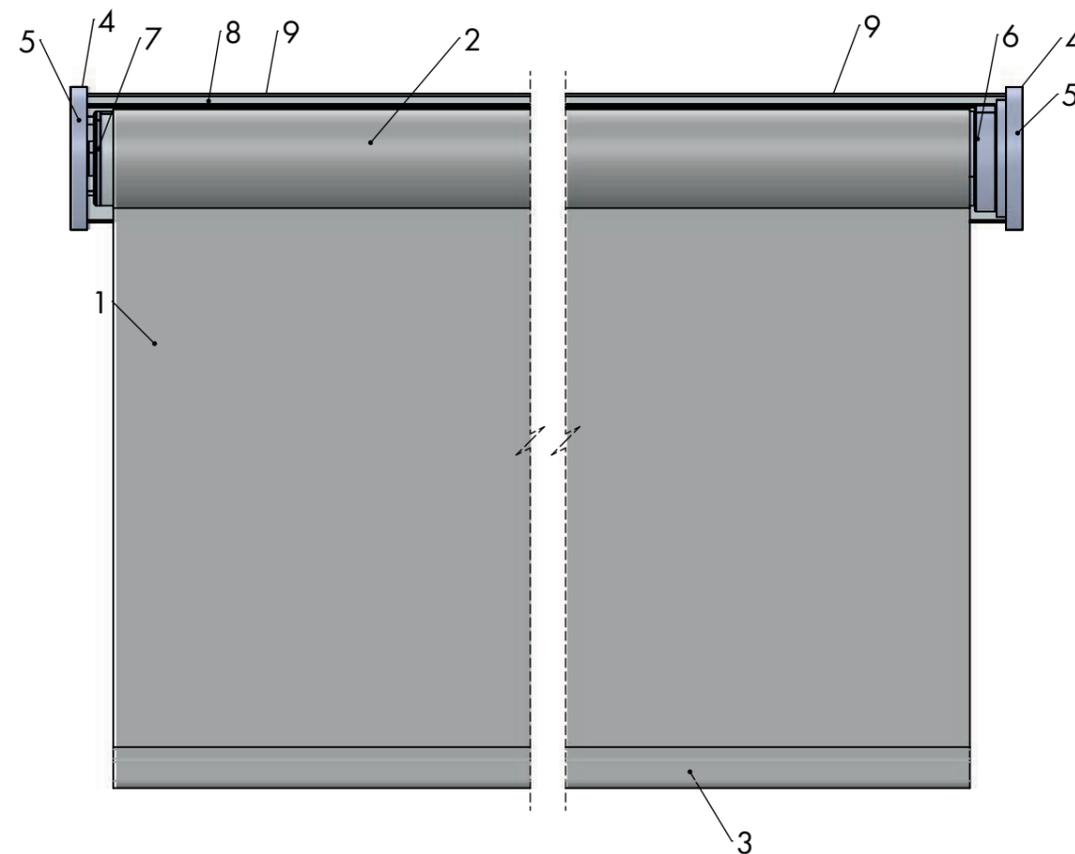



N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MP..	mounting profile
9	MC..	mounting clip

PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FN..




FN..

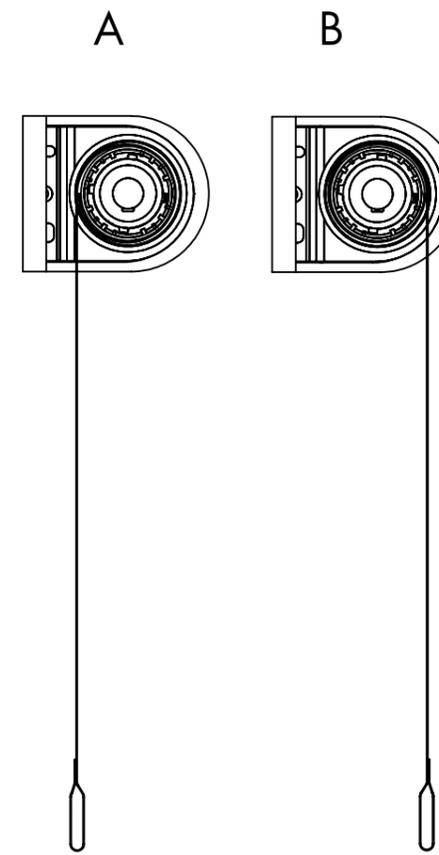
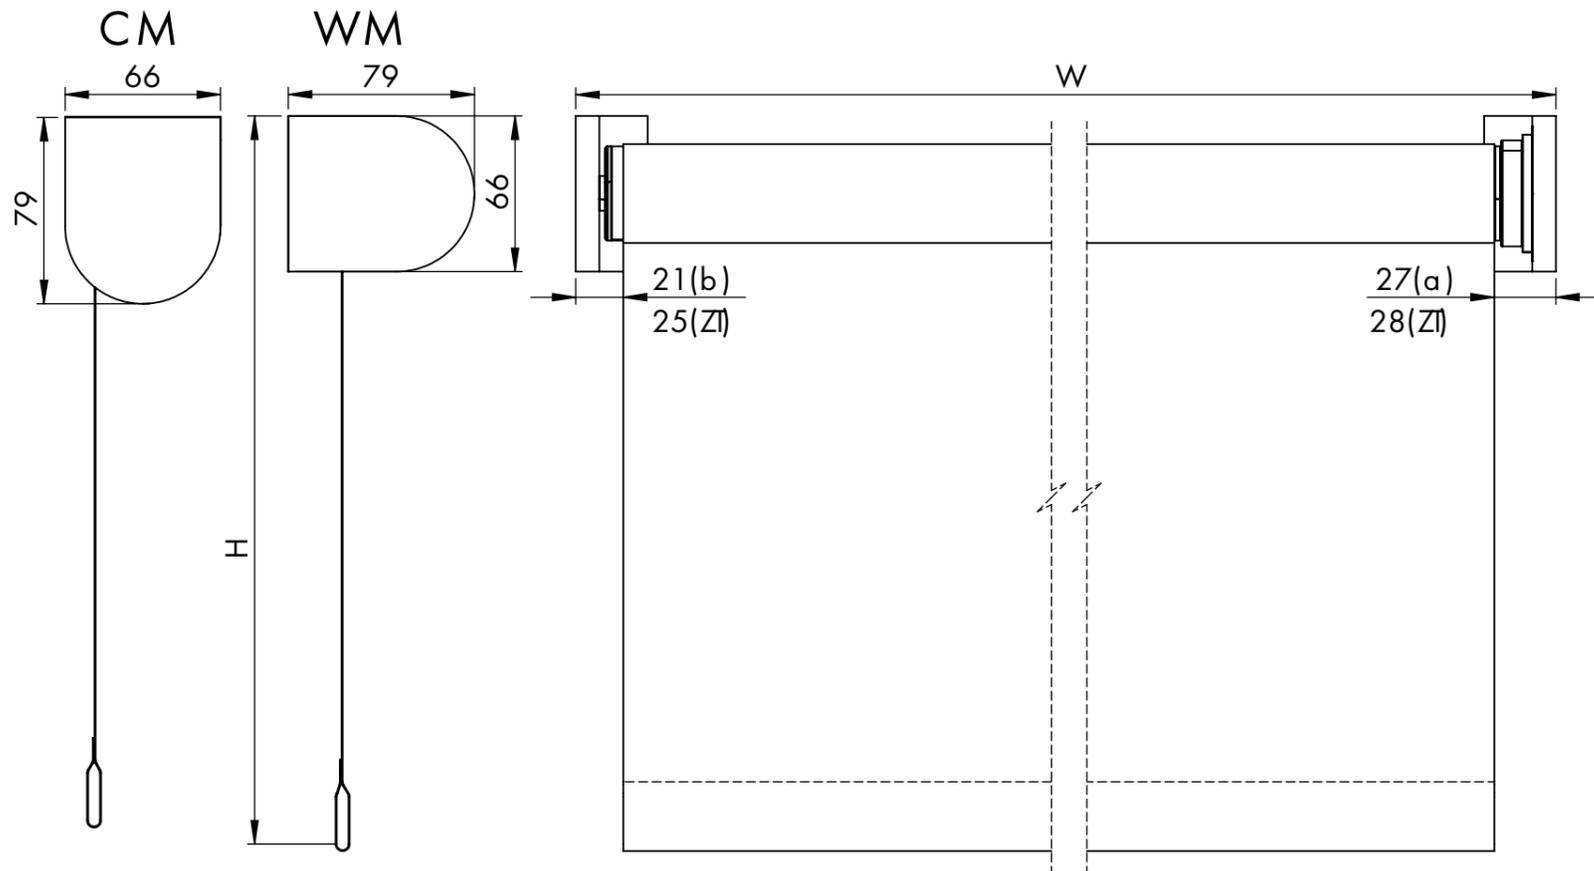


REN40

ACCU MOTOR SOMFY RTS

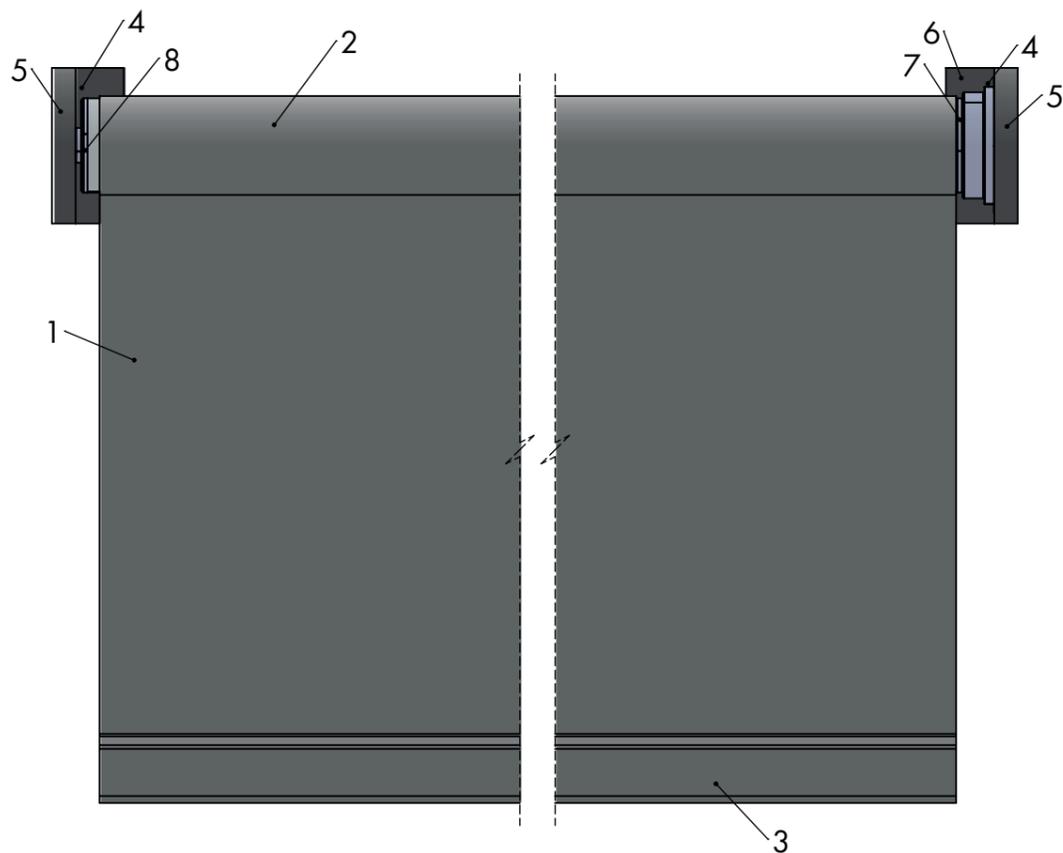

N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	SC..	screw cover
7	MOT..	motor+ adapter
8	EC..	end cup

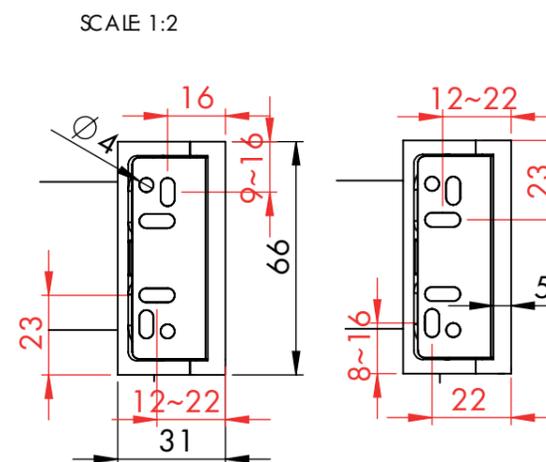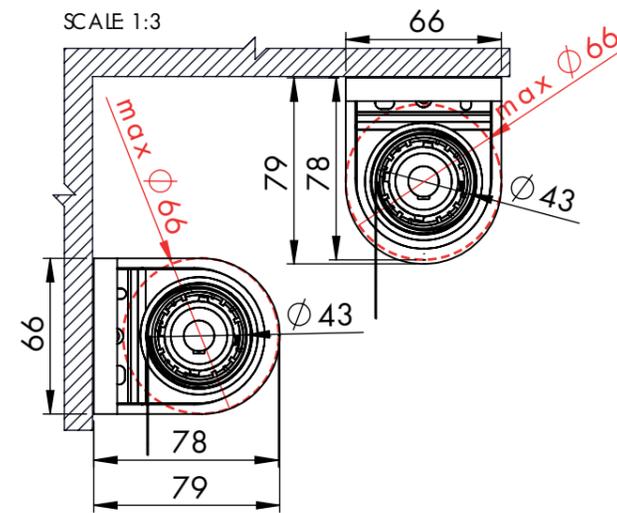




PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FN..





FINB

SCALE 1:5

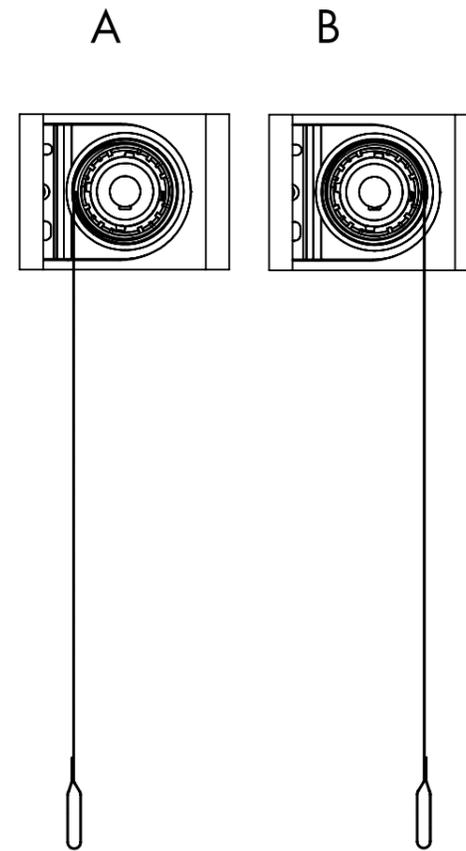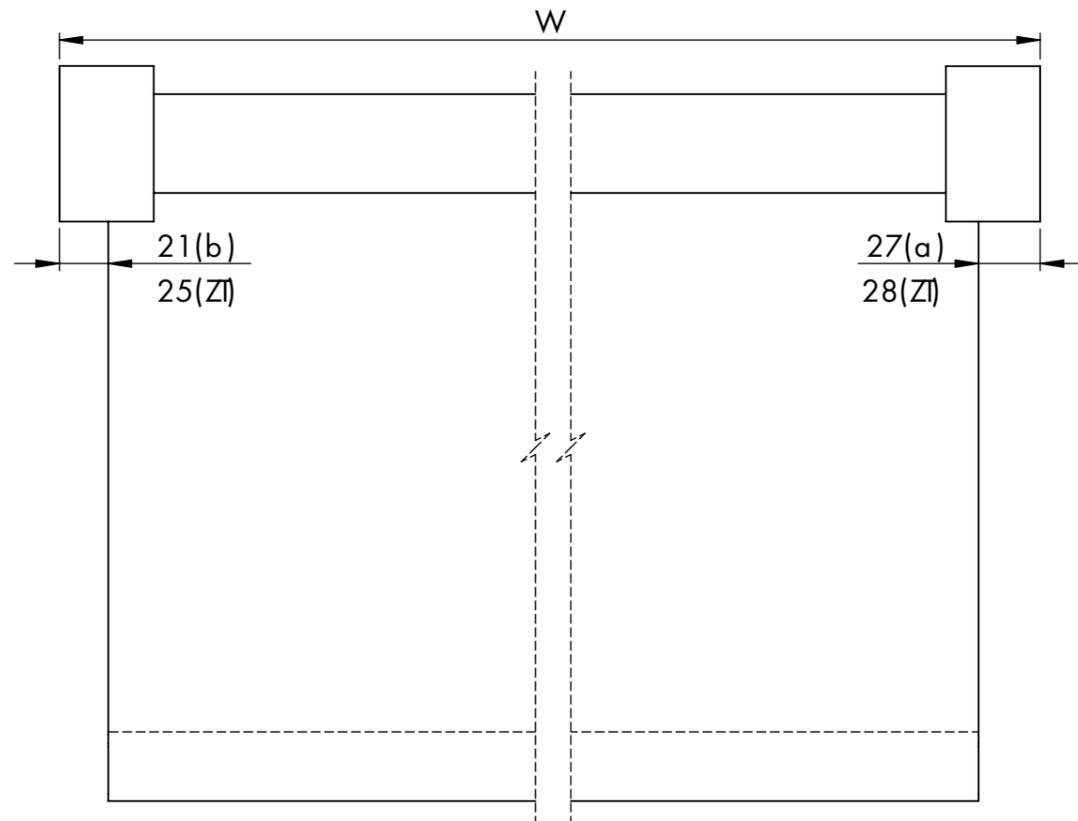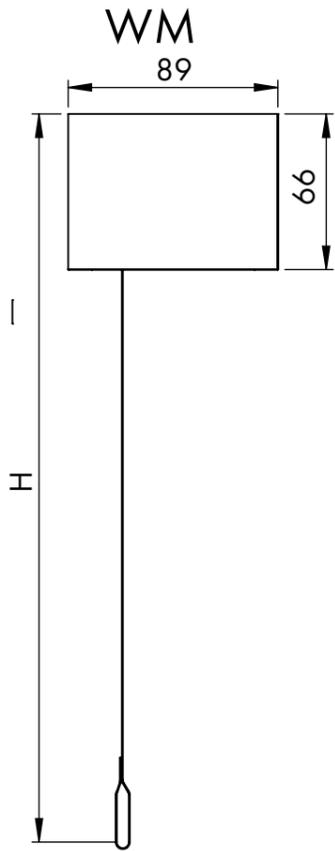


REN40


ACCUMOTOR SOMFY RTS

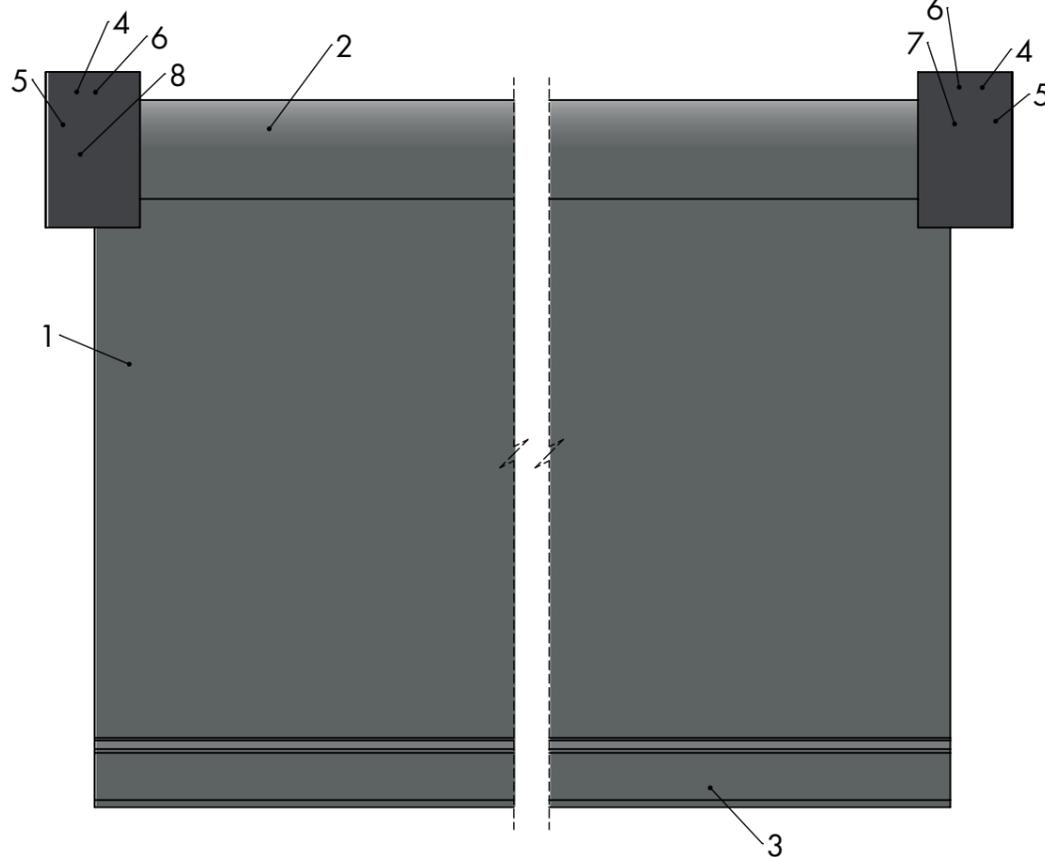

SCALE 1:3

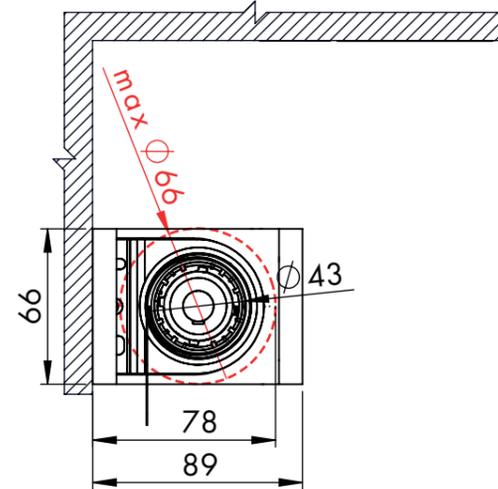

SCALE 1:2

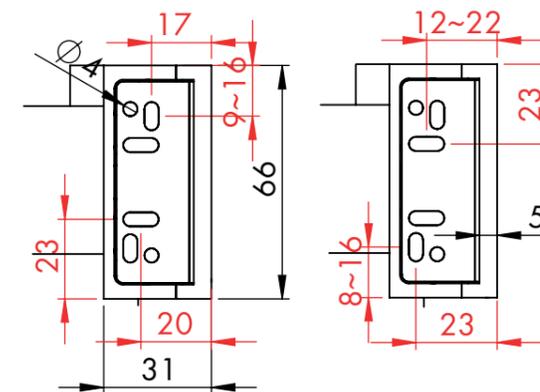

N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	SC..	screw cover
7	MOT..	motor+ adapter
8	EC..	end cup



PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall)
- Control Side L (left) or R (right)
- Bottom bar FN..






FN..

SCALE 1:5

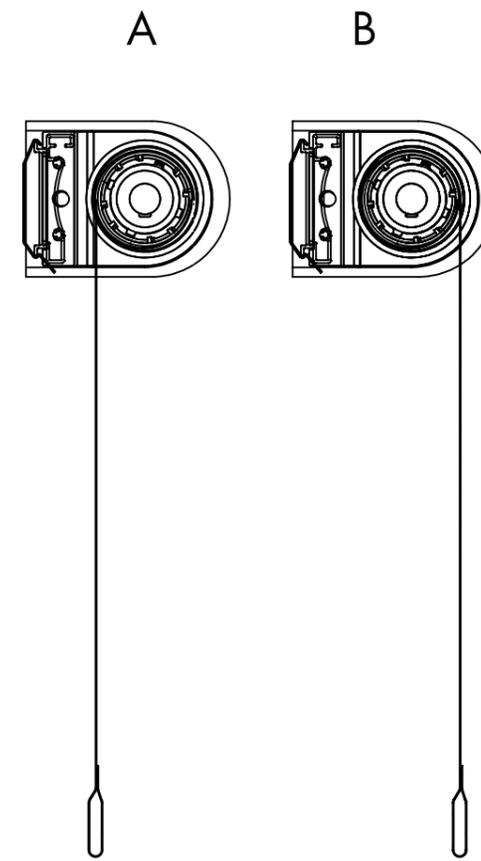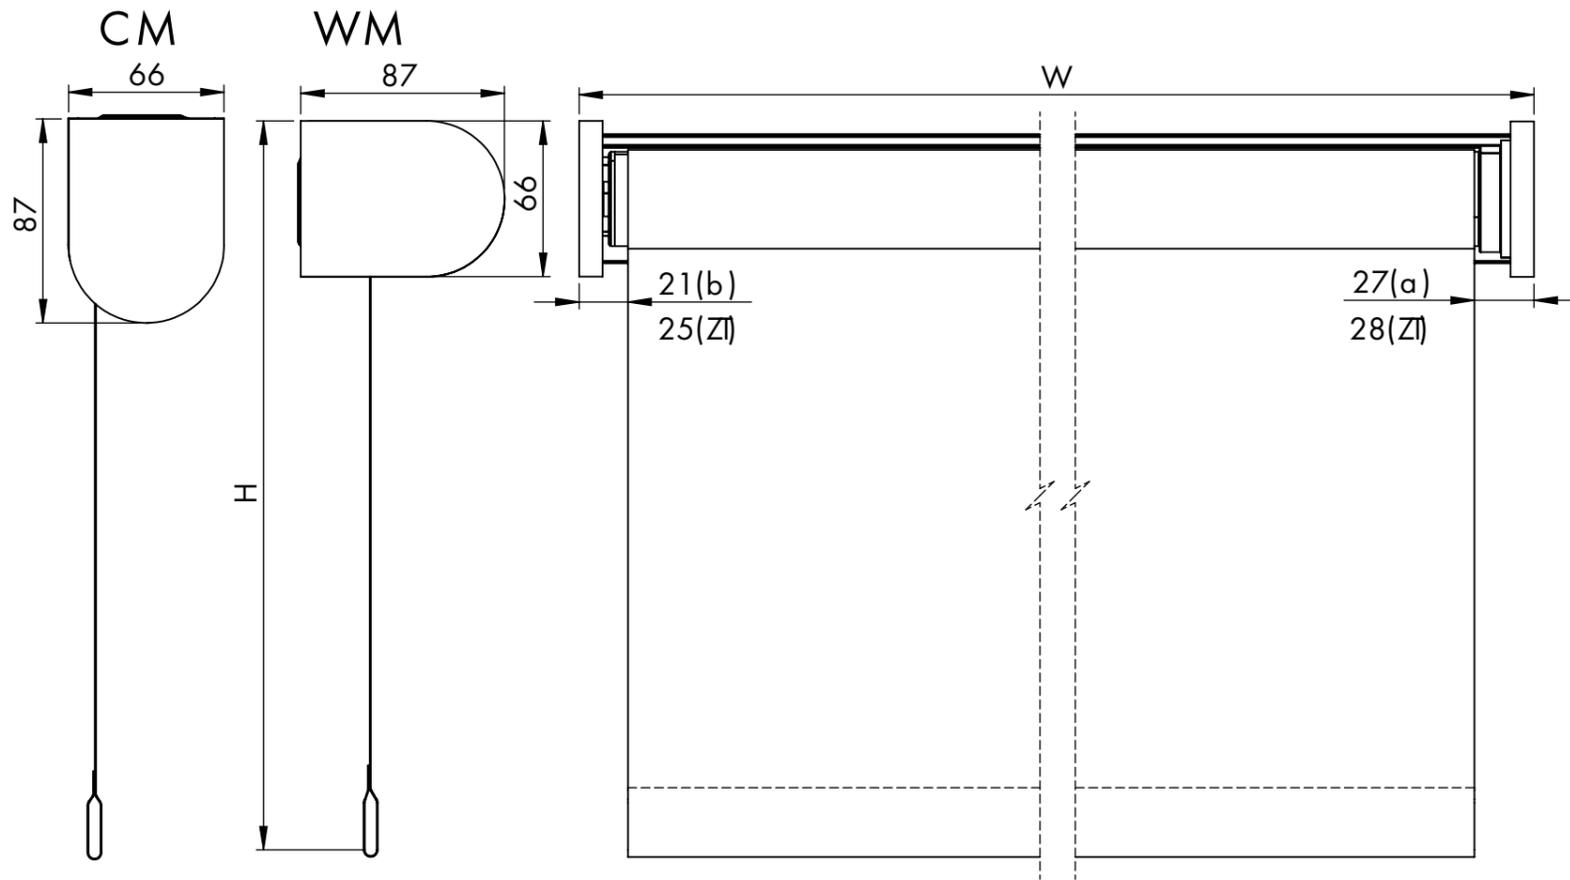

REN40

ACCU MOTOR SOMFY RTS

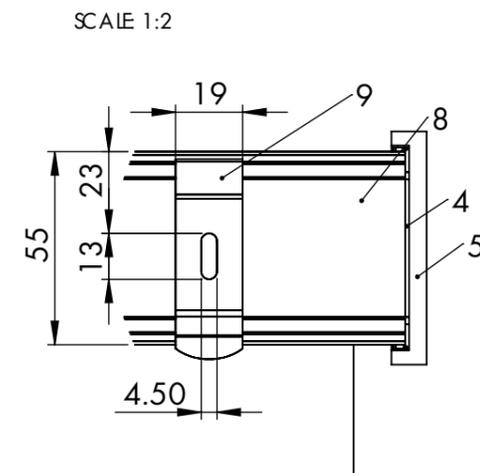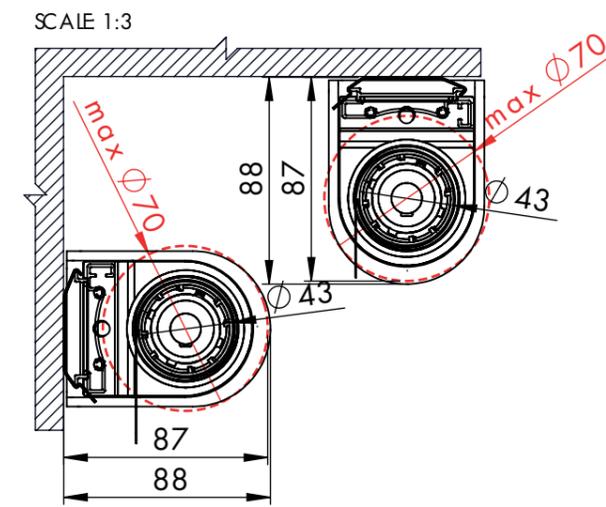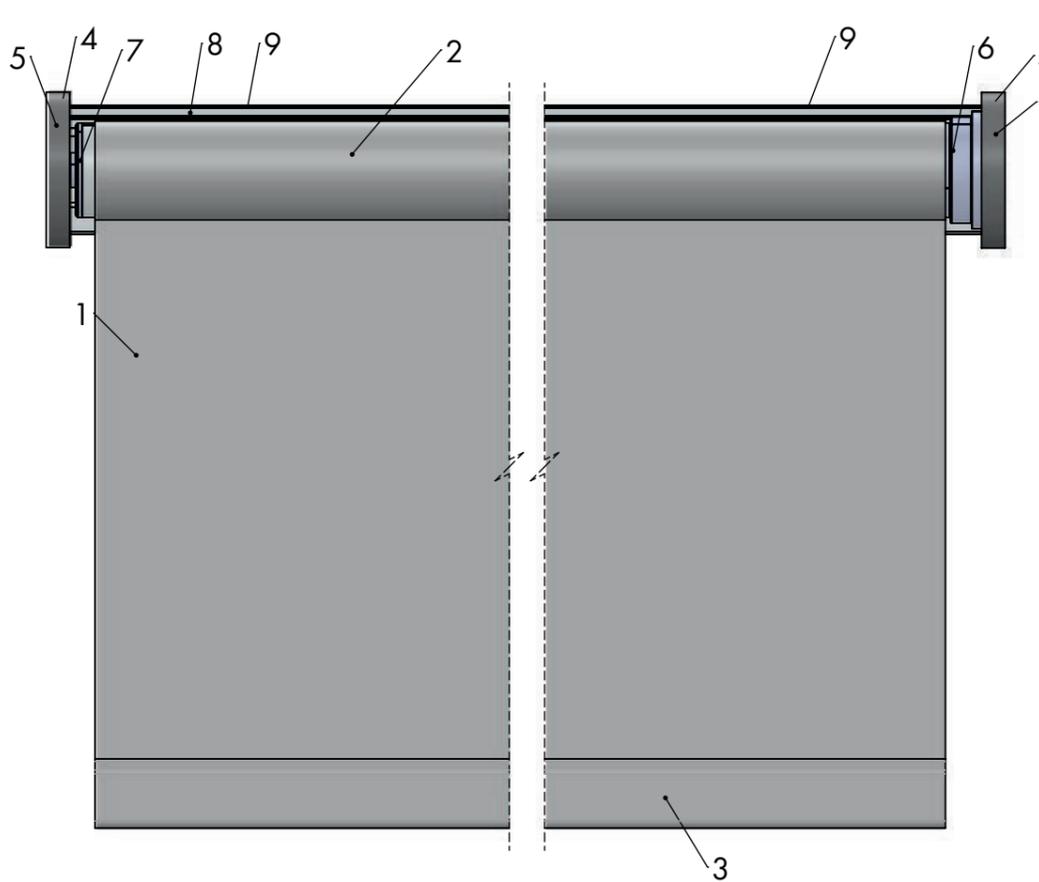



N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MP..	mounting profile
9	MC..	mounting clip

PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FN..






FN.B

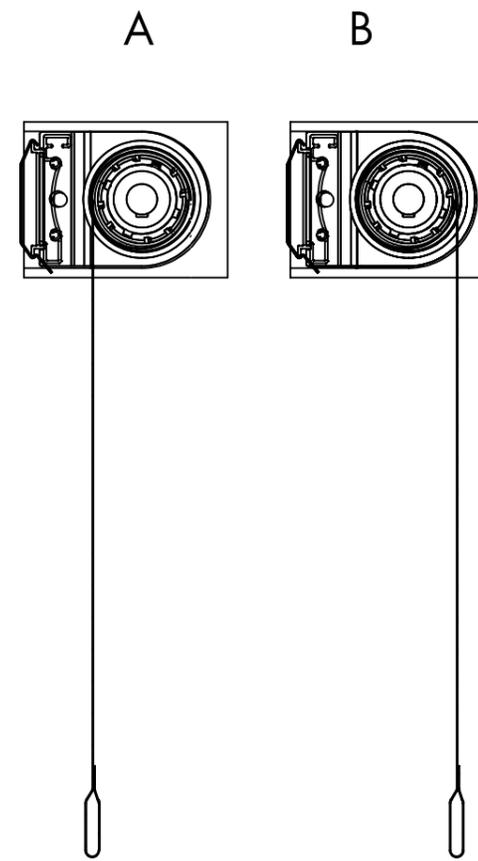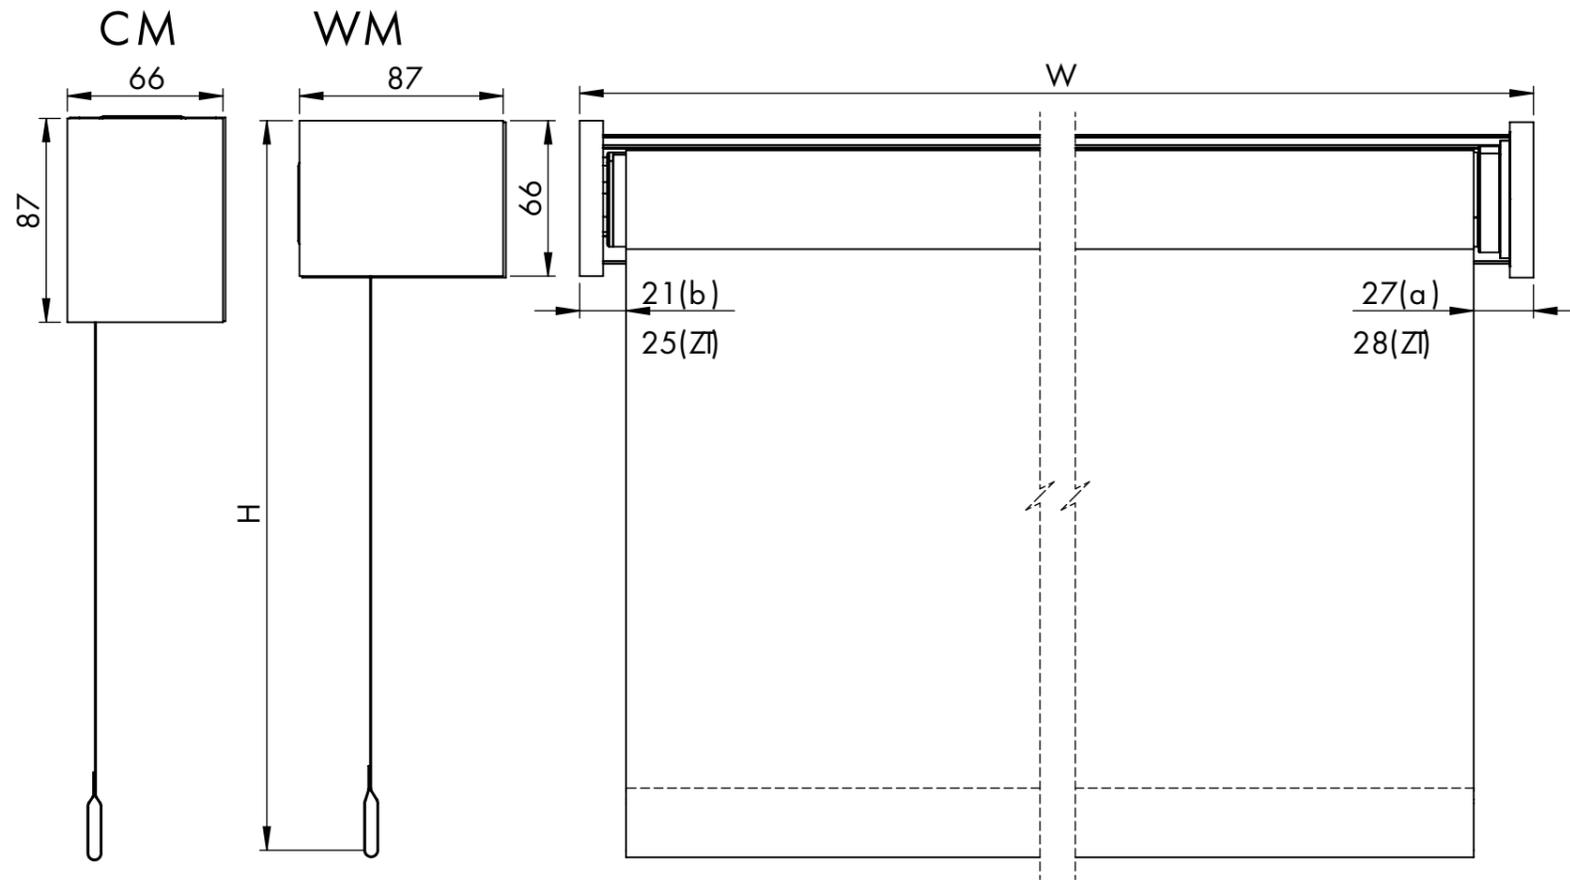

REN40

ACCU MOTOR SOMFY RTS

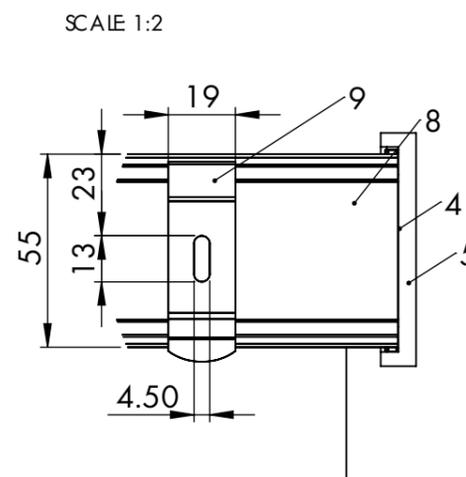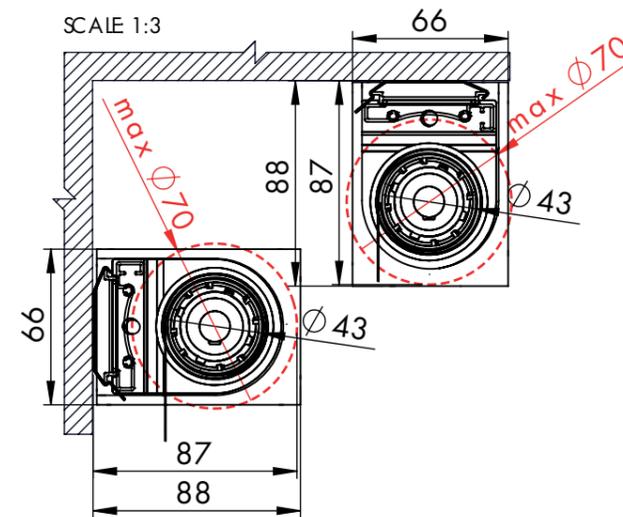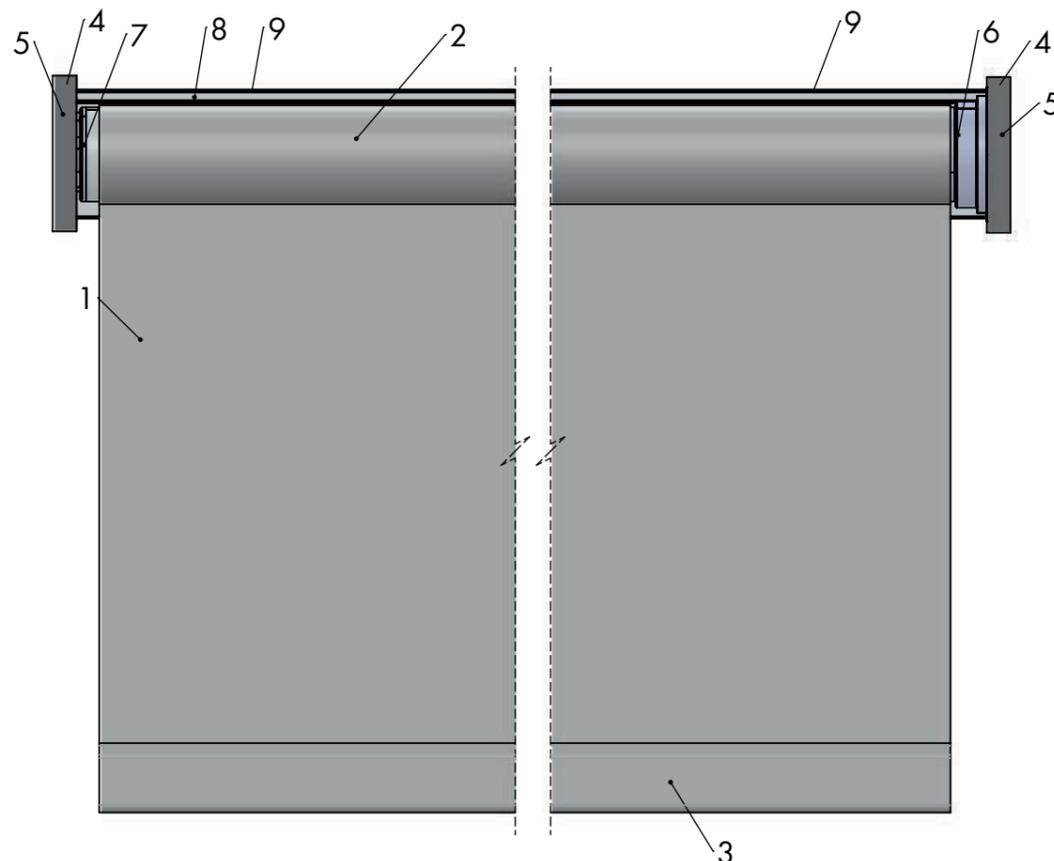

N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MP..	mounting profile
9	MC..	mounting clip




PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FN..






FN.B

SCALE 1:5

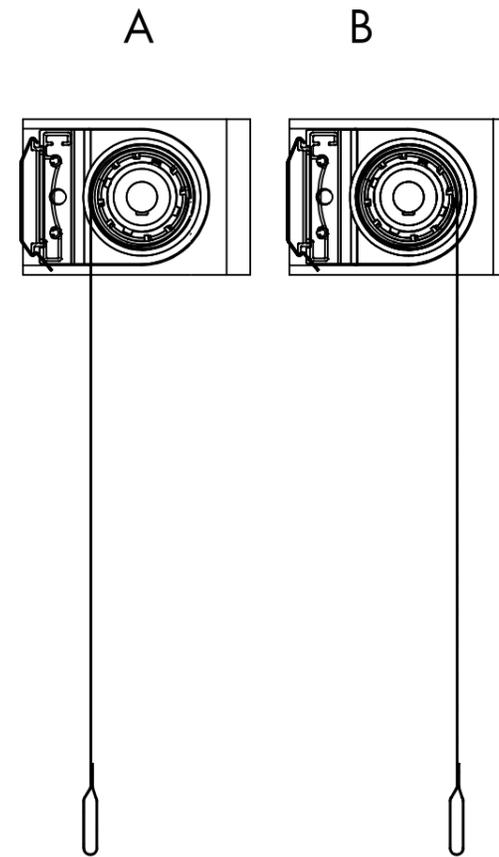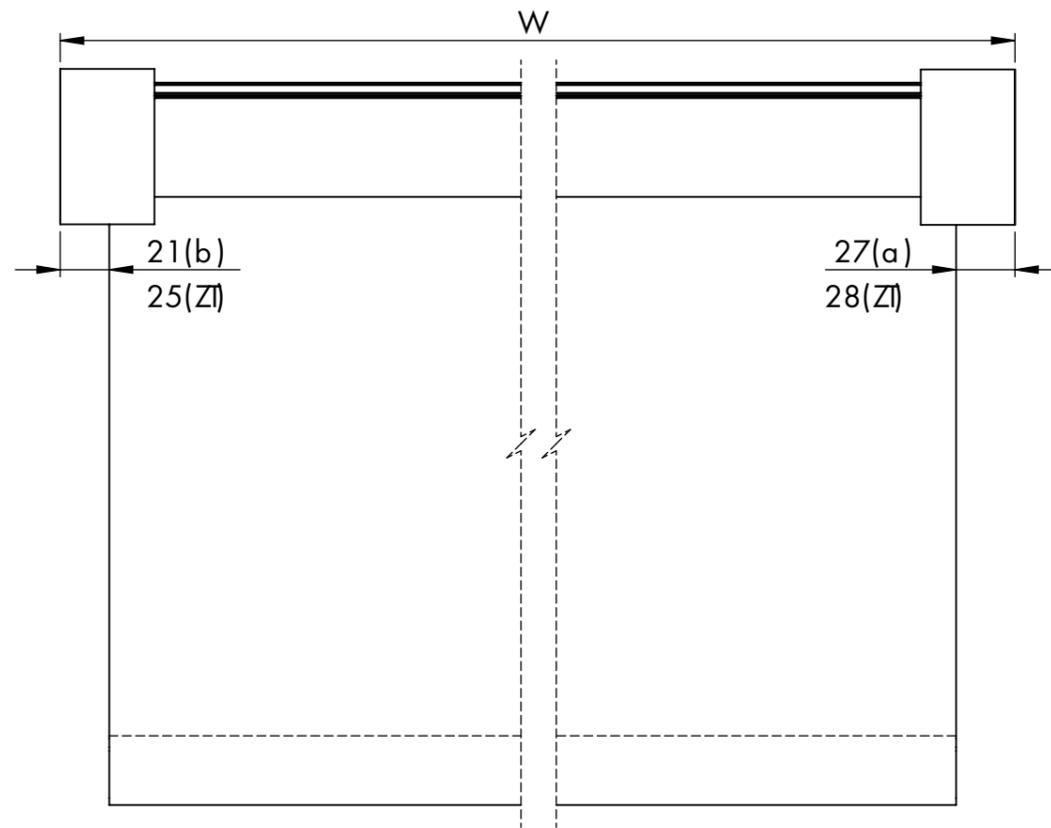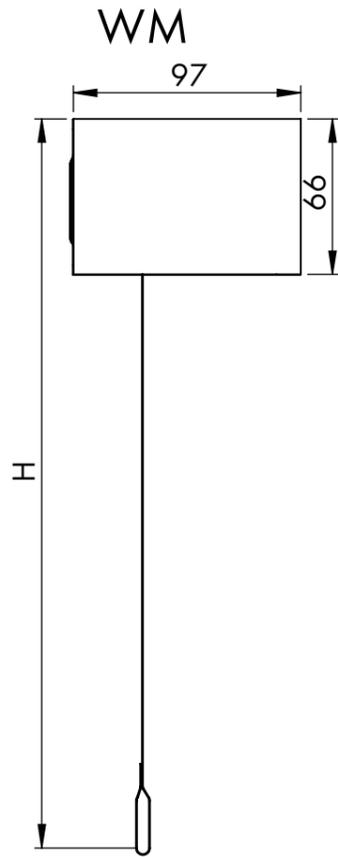

REN40

ACCU MOTOR SOMFY RTS

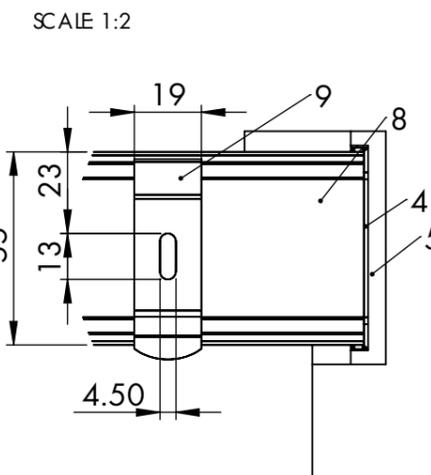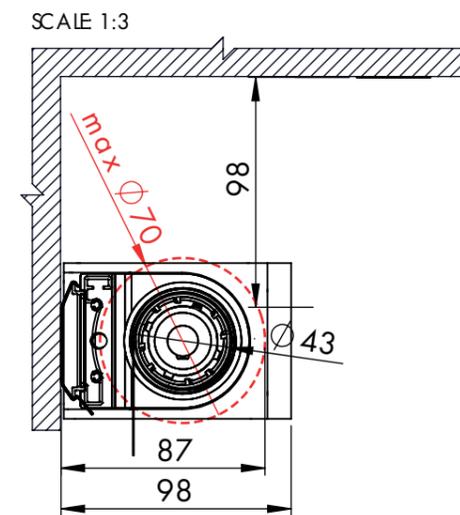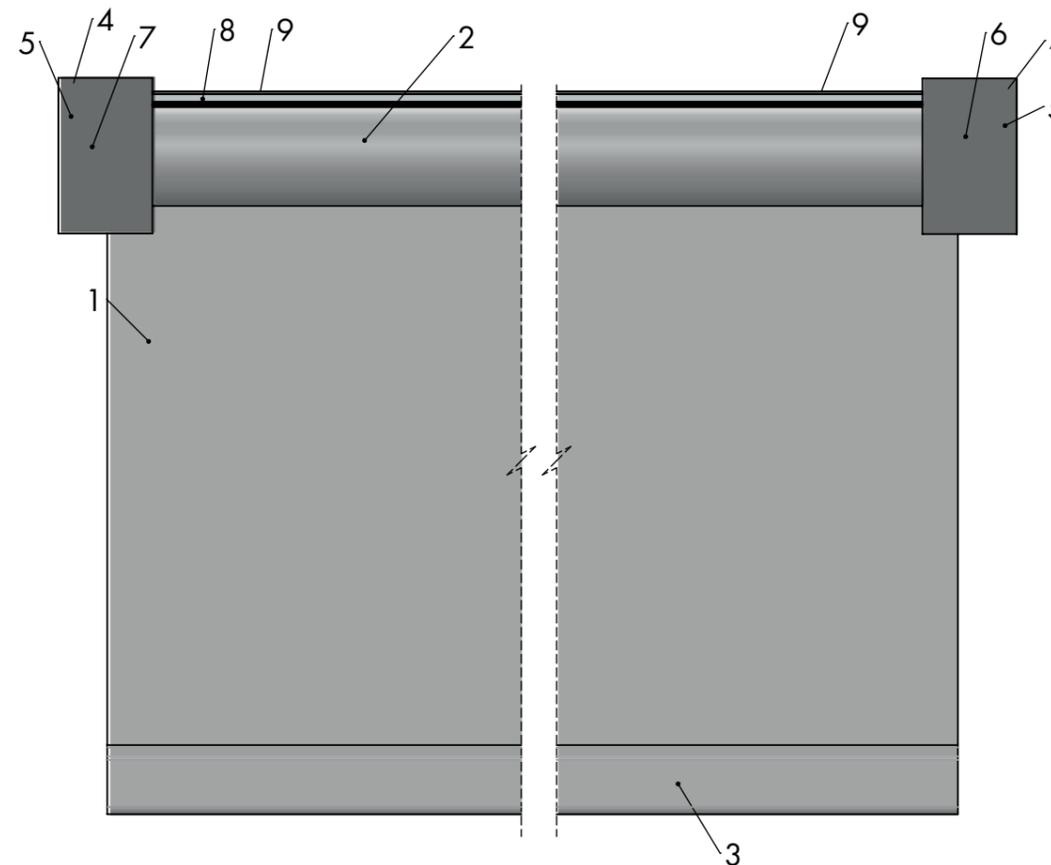

N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MP..	mounting profile
9	MC..	mounting clip



PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall)
- Control Side L (left) or R (right)
- Bottom bar FN..





FN B

SCALE 1:5

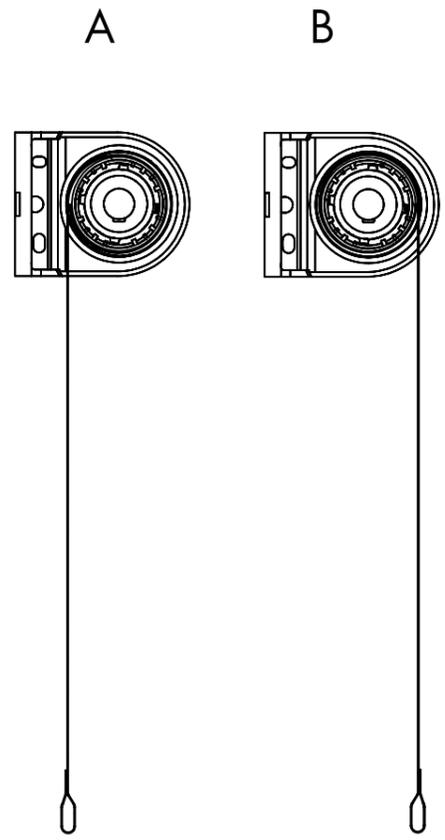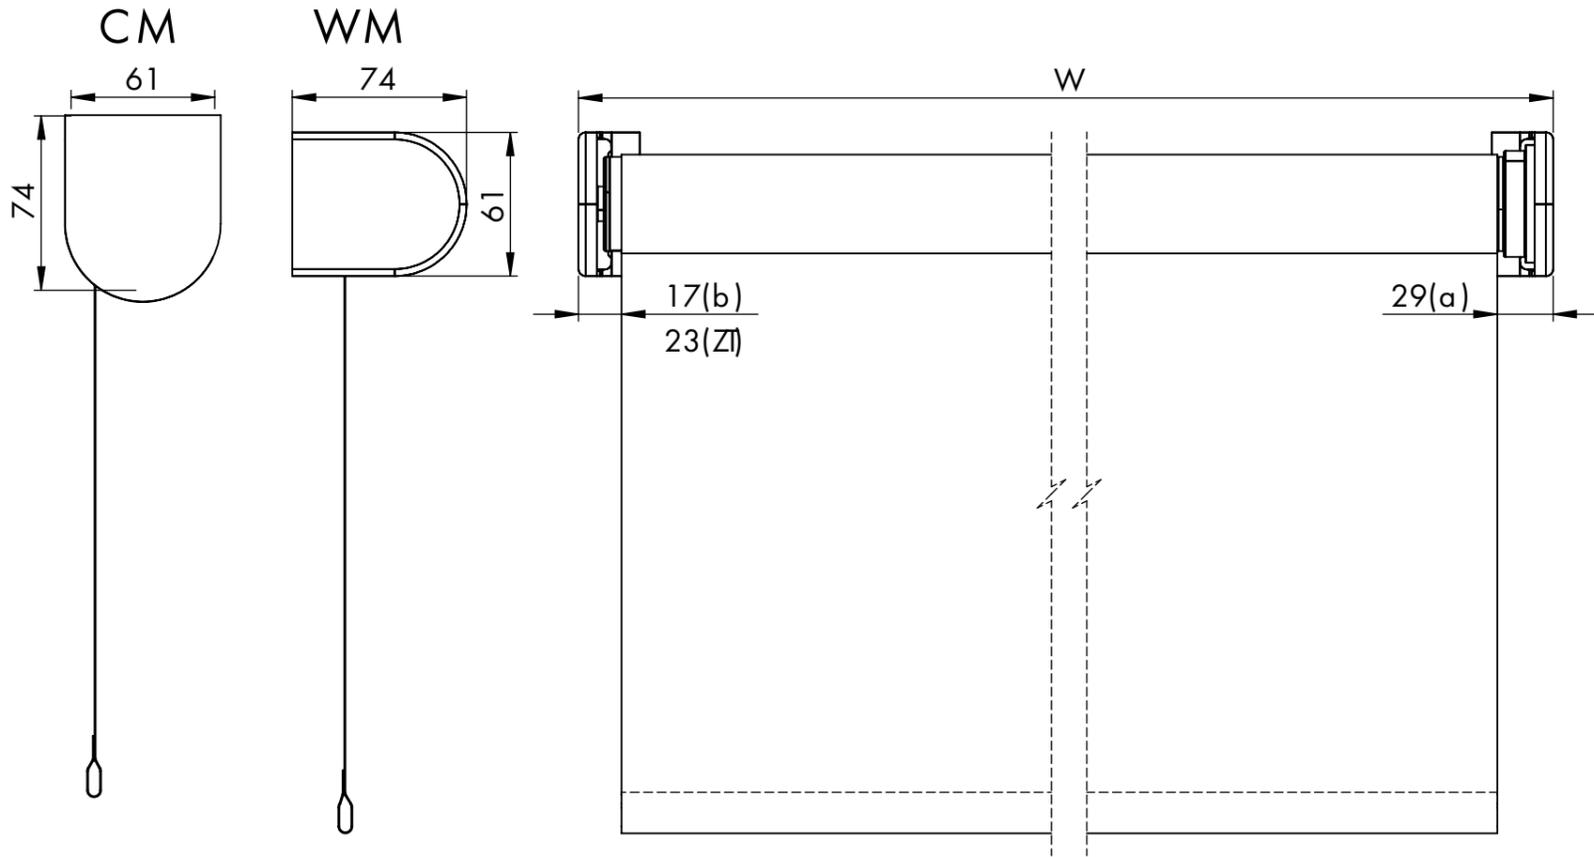

REN40

230V MOTOR SOMFY

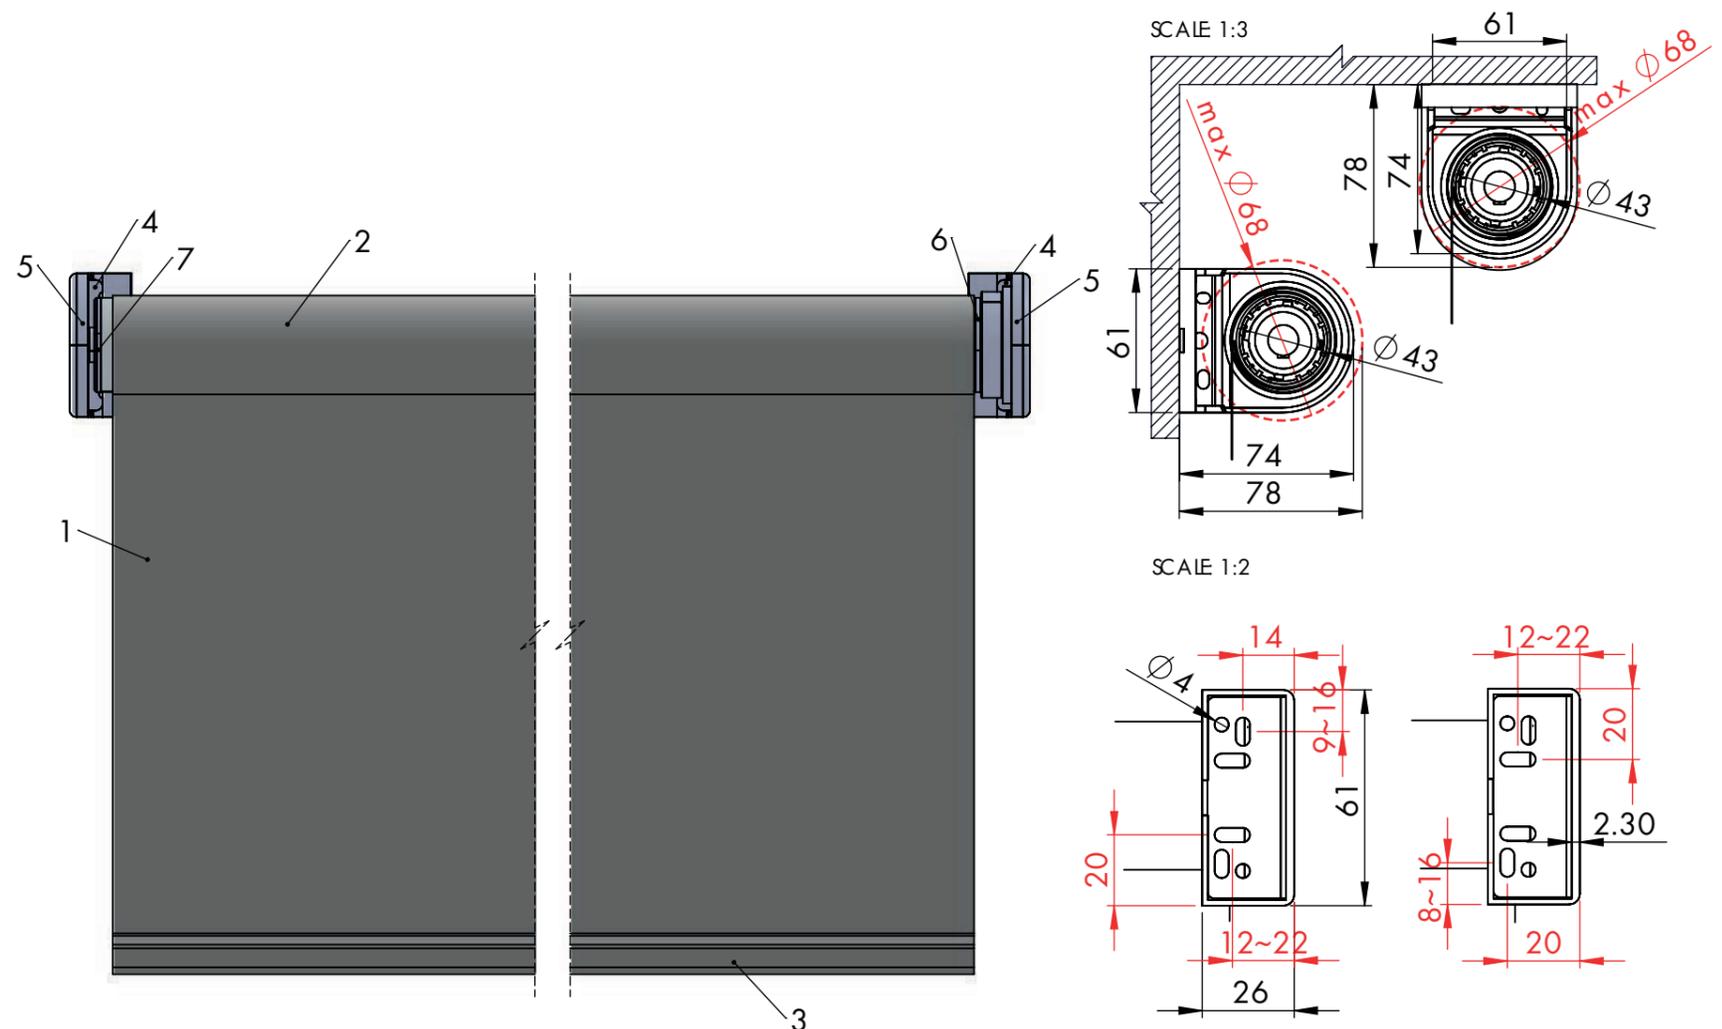

N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT.	motor + adapter
7	EC..	end cup



PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FN..






FN..

SCALE 1:5

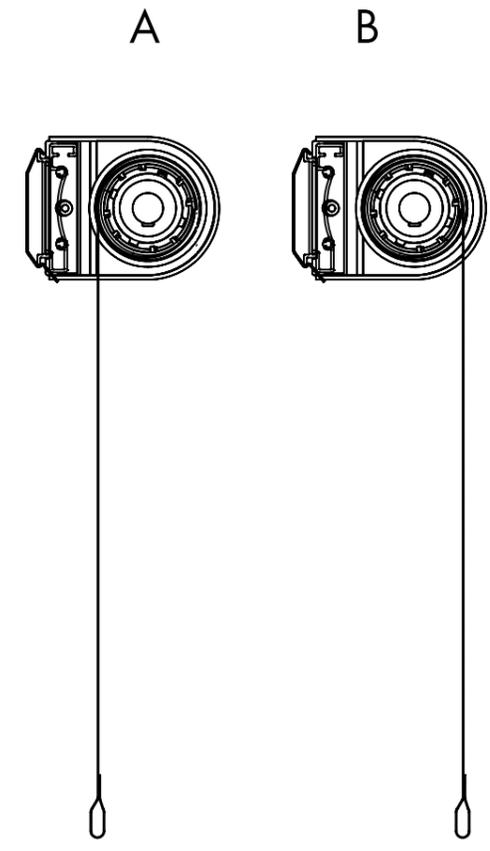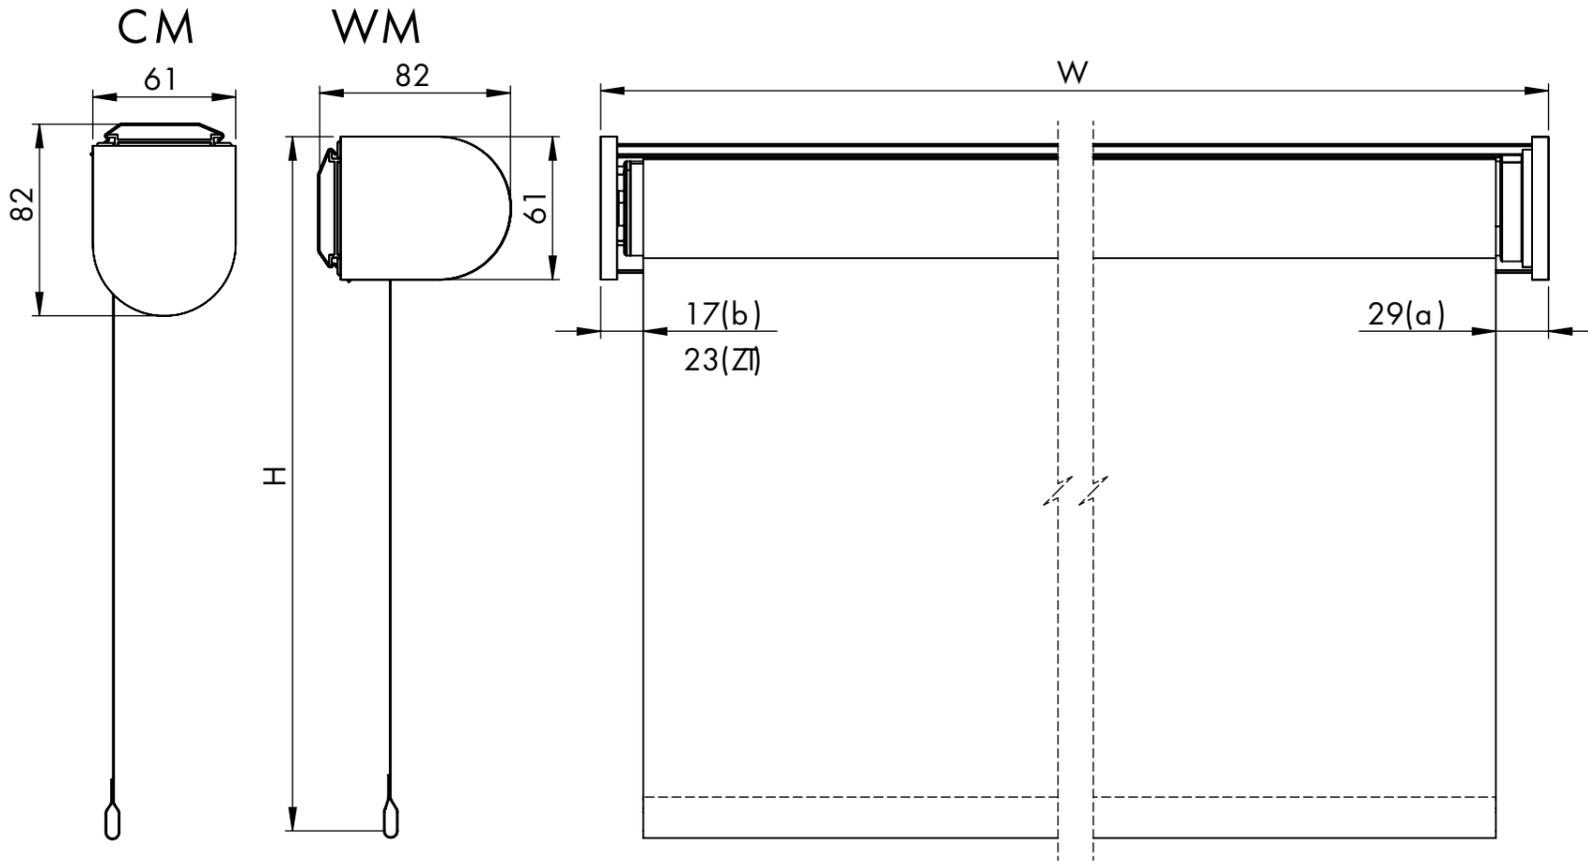

REN40

230V MOTOR SOMFY

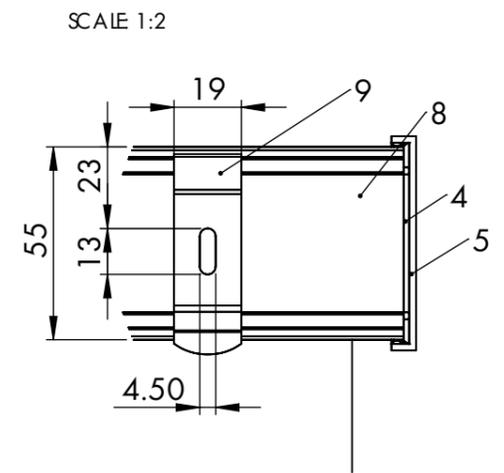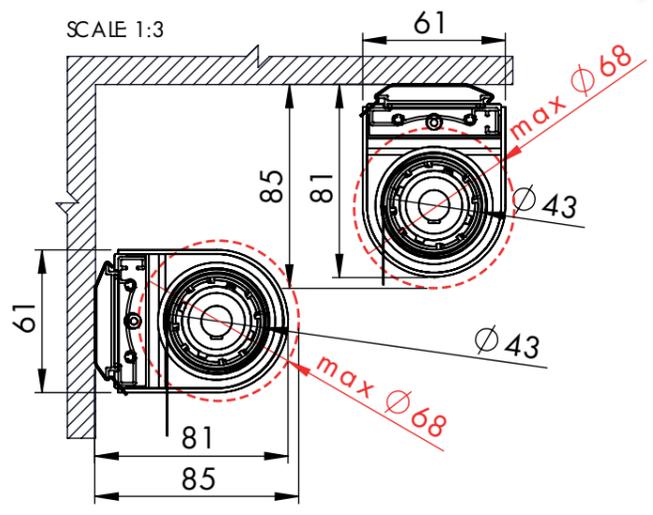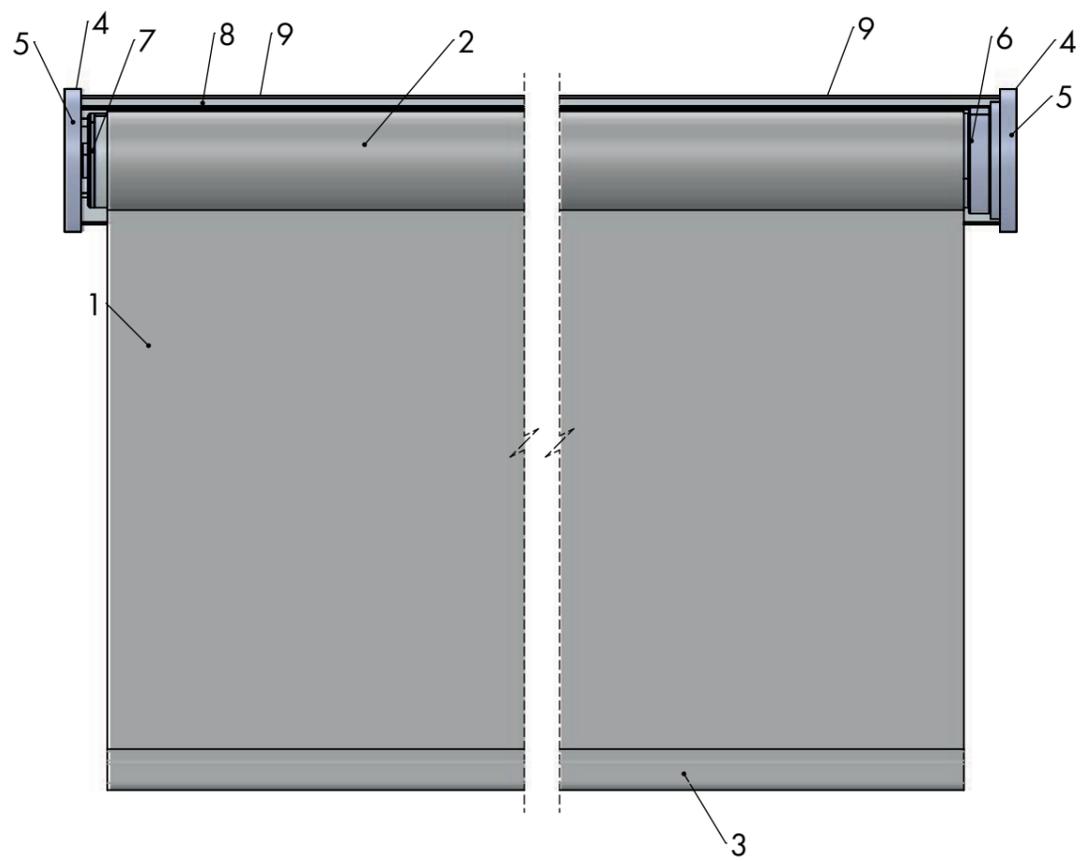

N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MP..	mounting profile
9	MC..	mounting clip



PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FN..







FN..

SCALE 1:5

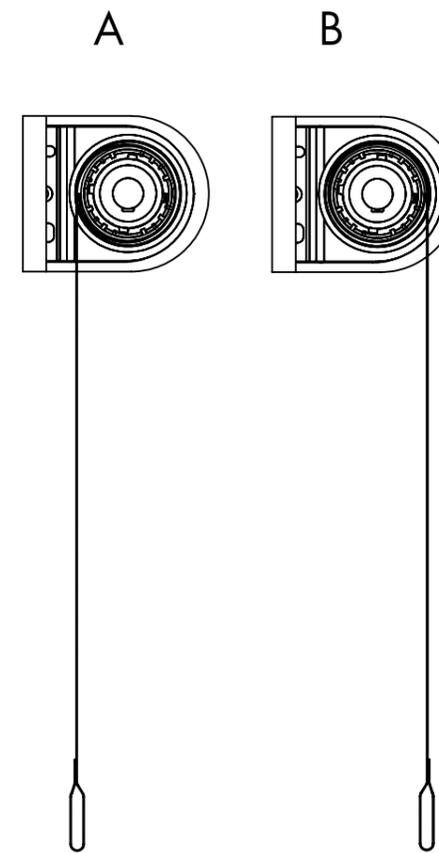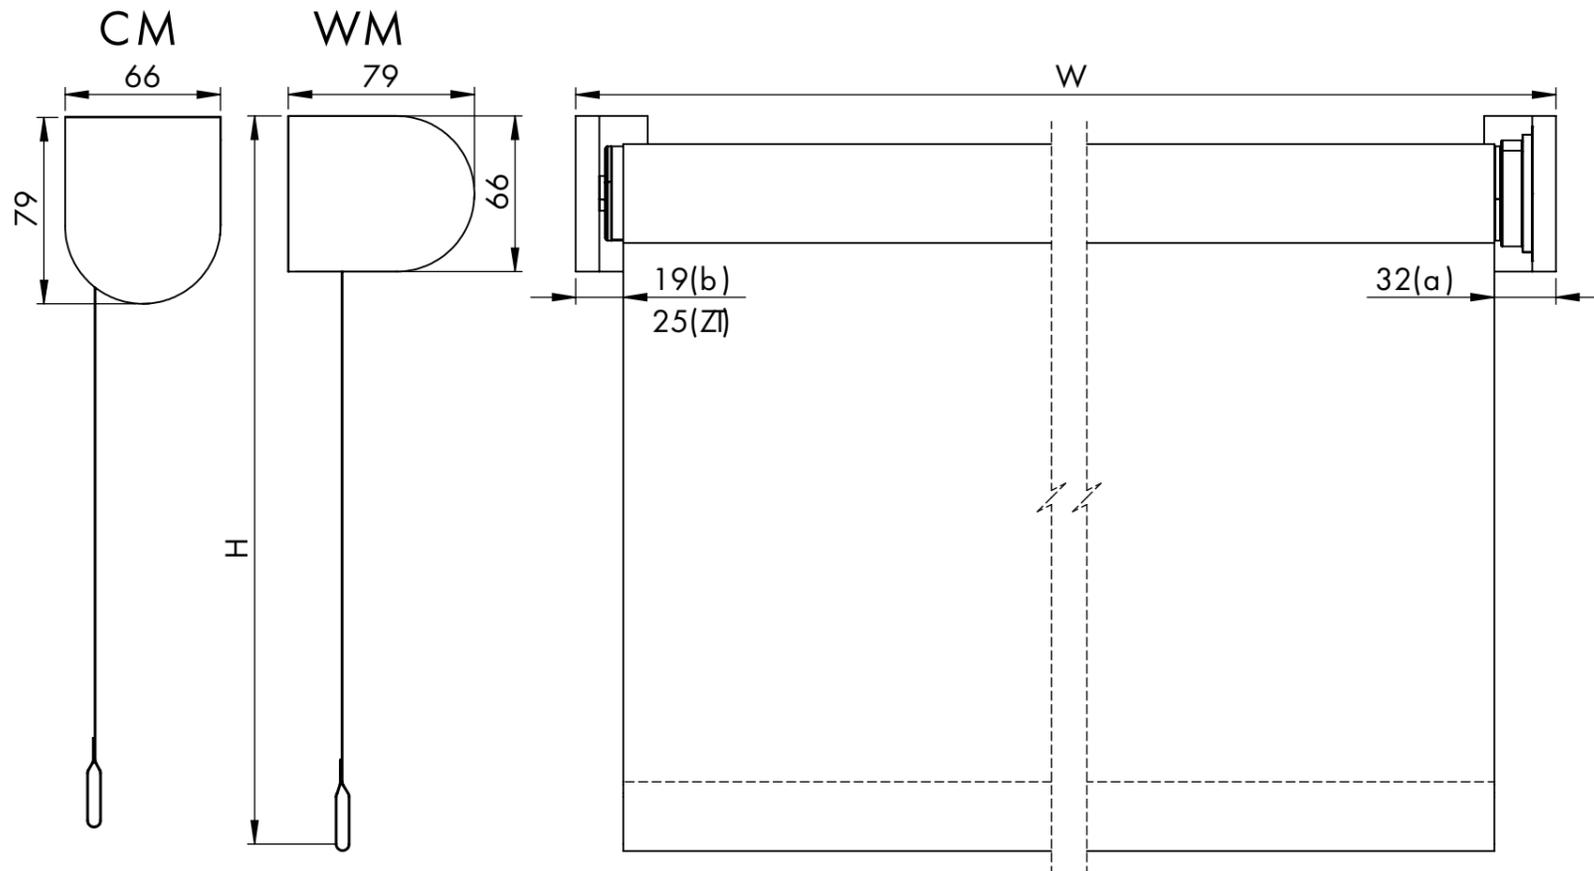

REN40

230V MOTOR SOMFY

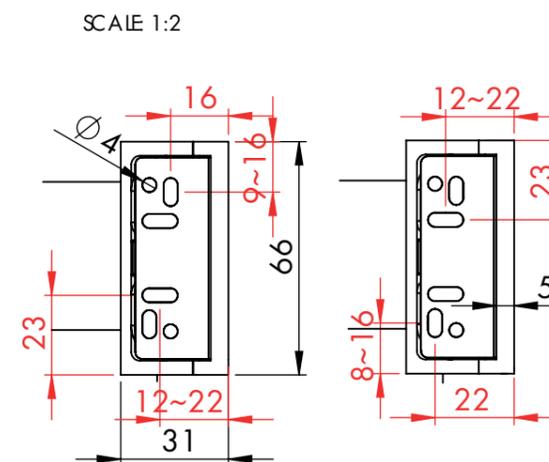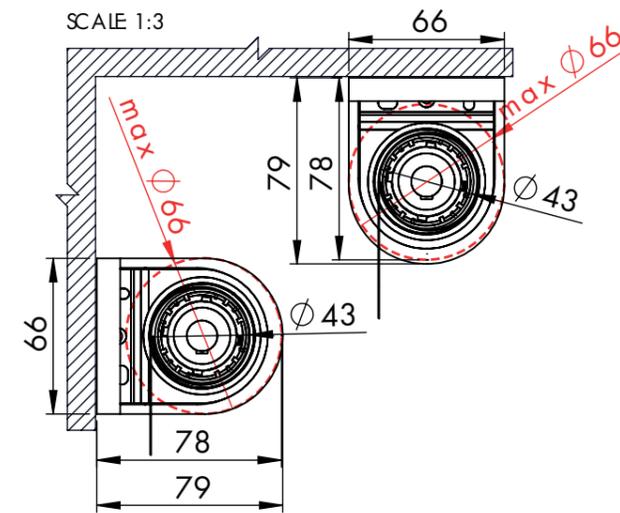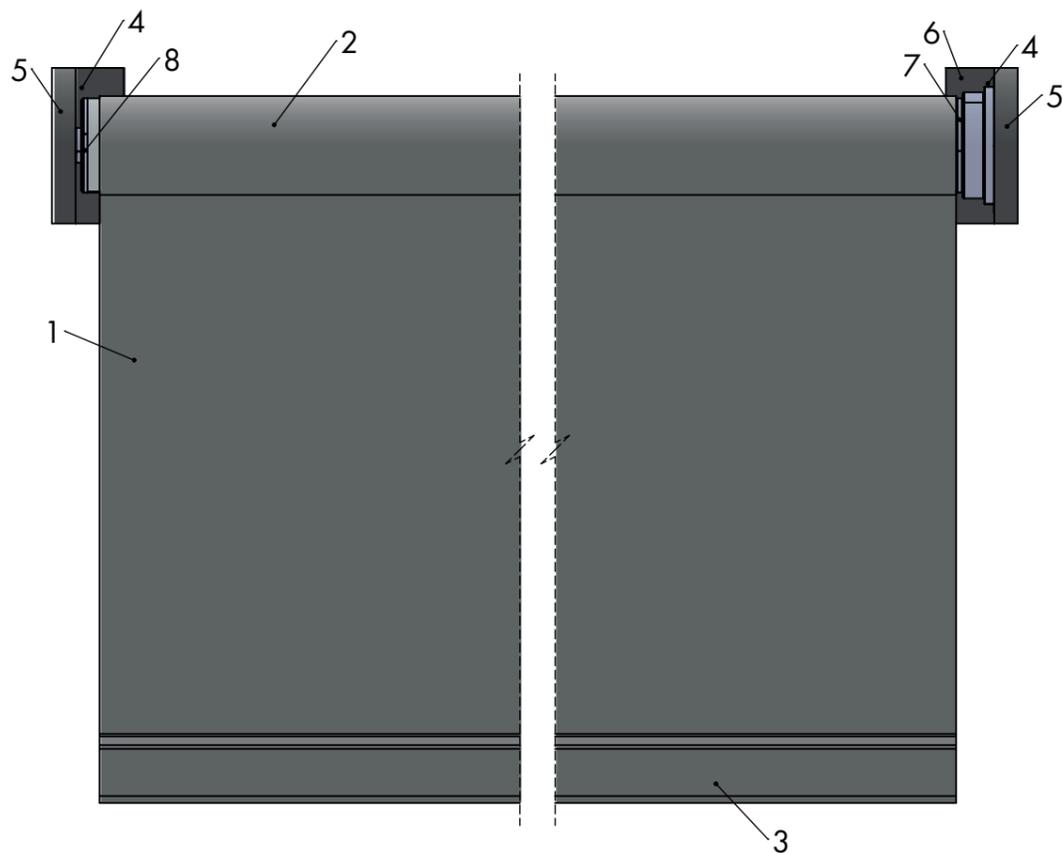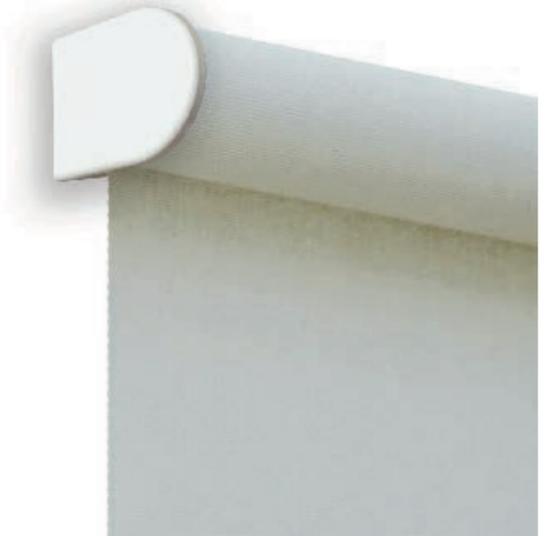



PARAMETERS

Width	W (in mm)
Height	H (in mm)
Fabric	F..
Unwinding	A or B (contra)
Mounting	WM (wall) or CM (ceiling)
Control Side	L (left) or R (right)
Bottom bar	FN..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	SC..	screw cover
7	MOT..	motor+ adapter
8	EC..	end cup






FN..B

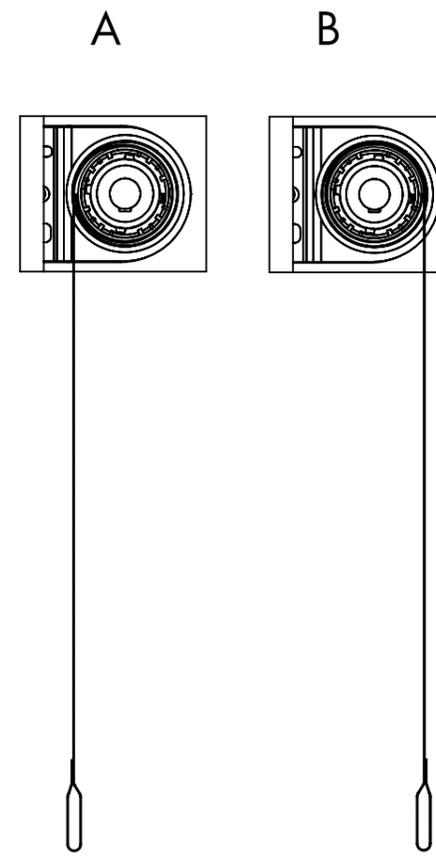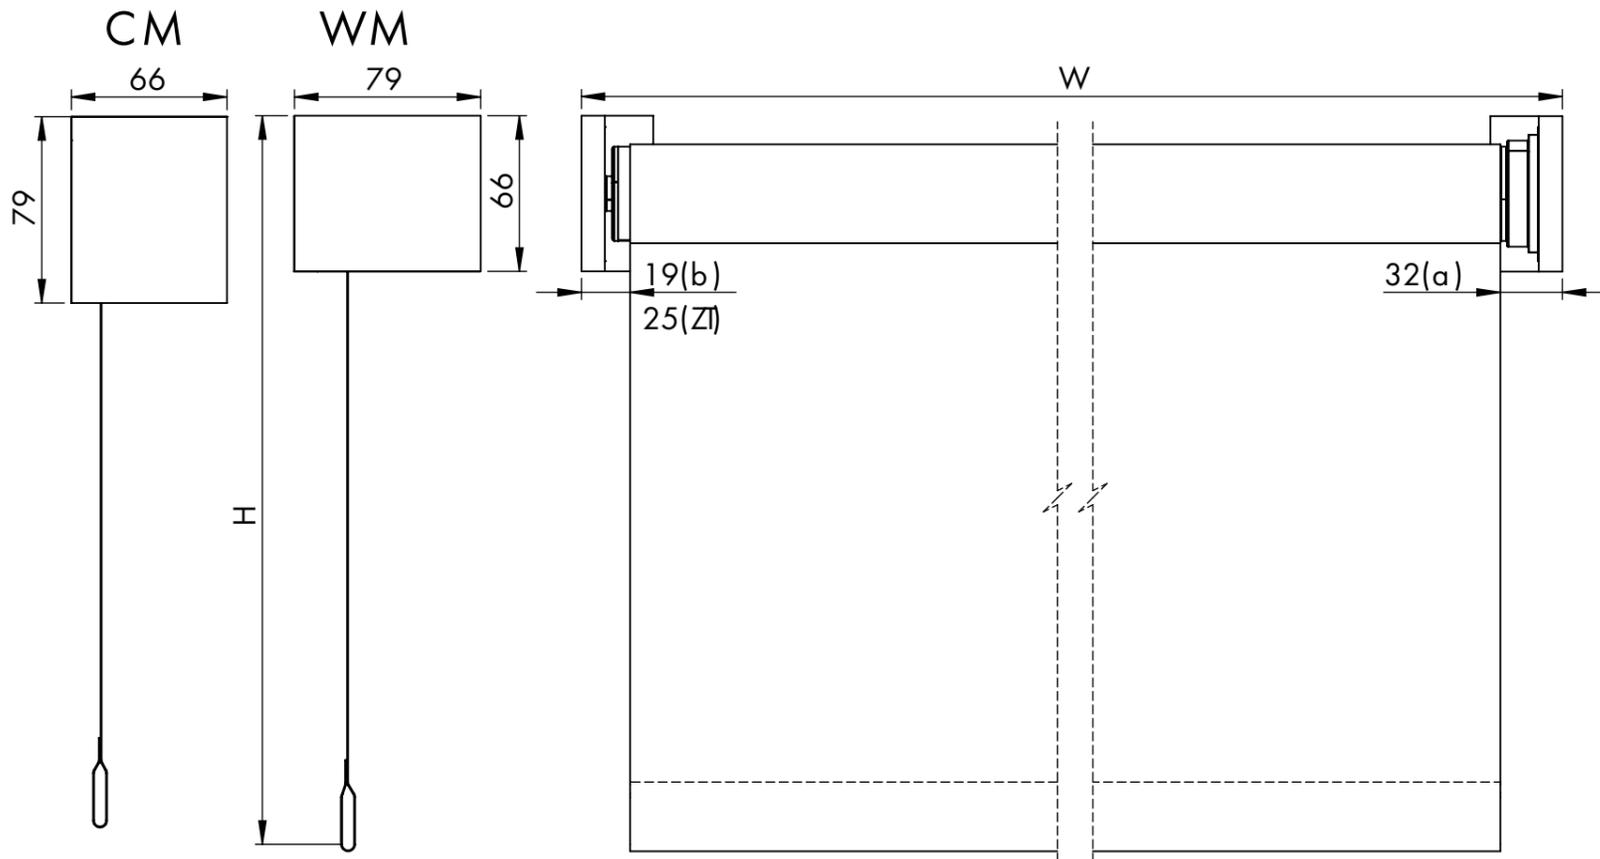

REN40

230V MOTOR SOMFY

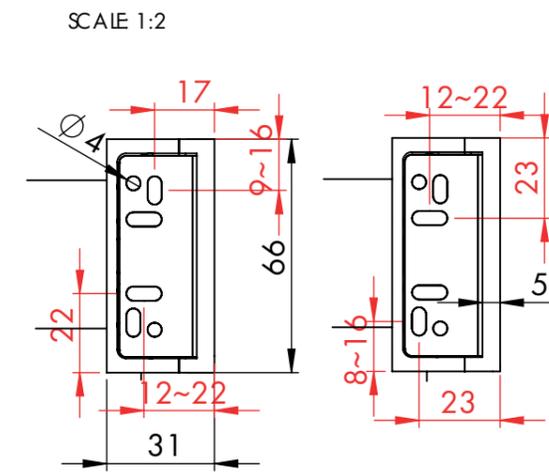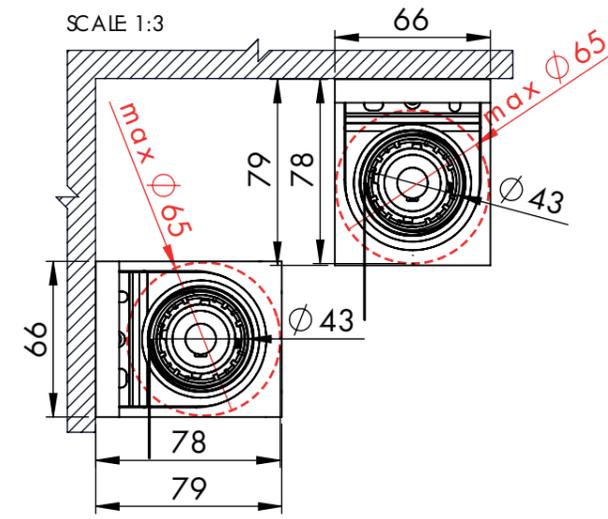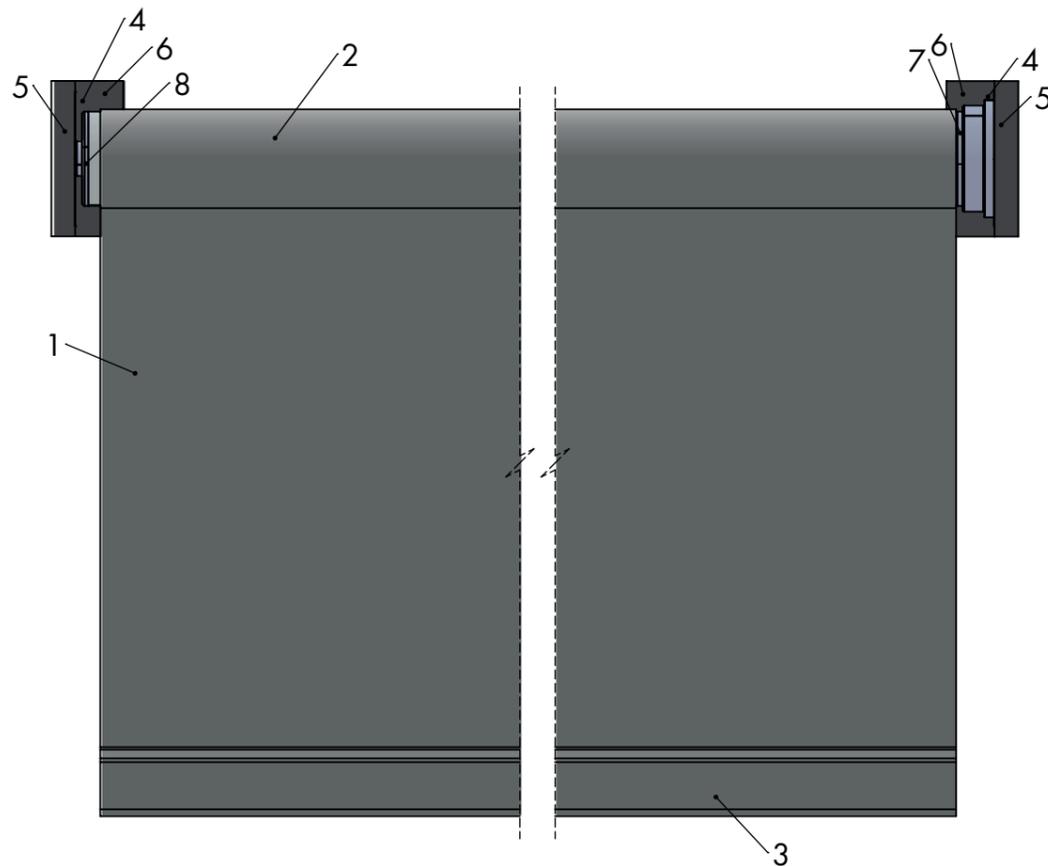

N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	SC..	screw cover
7	MOT..	motor+ adapter
8	EC..	end cup




PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..







FINB

SCALE 1:5

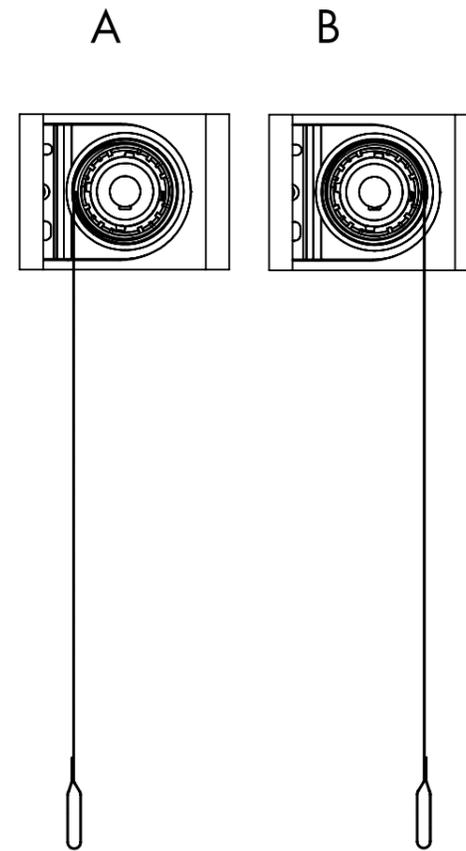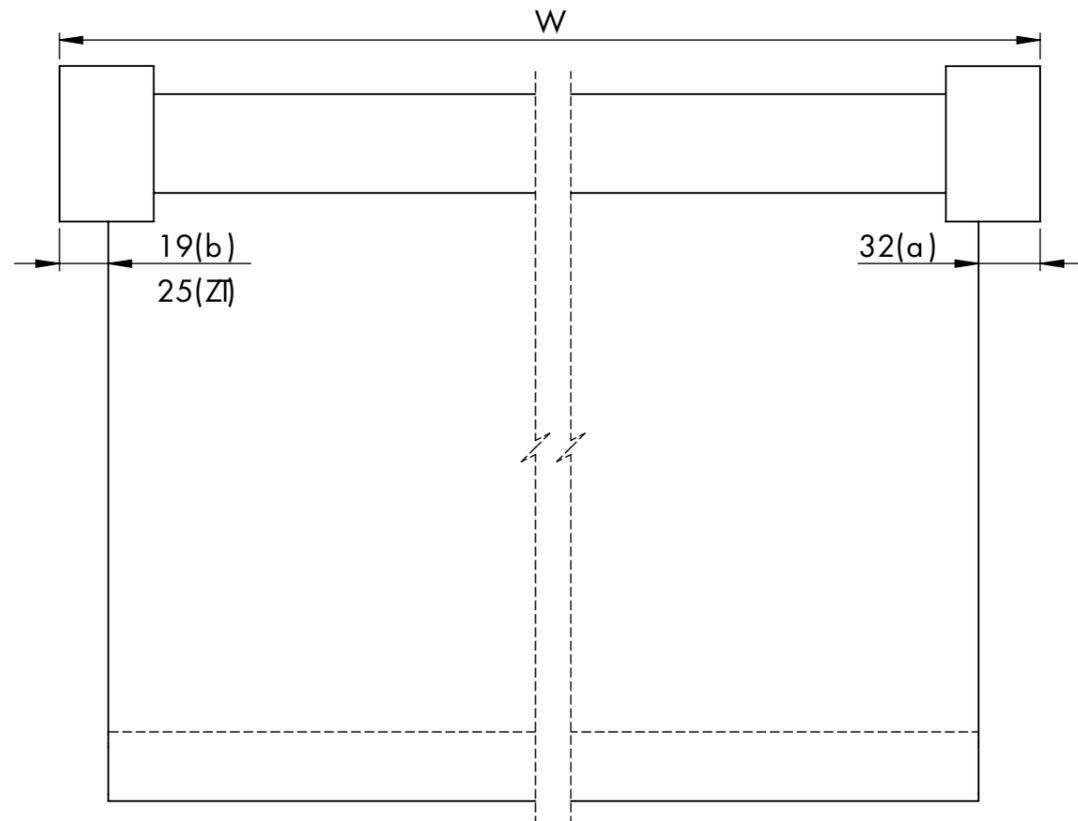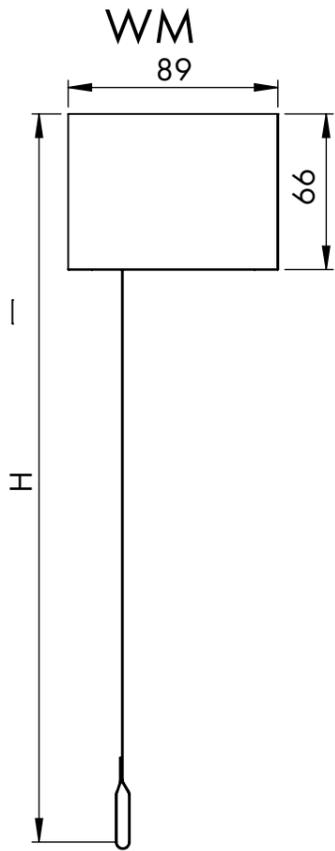

REN40

230V MOTOR SOMFY

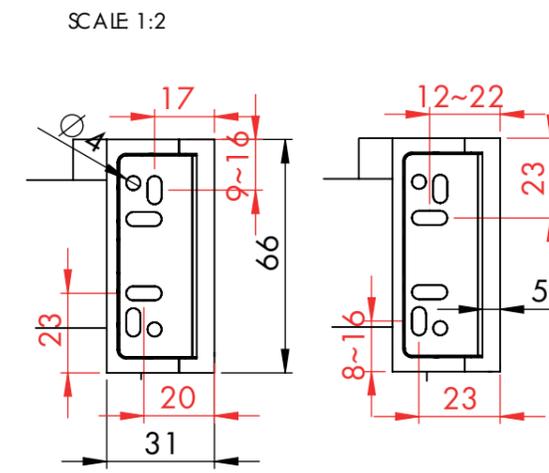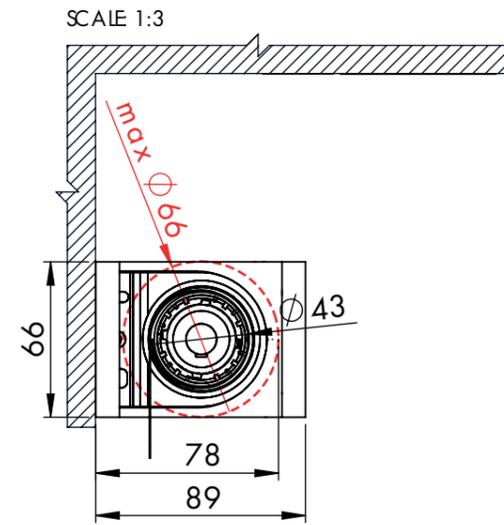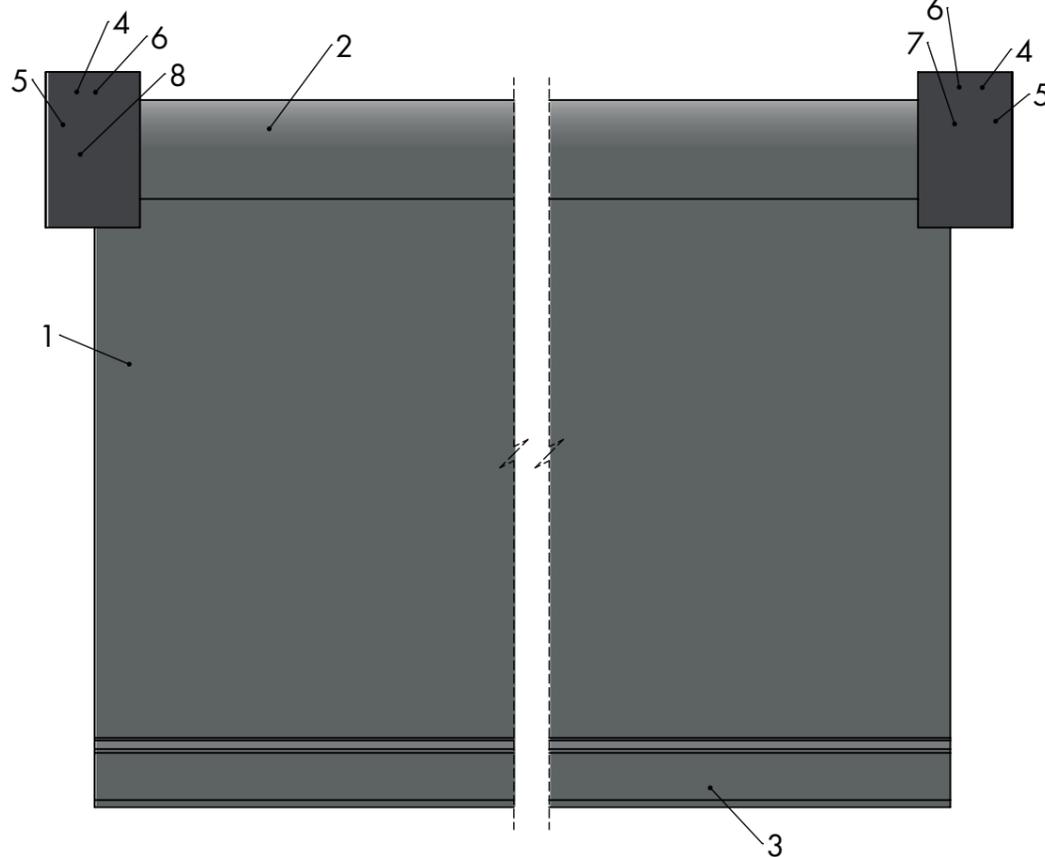

N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	SC..	screw cover
7	MOT..	motor+ adapter
8	EC..	end cup



PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall)
- Control Side L (left) or R (right)
- Bottom bar FN..






FN..

SCALE 1:5

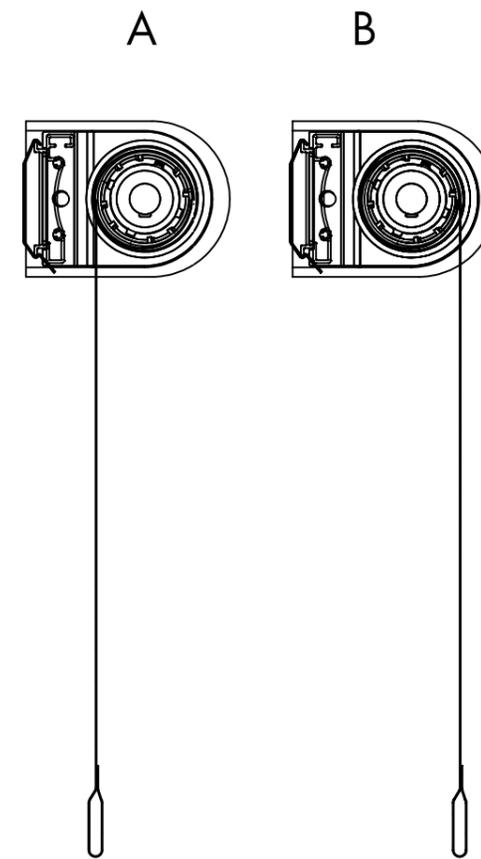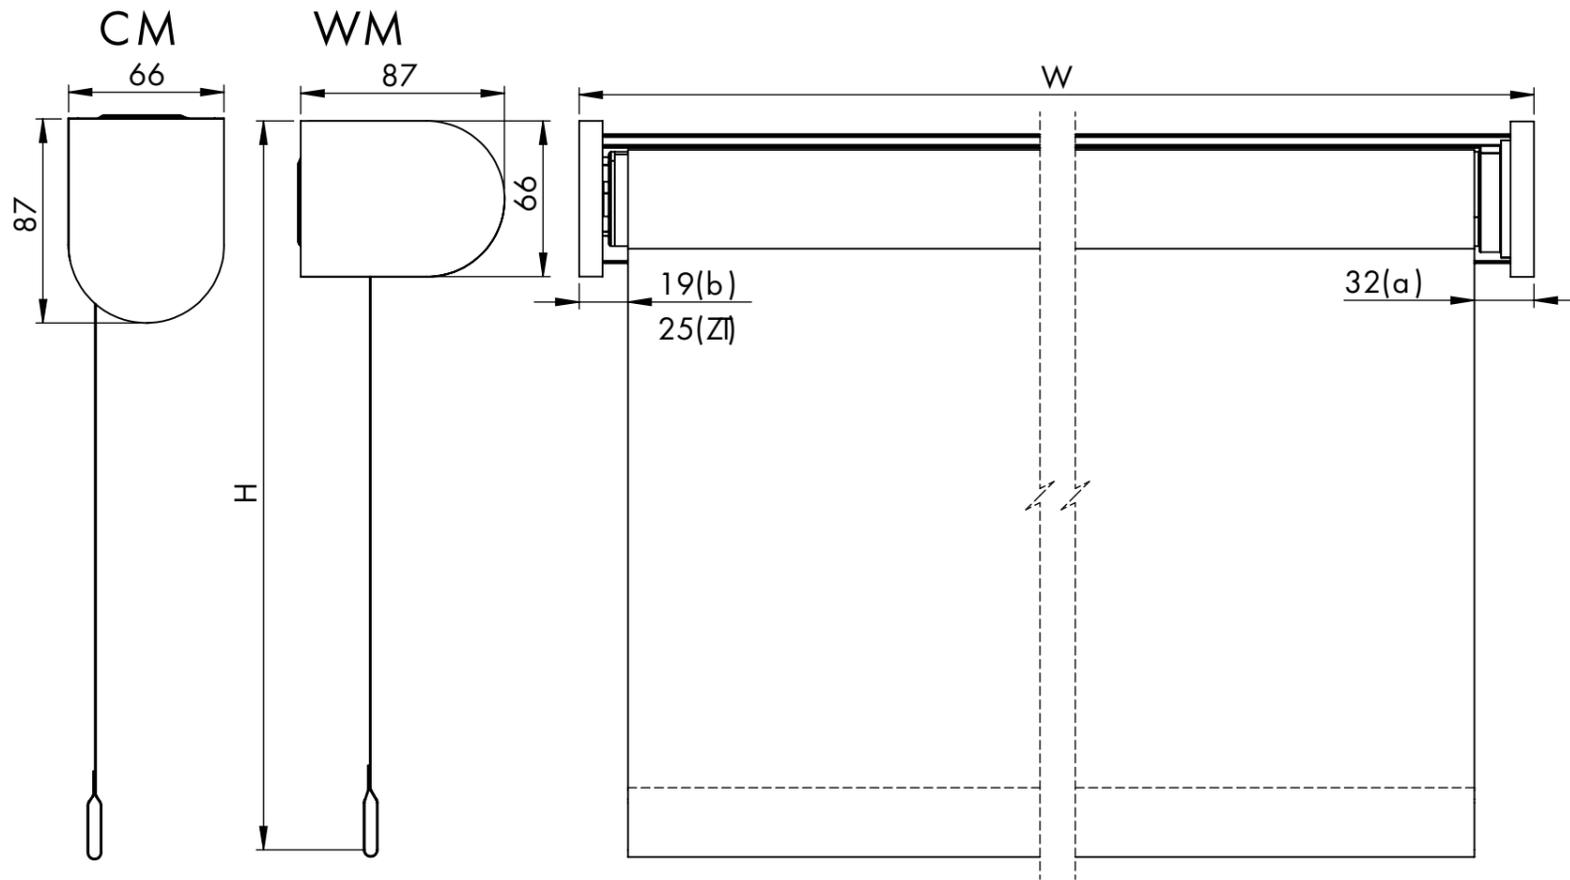

REN40

230V MOTOR SOMFY

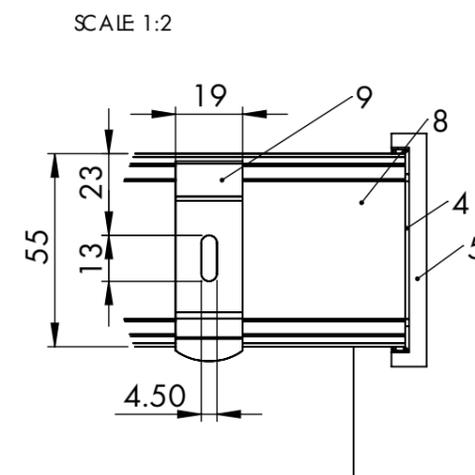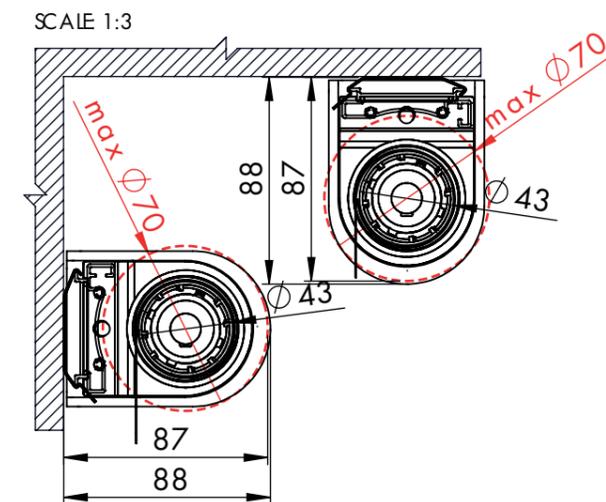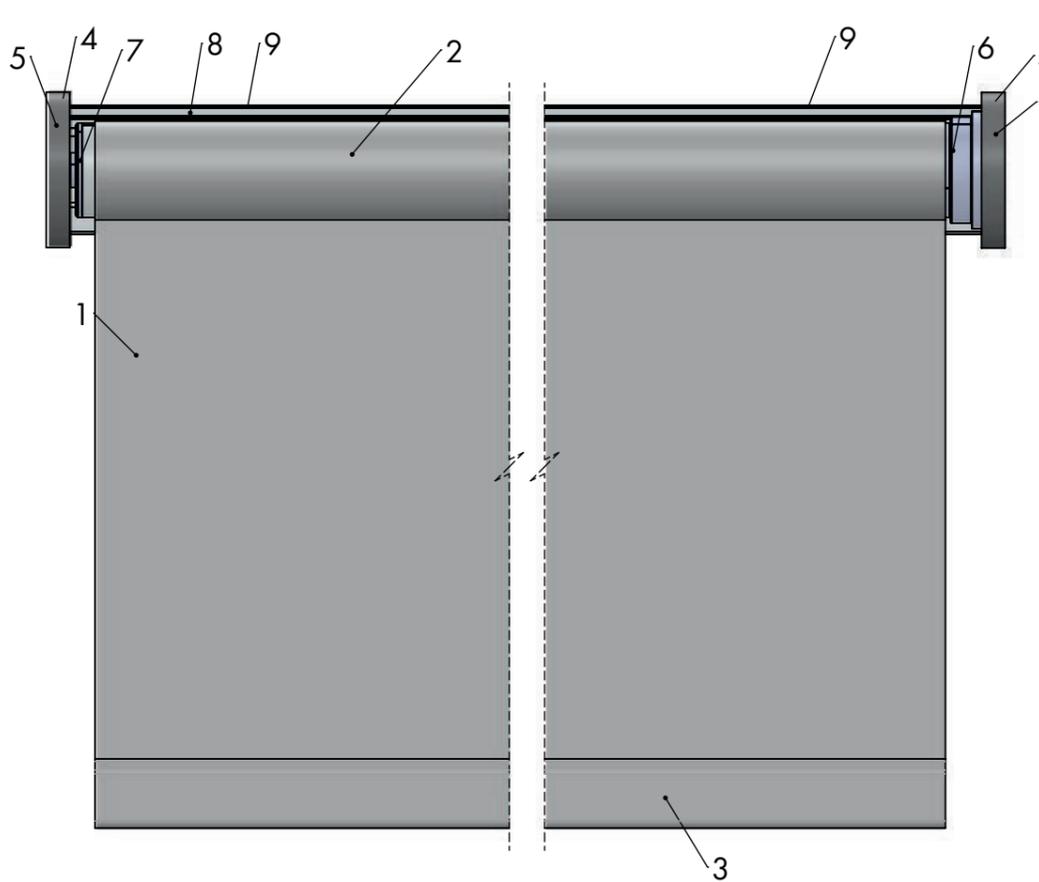



PARAMETERS

Width	W (in mm)
Height	H (in mm)
Fabric	F..
Unwinding	A or B (contra)
Mounting	WM (wall) or CM (ceiling)
Control Side	L (left) or R (right)
Bottom bar	FN..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MP..	mounting profile
9	MC..	mounting clip






FN..

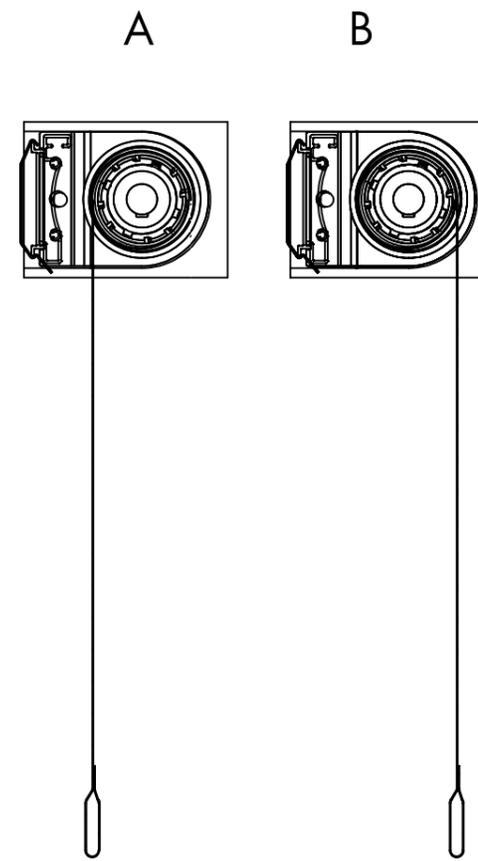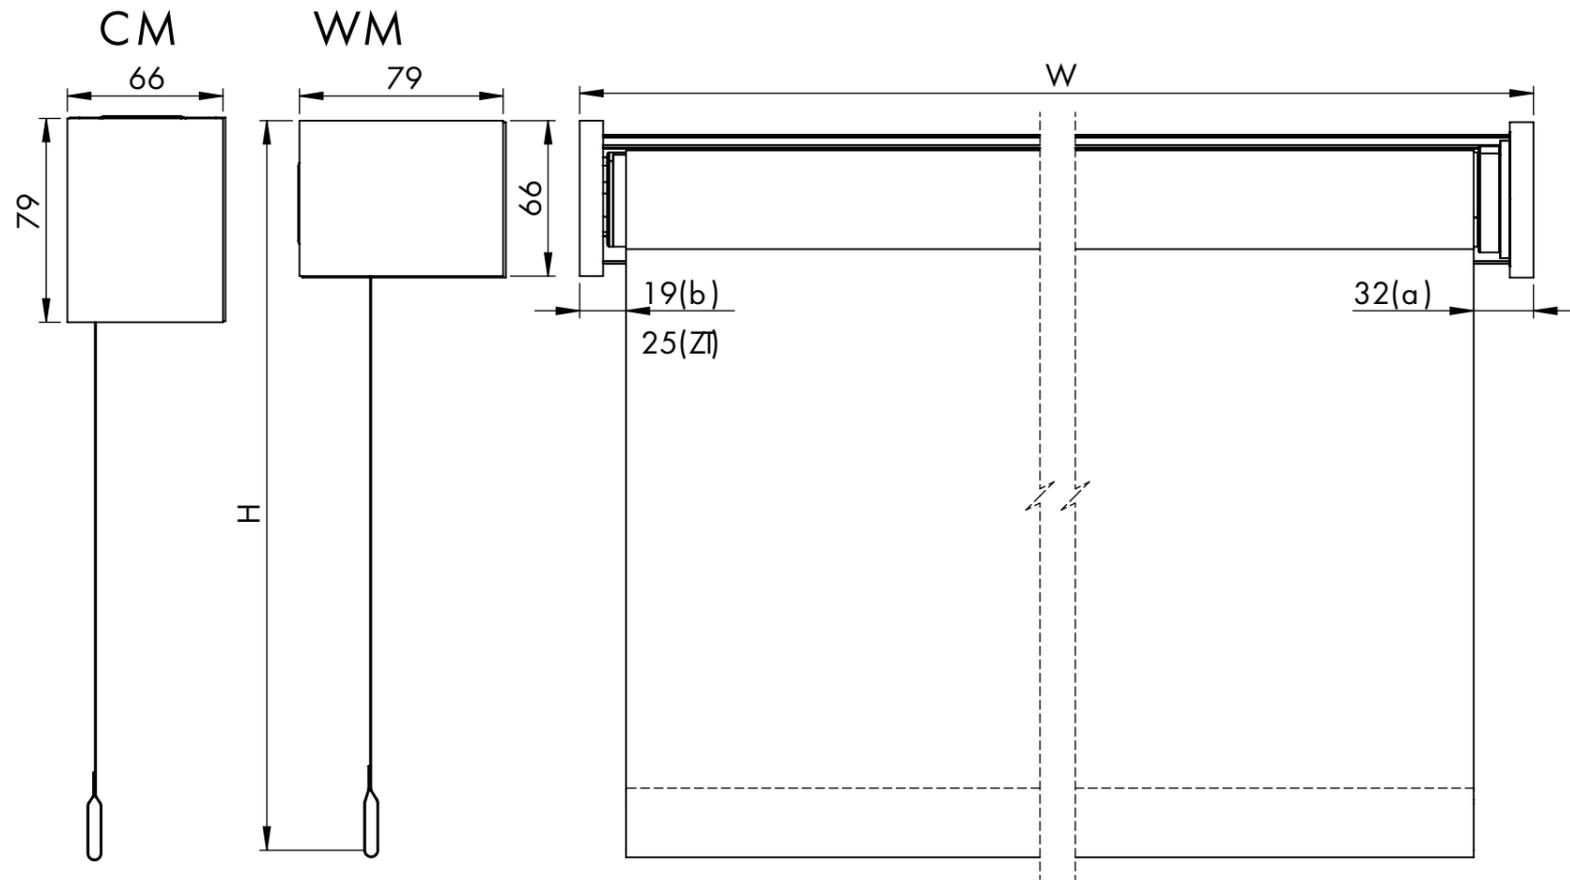

REN40

230V MOTOR SOMFY

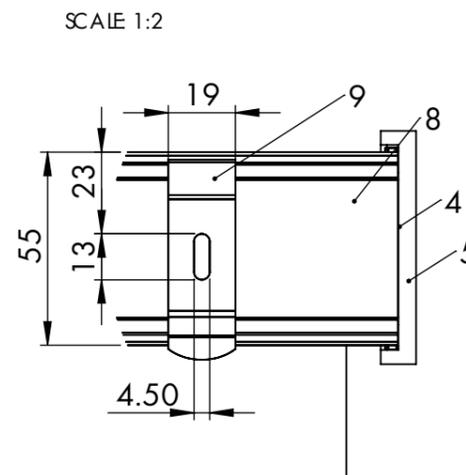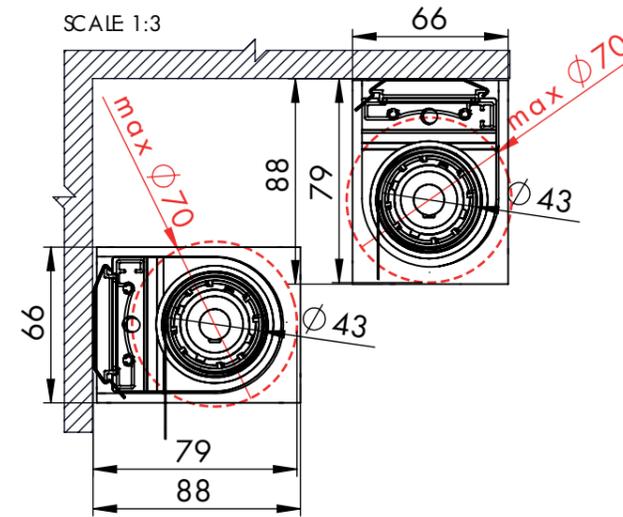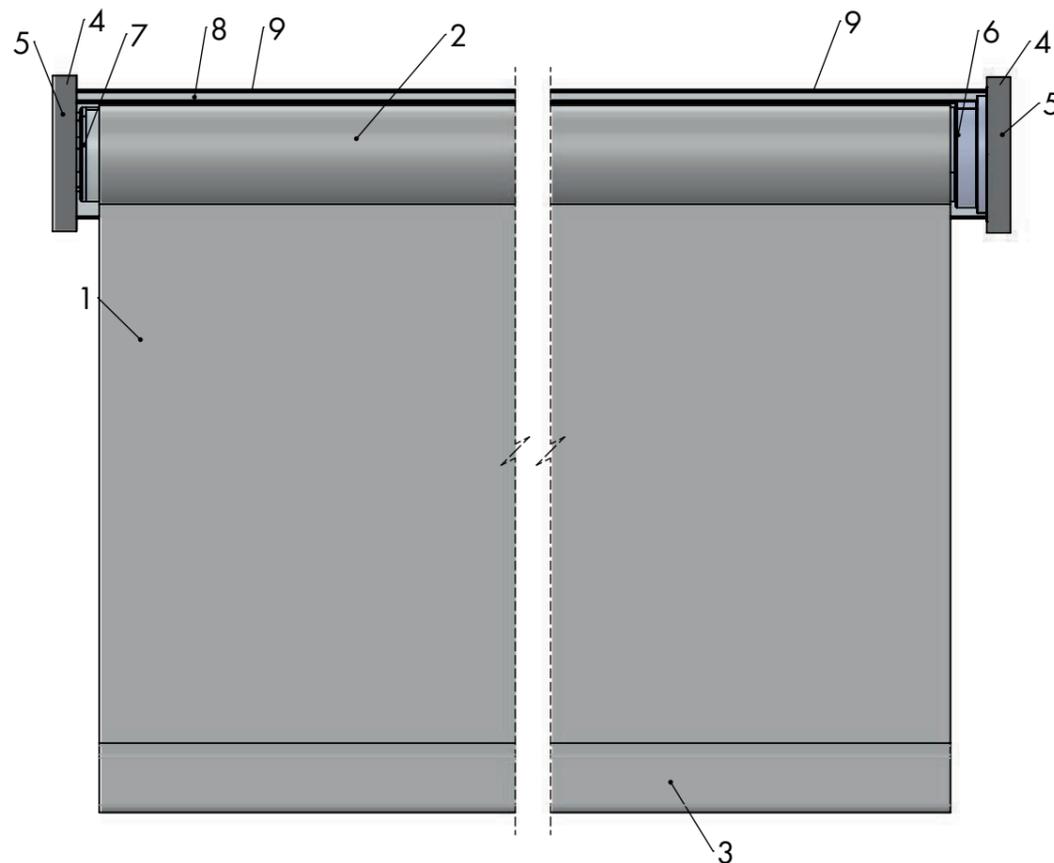

N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MP..	mounting profile
9	MC..	mounting clip




PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FN..






FN.B

SCALE 1:5

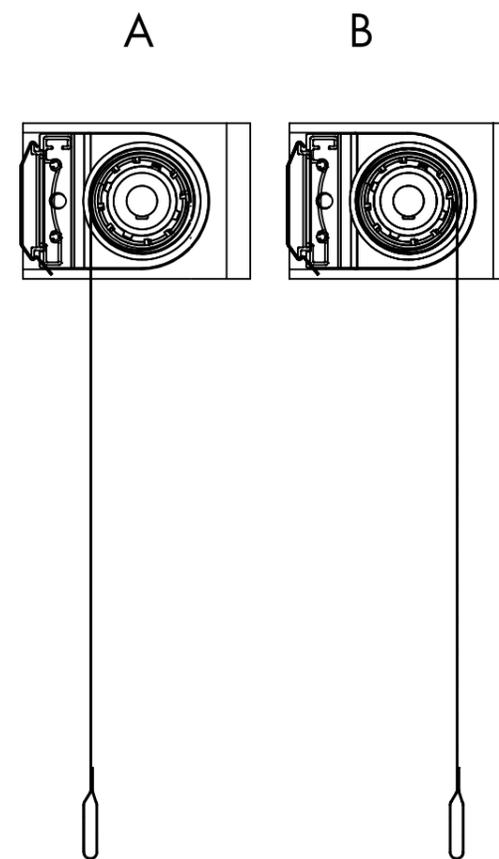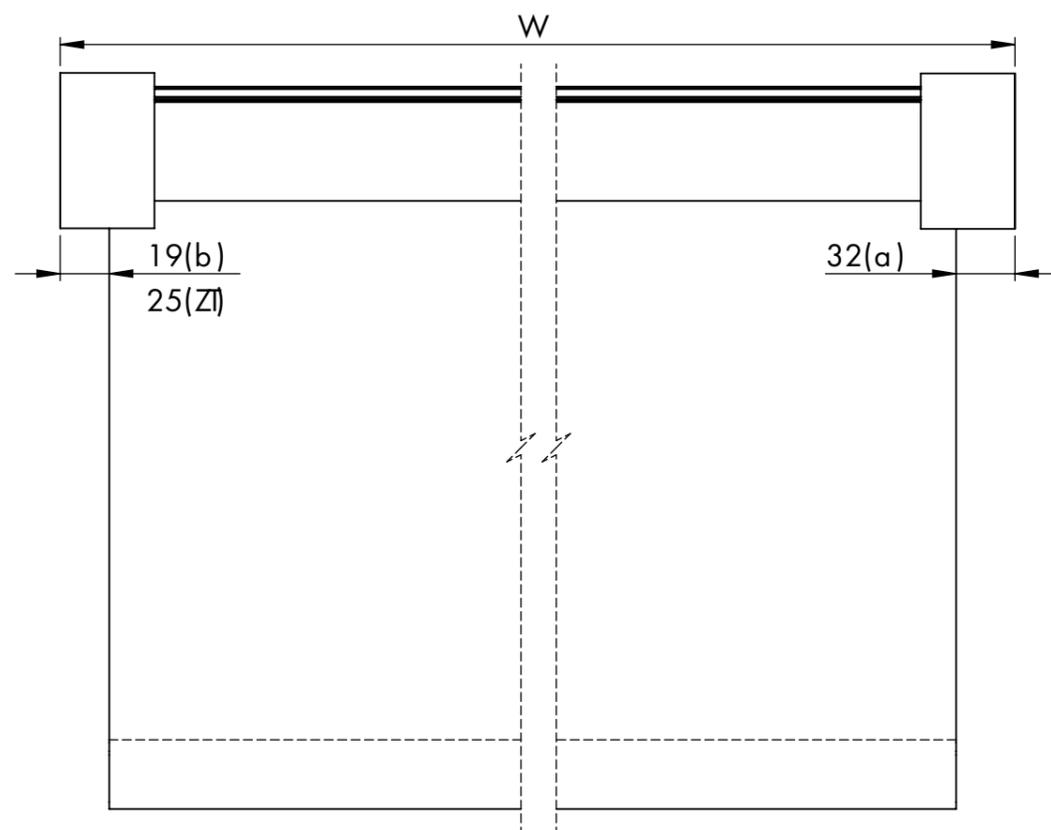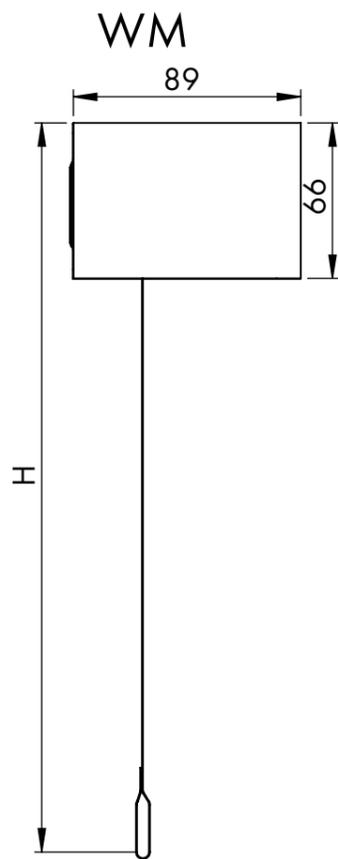

REN40

230V MOTOR SOMFY

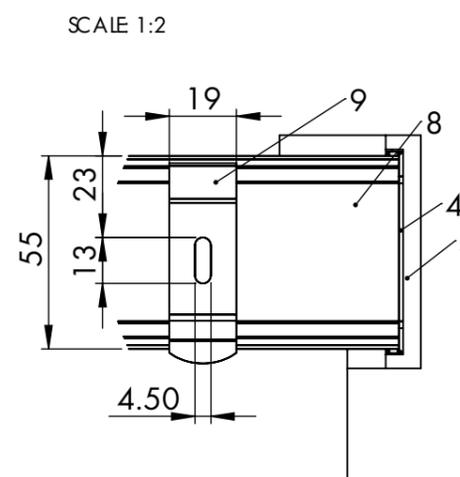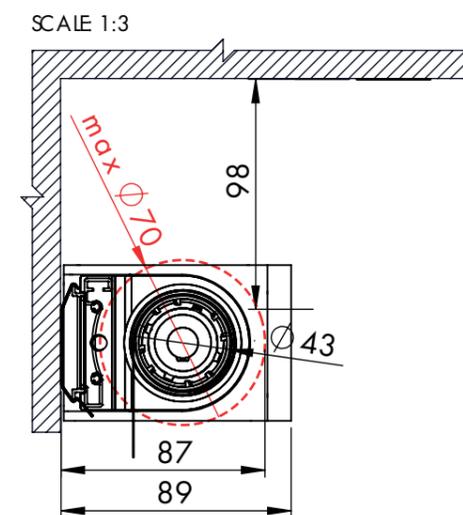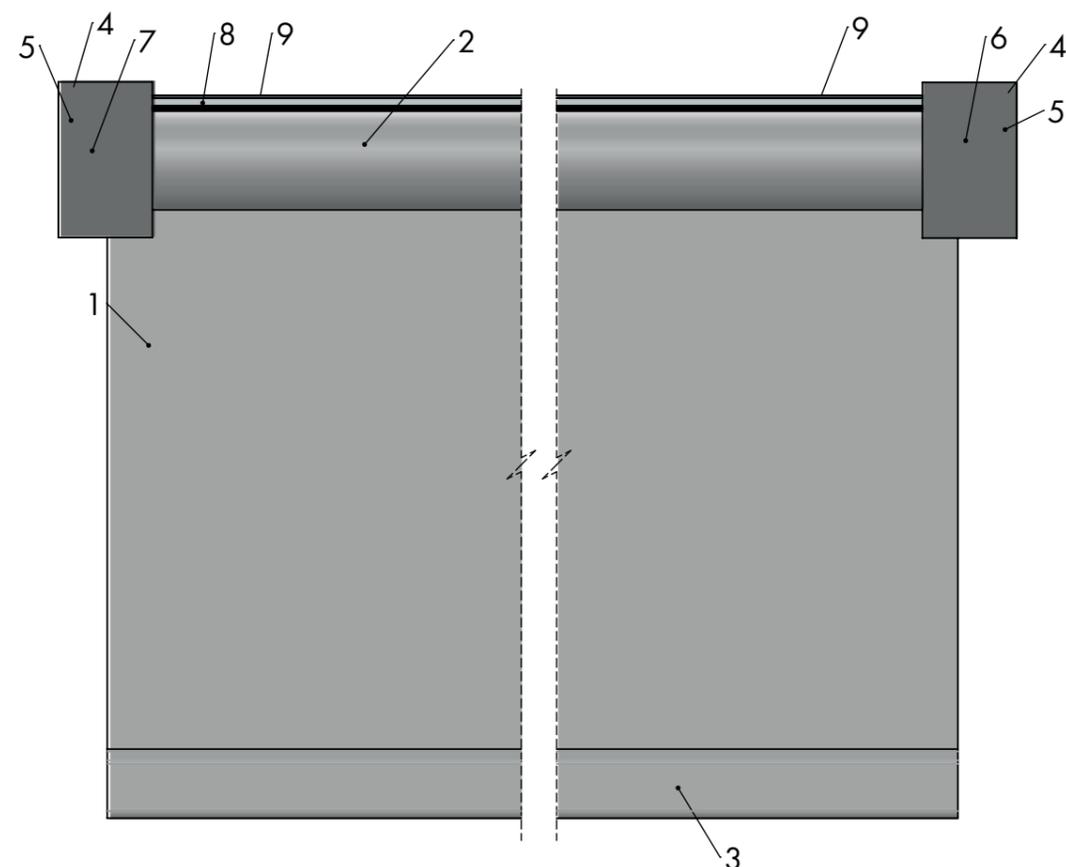

N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MP..	mounting profile
9	MC..	mounting clip




PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall)
- Control Side L (left) or R (right)
- Bottom bar FN..






FN..


SCALE 1:4

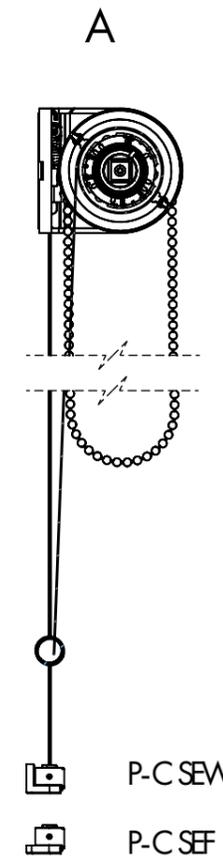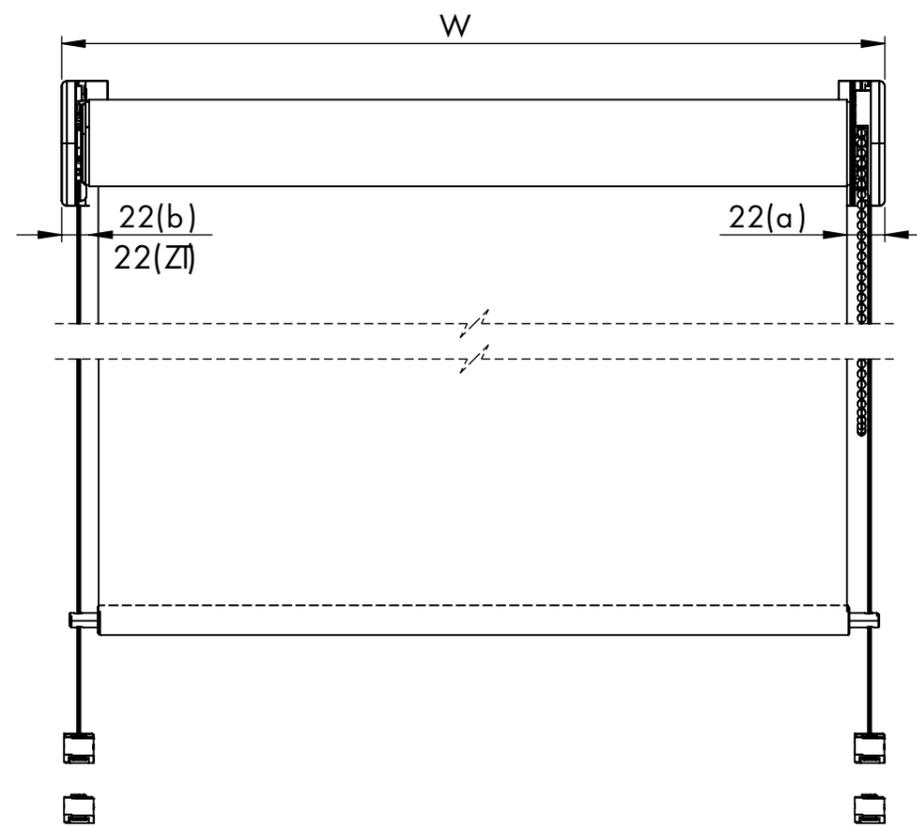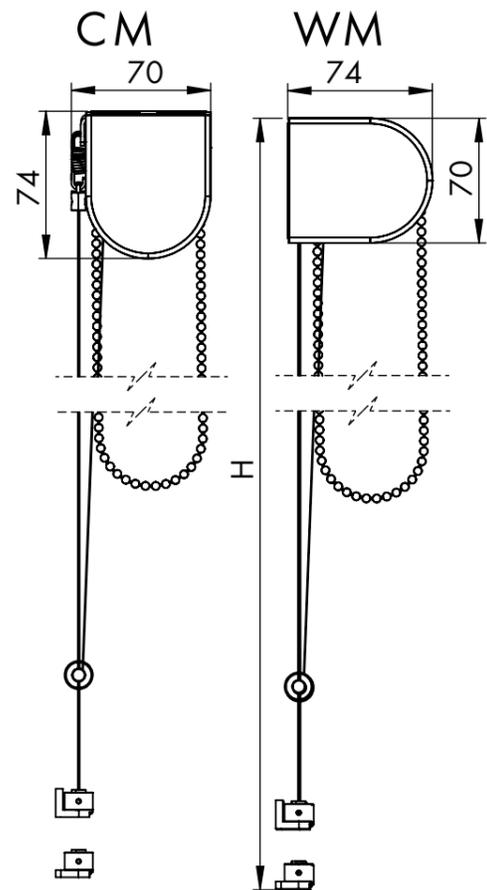

REN40 CHAIN

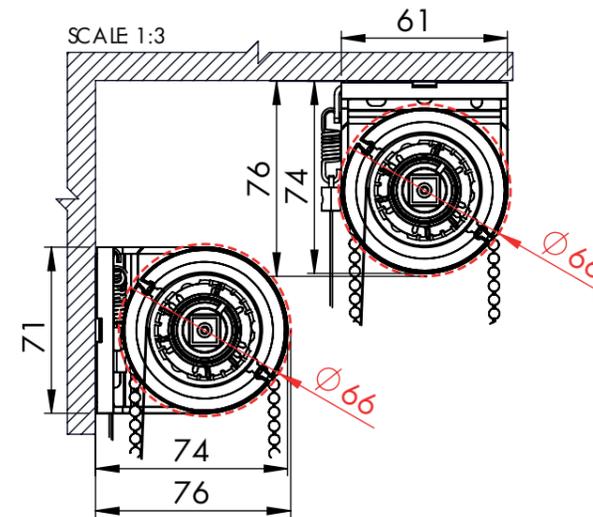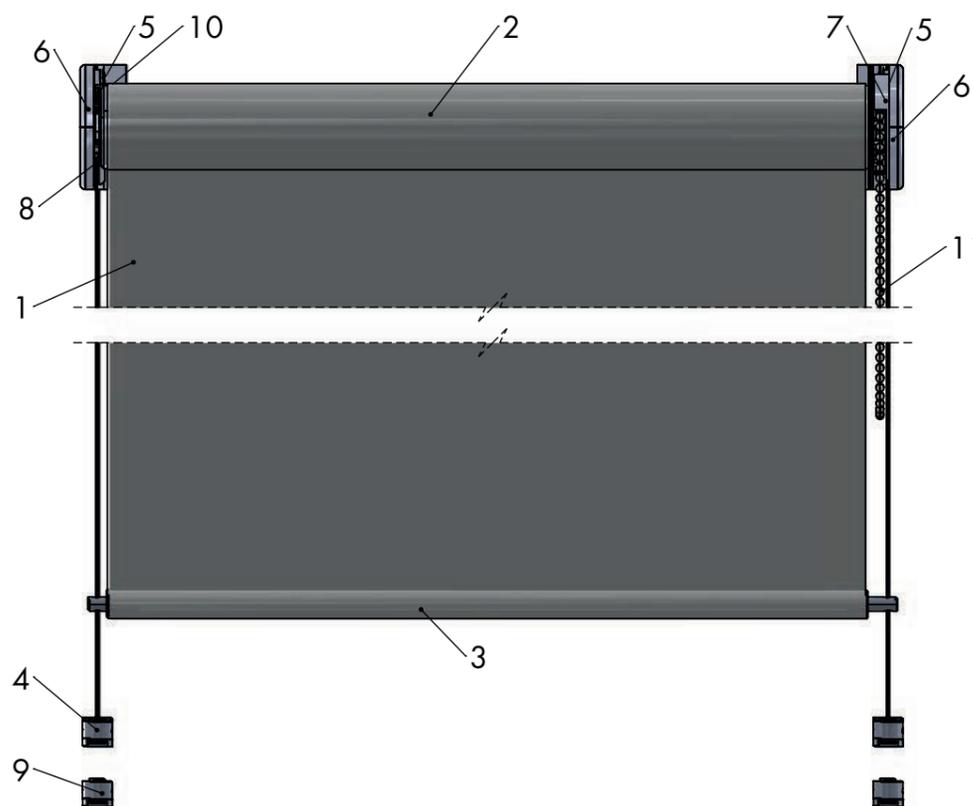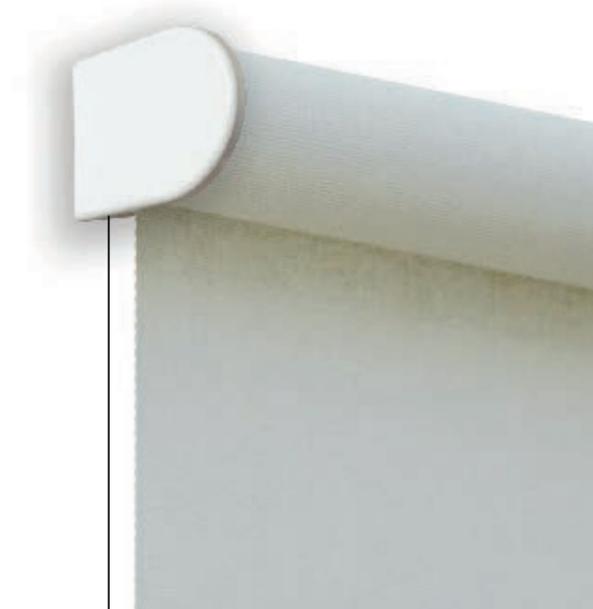

SCALE 1:2

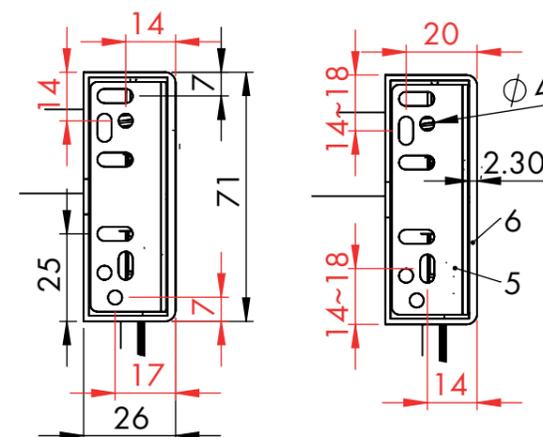

PARAMETERS




- Width W (in mm)
- Height H (in mm)
- Fabric F.
- Unwinding only A
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..

N	CODE	DESCRIPTION
1	F.	fabric
2	AX32	tube
3	FIN..	bottom bar
4	SGB..	sideguiding pin FIN
5	B.	bracket
6	BC..	bracket cover
7	CHM..	chain mechanism
8	SGT.	sideguiding top set
9	SGD..	sideguiding down bracket
10	EC..	end cup
11	CH..	chain





FINB


SCALE 1:4

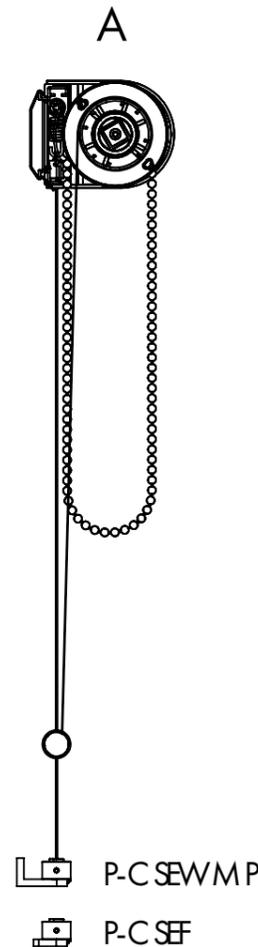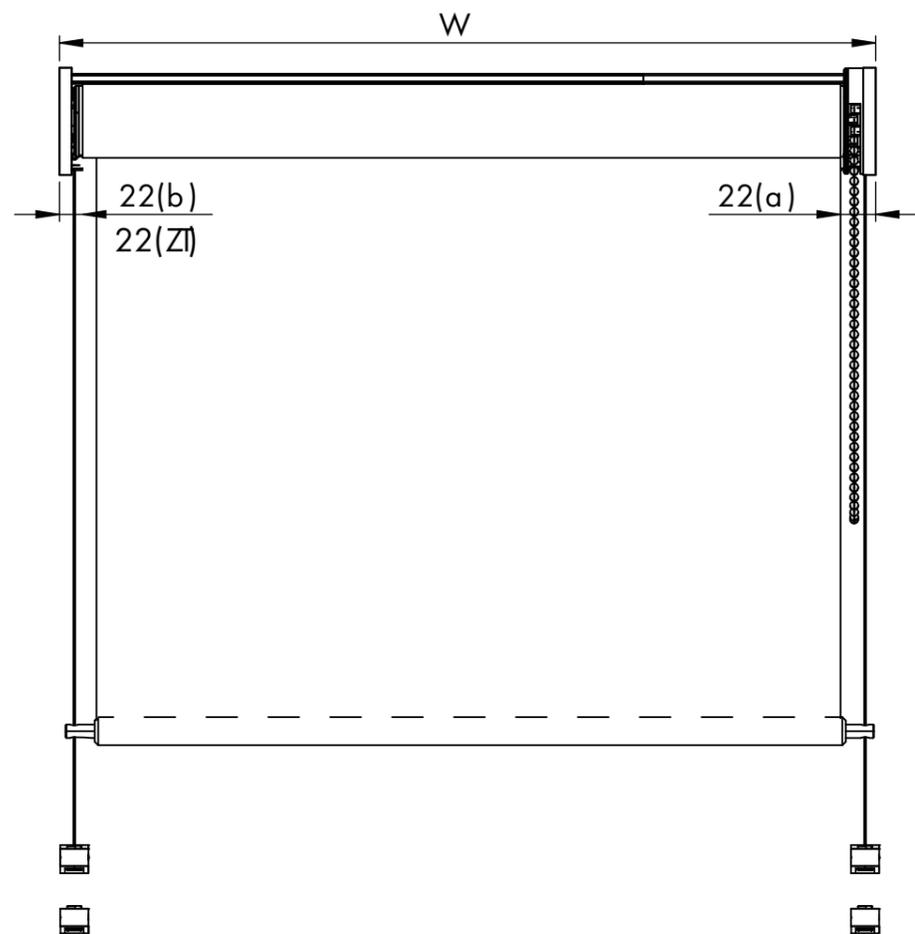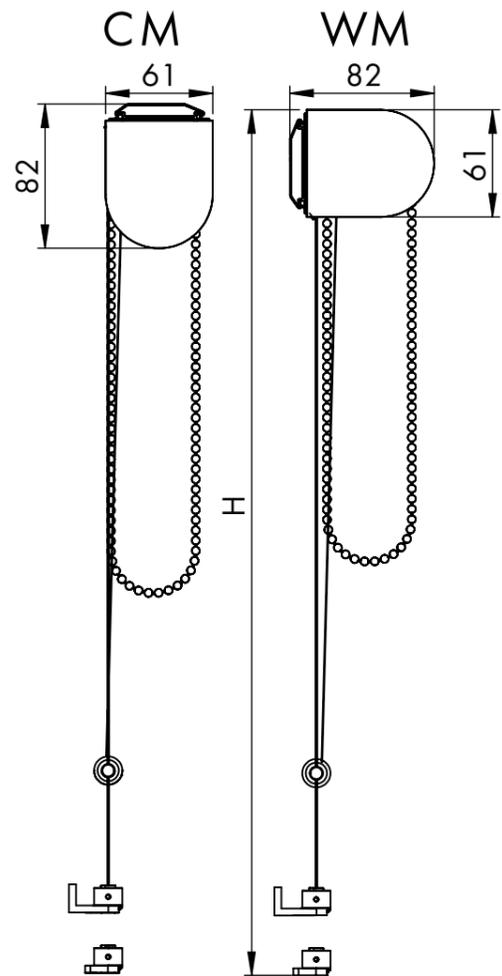

REN40 MPCS CHAIN

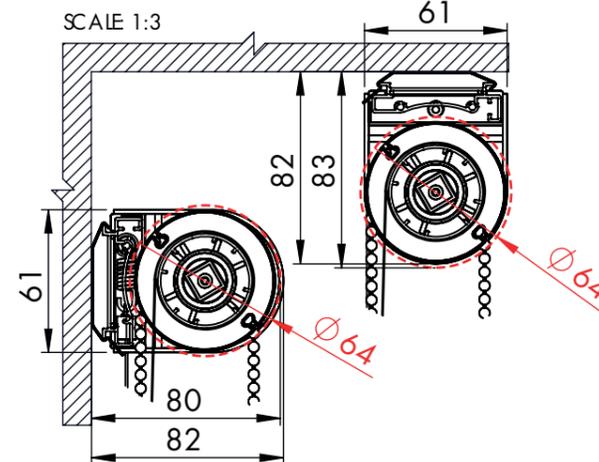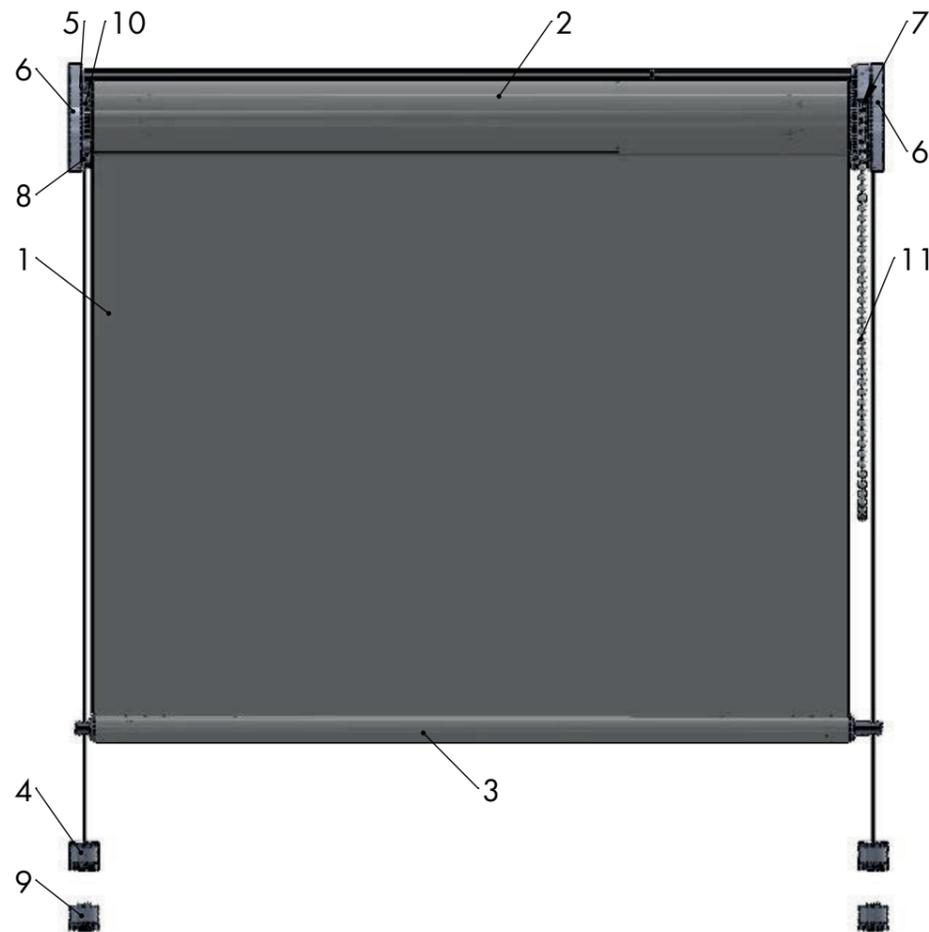

SCALE 1:2



N	CODE	DESCRIPTION
1	F..	fabric
2	AX32	tube
3	FN..	bottom bar
4	SGB..	sideguiding pin FN
5	B..	bracket
6	BC..	bracket cover
7	CHM..	chain mechanism
8	SGT..	sideguiding top set
9	SGD..	sideguiding down bracket
10	EC..	end cup
11	CH..	chain




PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding only A
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FN..






FN B

SCALE 1:4

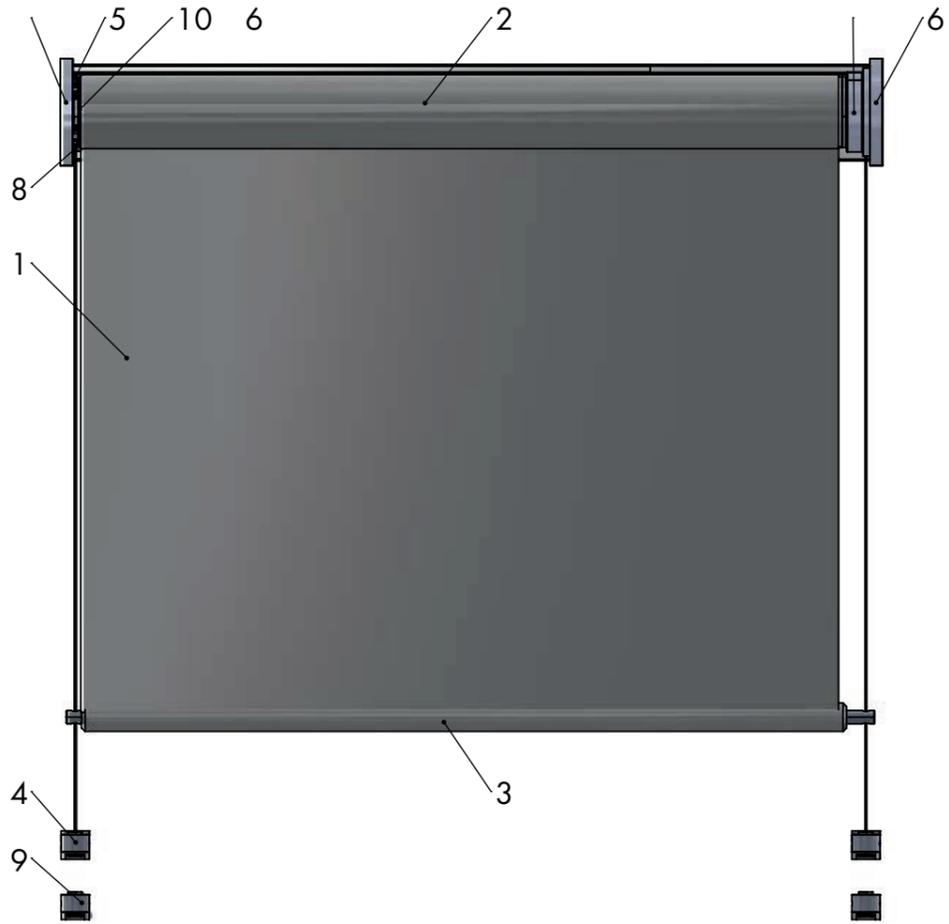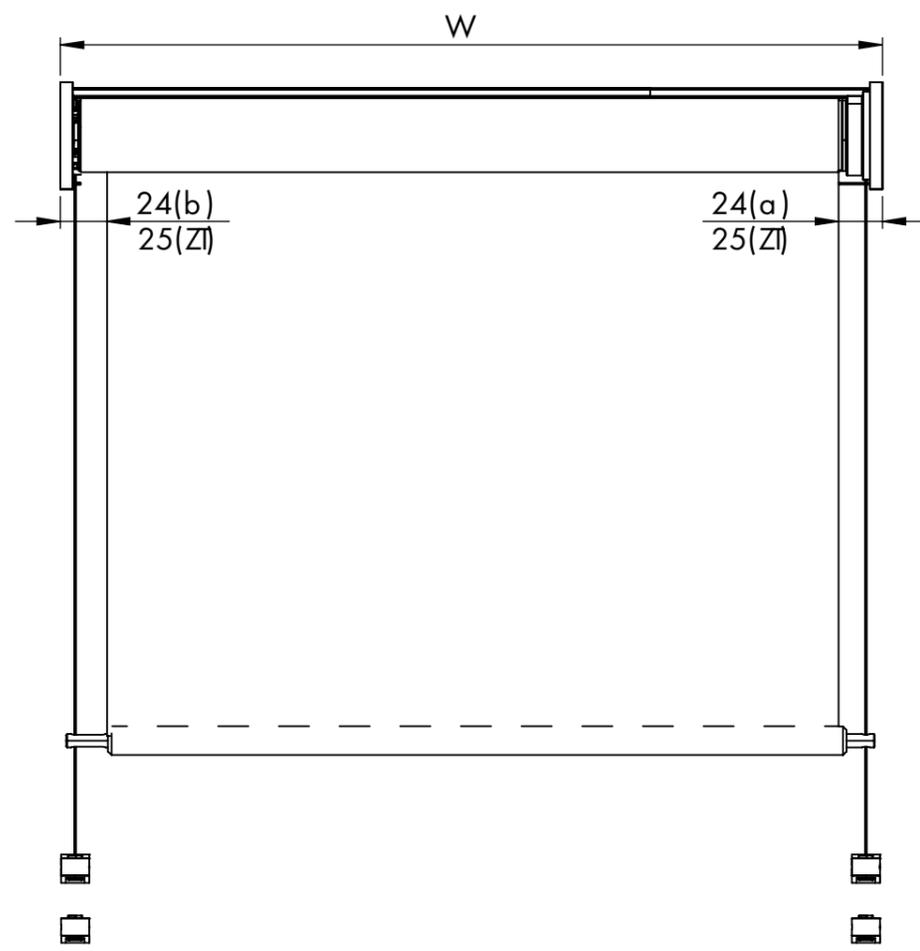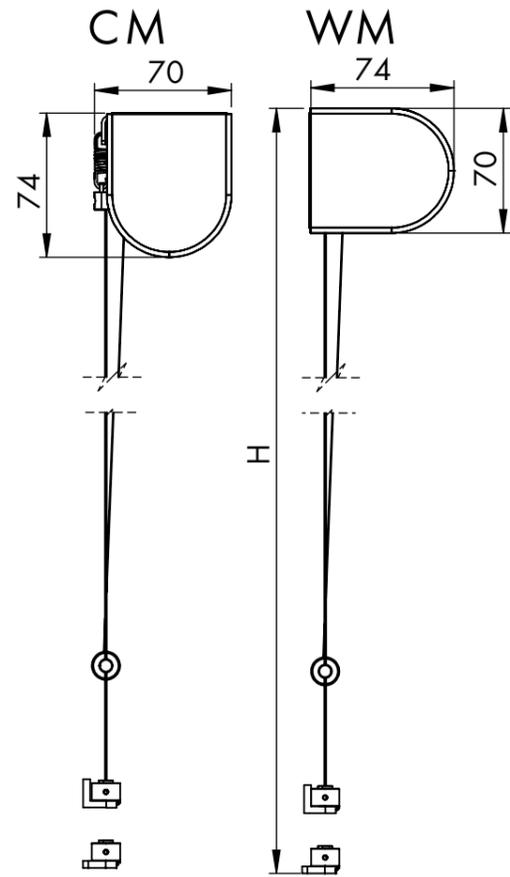


N	CODE	DESCRIPTION
1	F..	fabric
2	AX32	tube
3	FN..	bottom bar
4	SGB..	sideguiding pin FN
5	B..	bracket
6	BC..	bracket cover
7	CHM..	motor+adapter
8	SGT..	sideguiding top set
9	SGD..	sideguiding down bracket
10	EC..	end cup

A

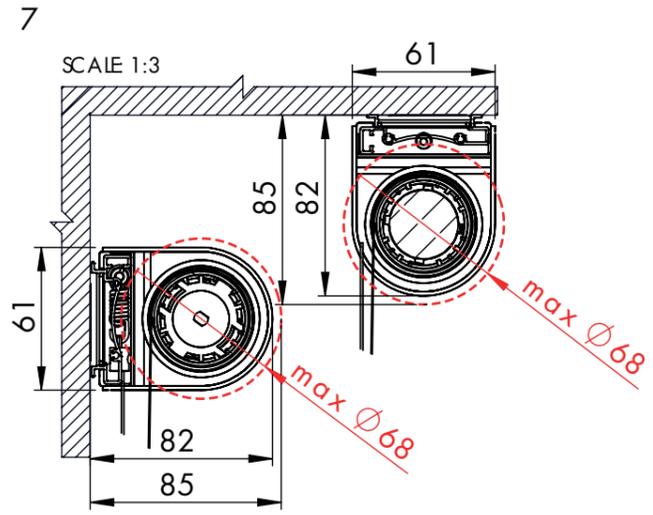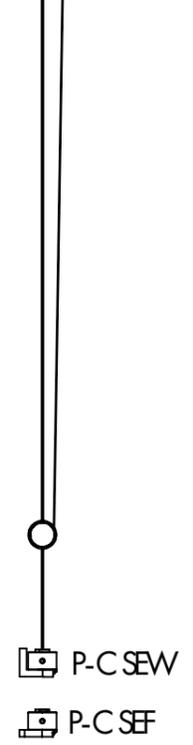

SCALE 1:2




REN40 ACCUMOTOR SOMFY RTS






PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding only A
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FN..





FNB

SCALE 1:4

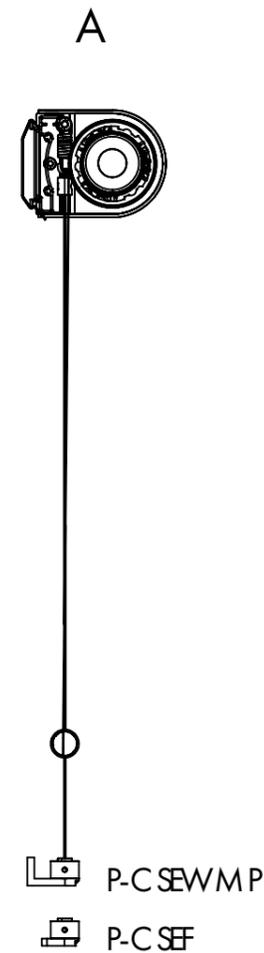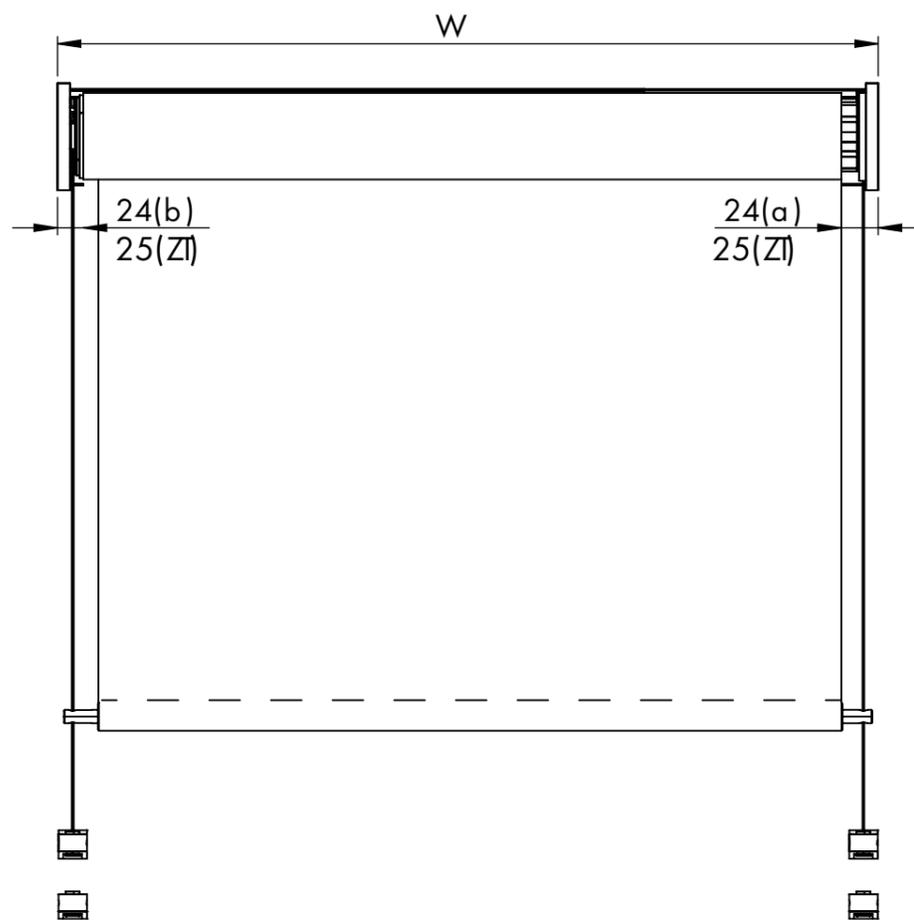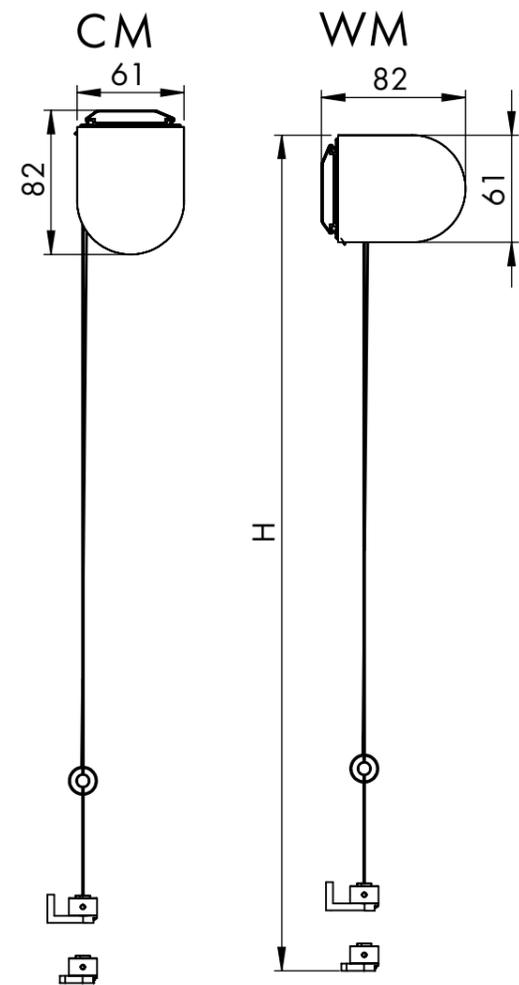


REN40

ACCU MOTOR SOMFY RTS

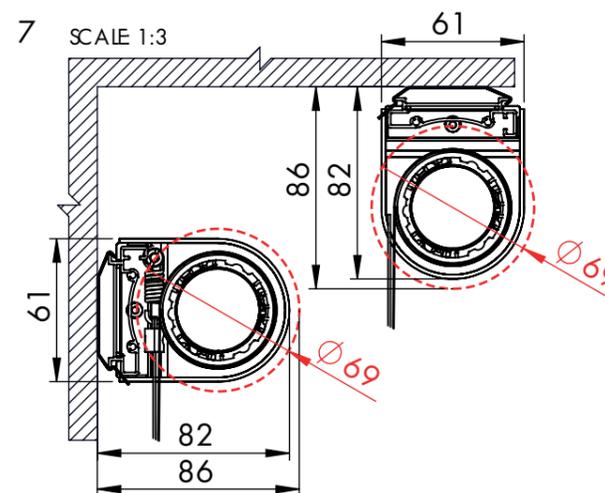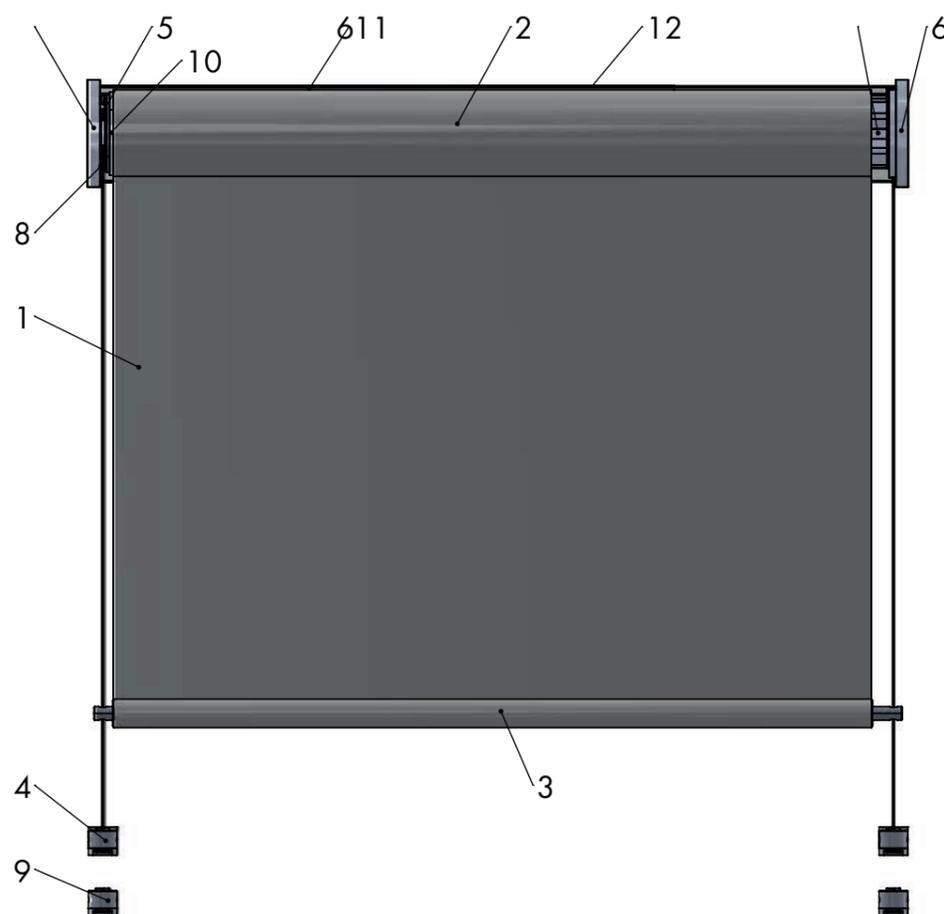

SCALE 1:2



N	CODE	DESCRIPTION
1	F..	fabric
2	AX32	tube
3	FN..	bottom bar
4	SGB..	sideguiding pin FN
5	B..	bracket
6	BC..	bracket cover
7	MOT..	motor+ adapter
8	SGT..	sideguiding top set
9	SGD..	sideguiding down bracket
10	EC..	end cup
11	MP..	mounting profile
12	MC..	mounting clip




PARAMETERS

Width W (in mm)
 Height H (in mm)
 Fabric F..
 Unwinding only A
 Mounting WM (wall) or CM (ceiling)
 Control Side L (left) or R (right)
 Bottom bar FN..





FN B


SCALE 1:4

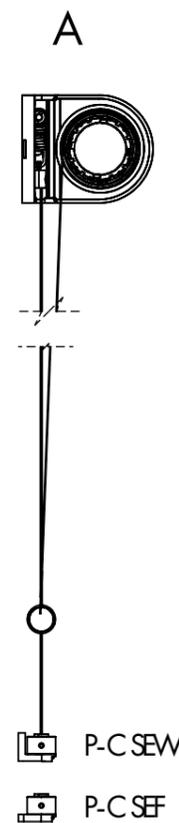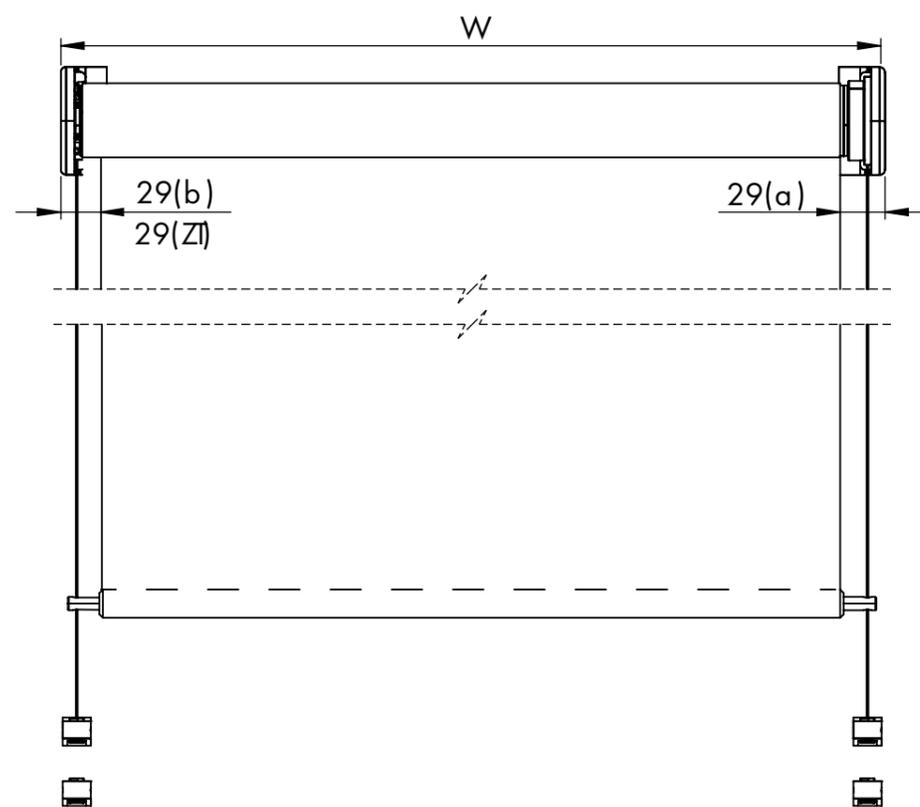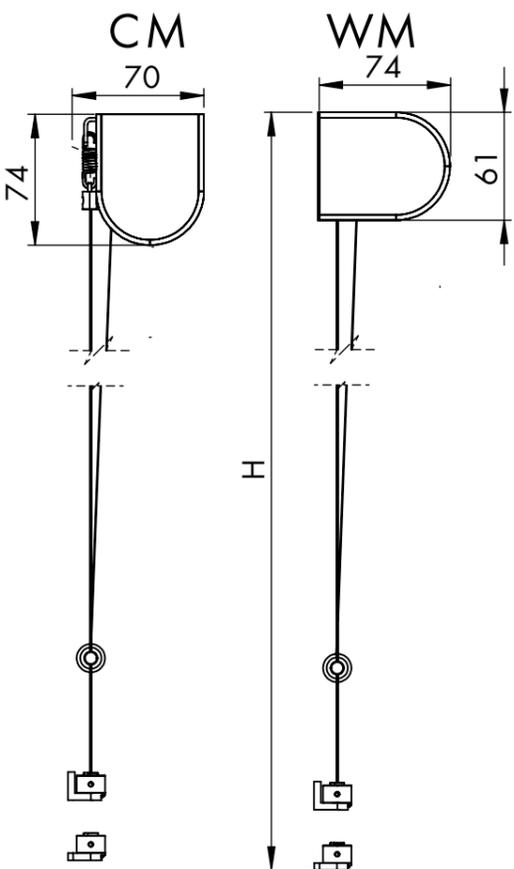

REN40 230V MOTOR SOMFY

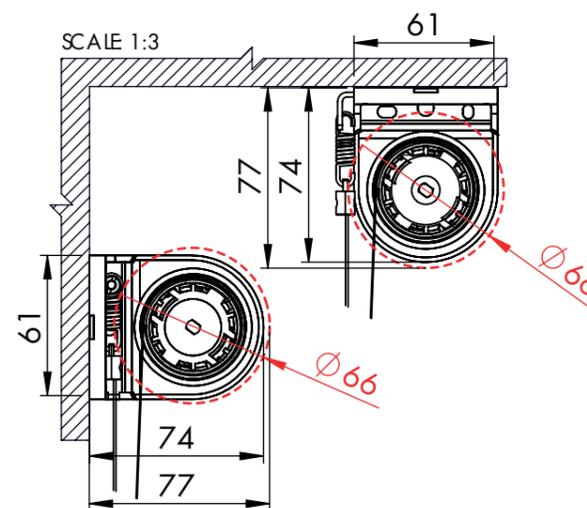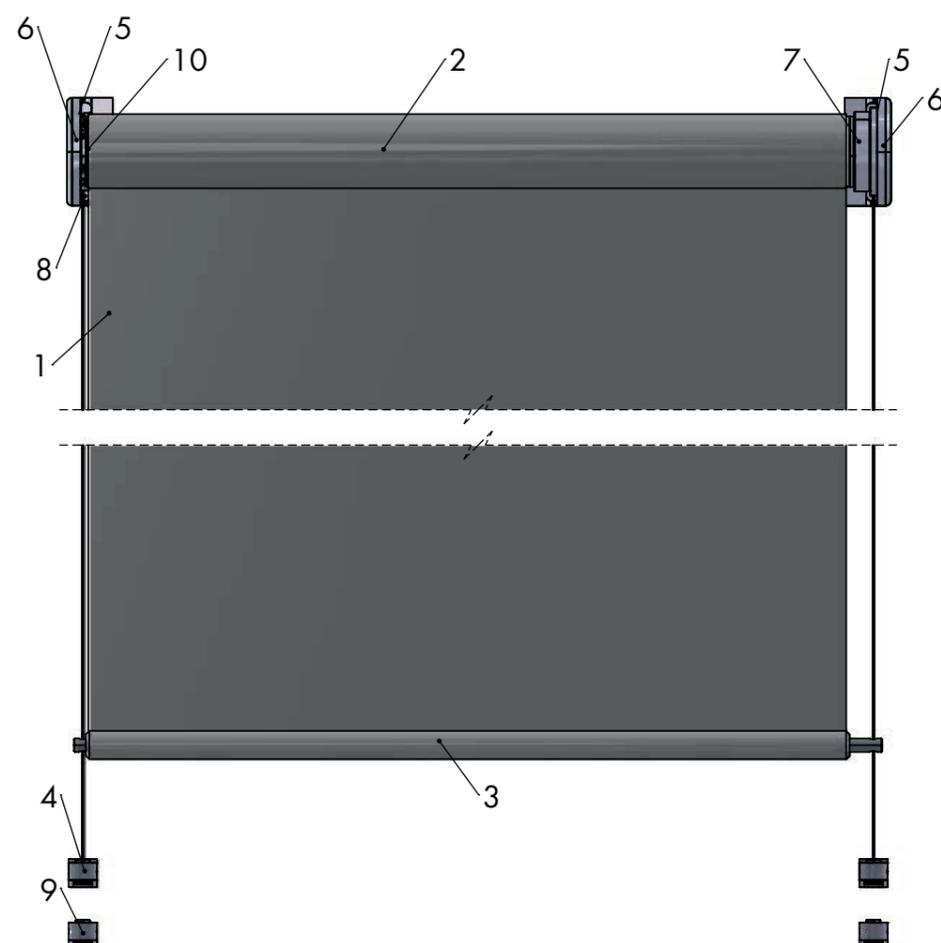

SCALE 1:2

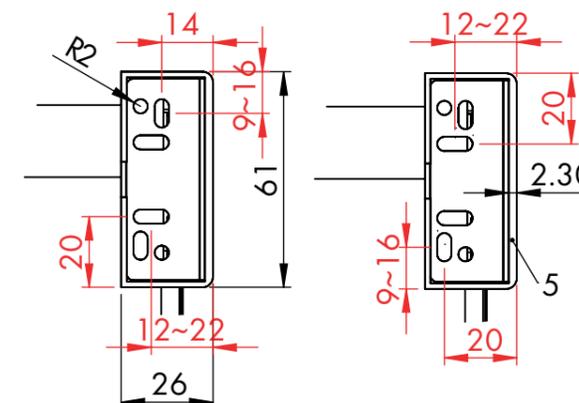

N	CODE	DESCRIPTION
1	F..	fabric
2	AX32	tube
3	FN..	bottom bar
4	SGB..	sideguiding pin FN
5	B..	bracket
6	BC..	bracket cover
7	MOT.	motor + adapter
8	SGT.	sideguiding top set
9	SGD..	sideguiding down bracke
10	EC..	end cup




PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding only A
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FN..






ANB

SCALE 1:4

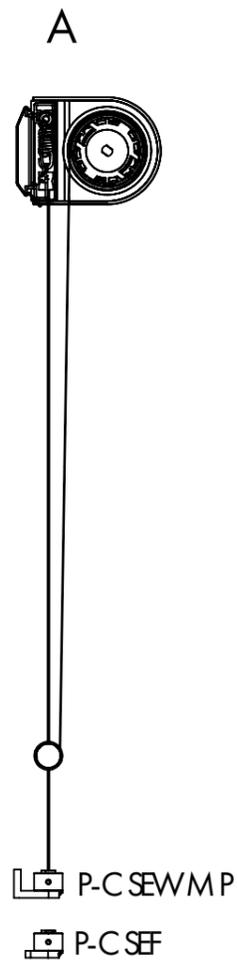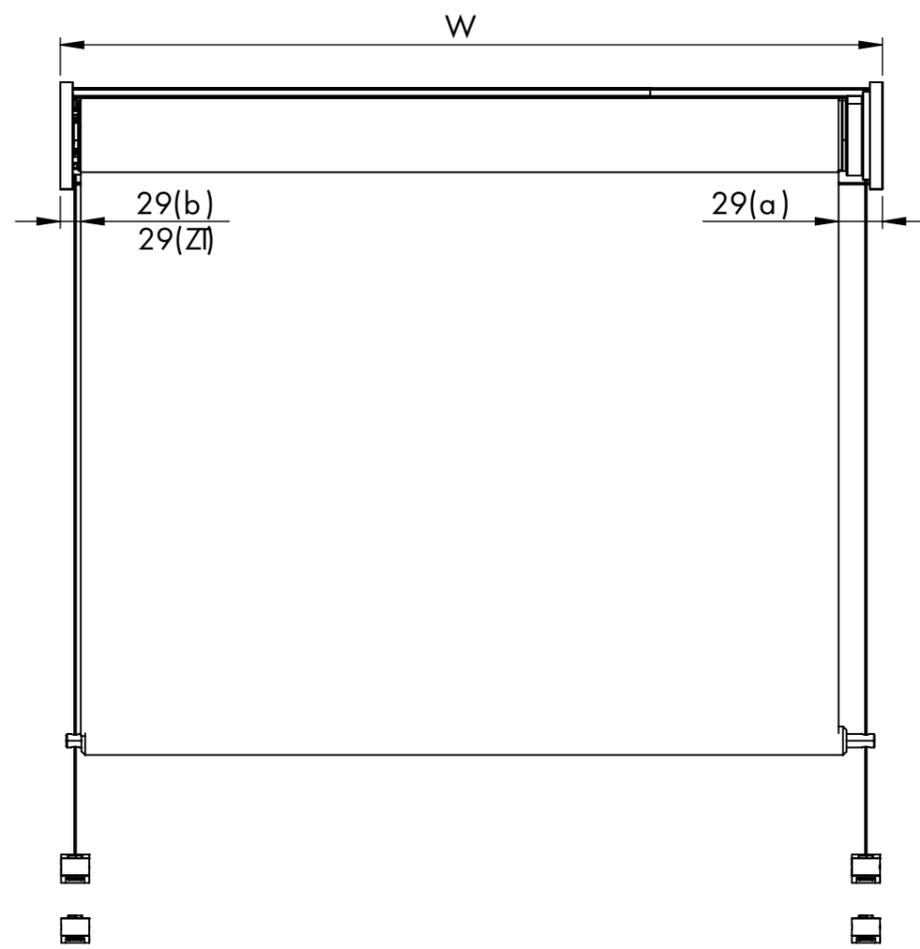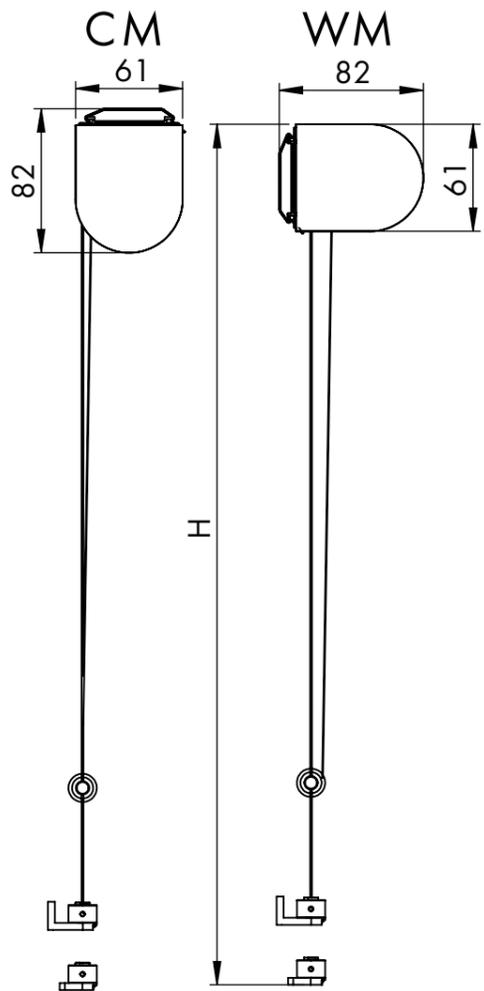


REN40 230V MOTOR SOMFY

230 V
 E, M, RTS, IO

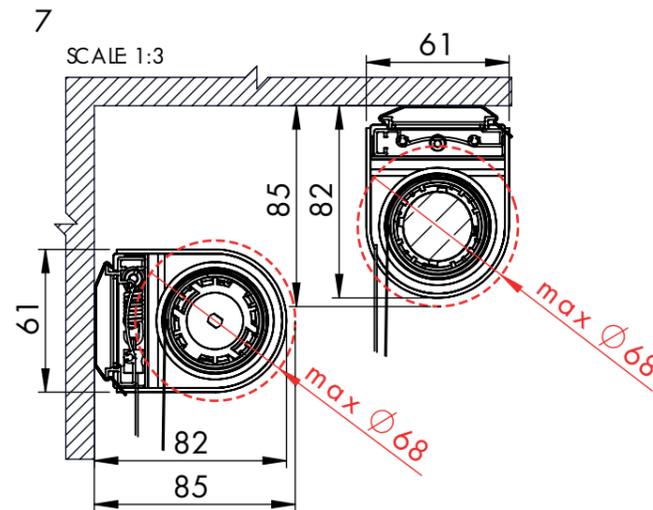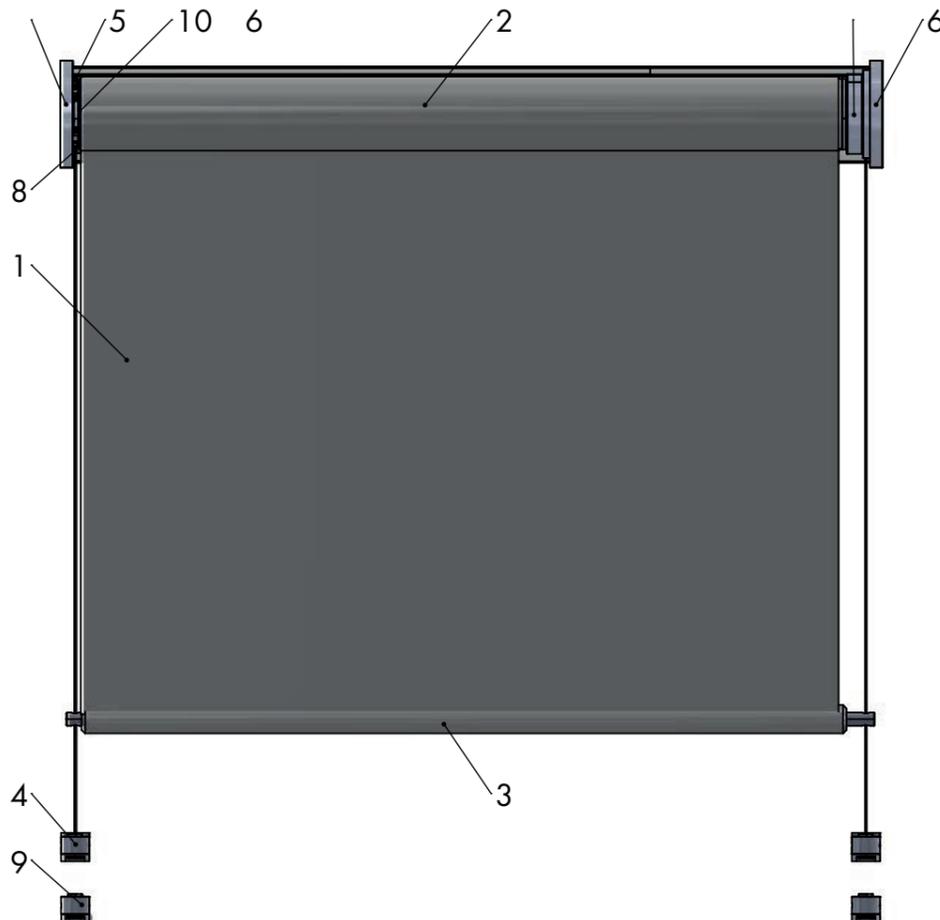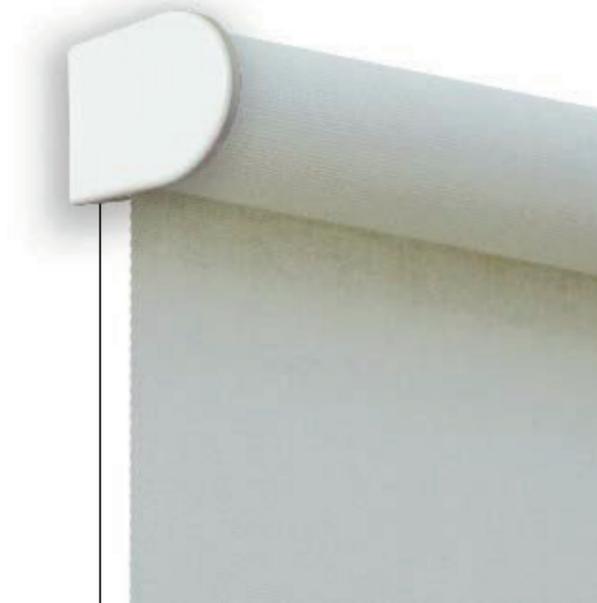

SCALE 1:2



N	CODE	DESCRIPTION
1	F..	fabric
2	AX32	tube
3	FN..	bottom bar
4	SGB..	sideguiding pin FN
5	B..	bracket
6	BC..	bracket cover
7	CHM..	motor+adapter
8	SGT..	sideguiding top set
9	SGD..	sideguiding down bracket
10	EC..	end cup


PARAMETERS

Width	W (in mm)
Height	H (in mm)
Fabric	F..
Unwinding	only A
Mounting	WM (wall) or CM (ceiling)
Control Side	L (left) or R (right)
Bottom bar	FN..





FN B

SCALE 1:3

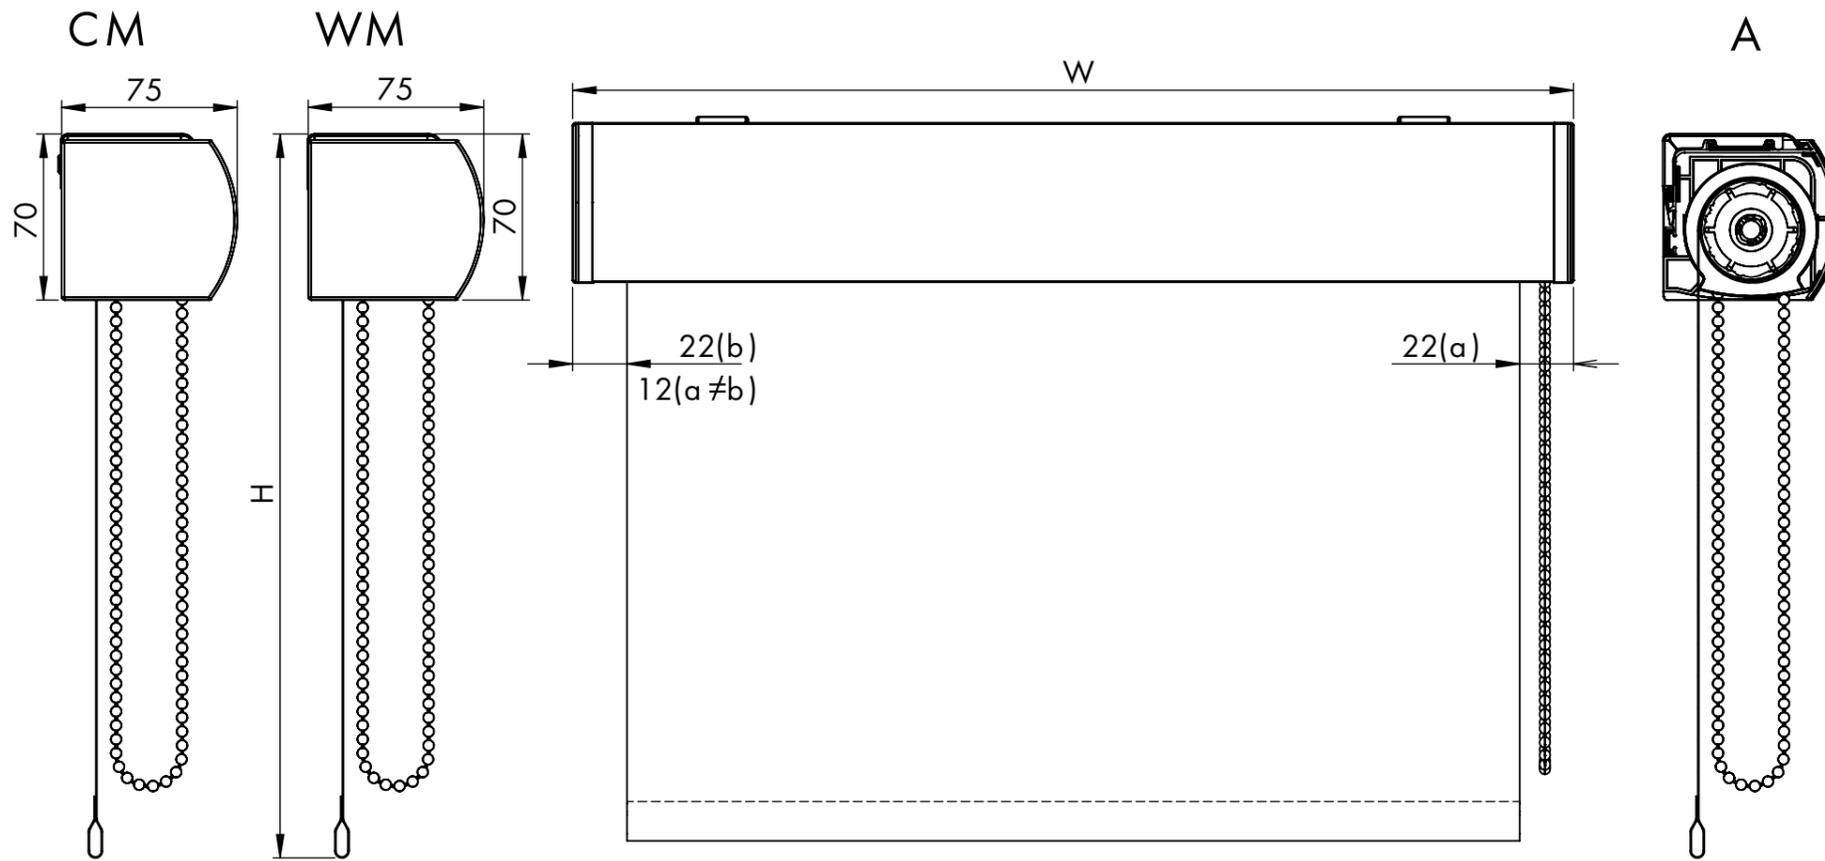

REN40 BOX 68 CHAIN

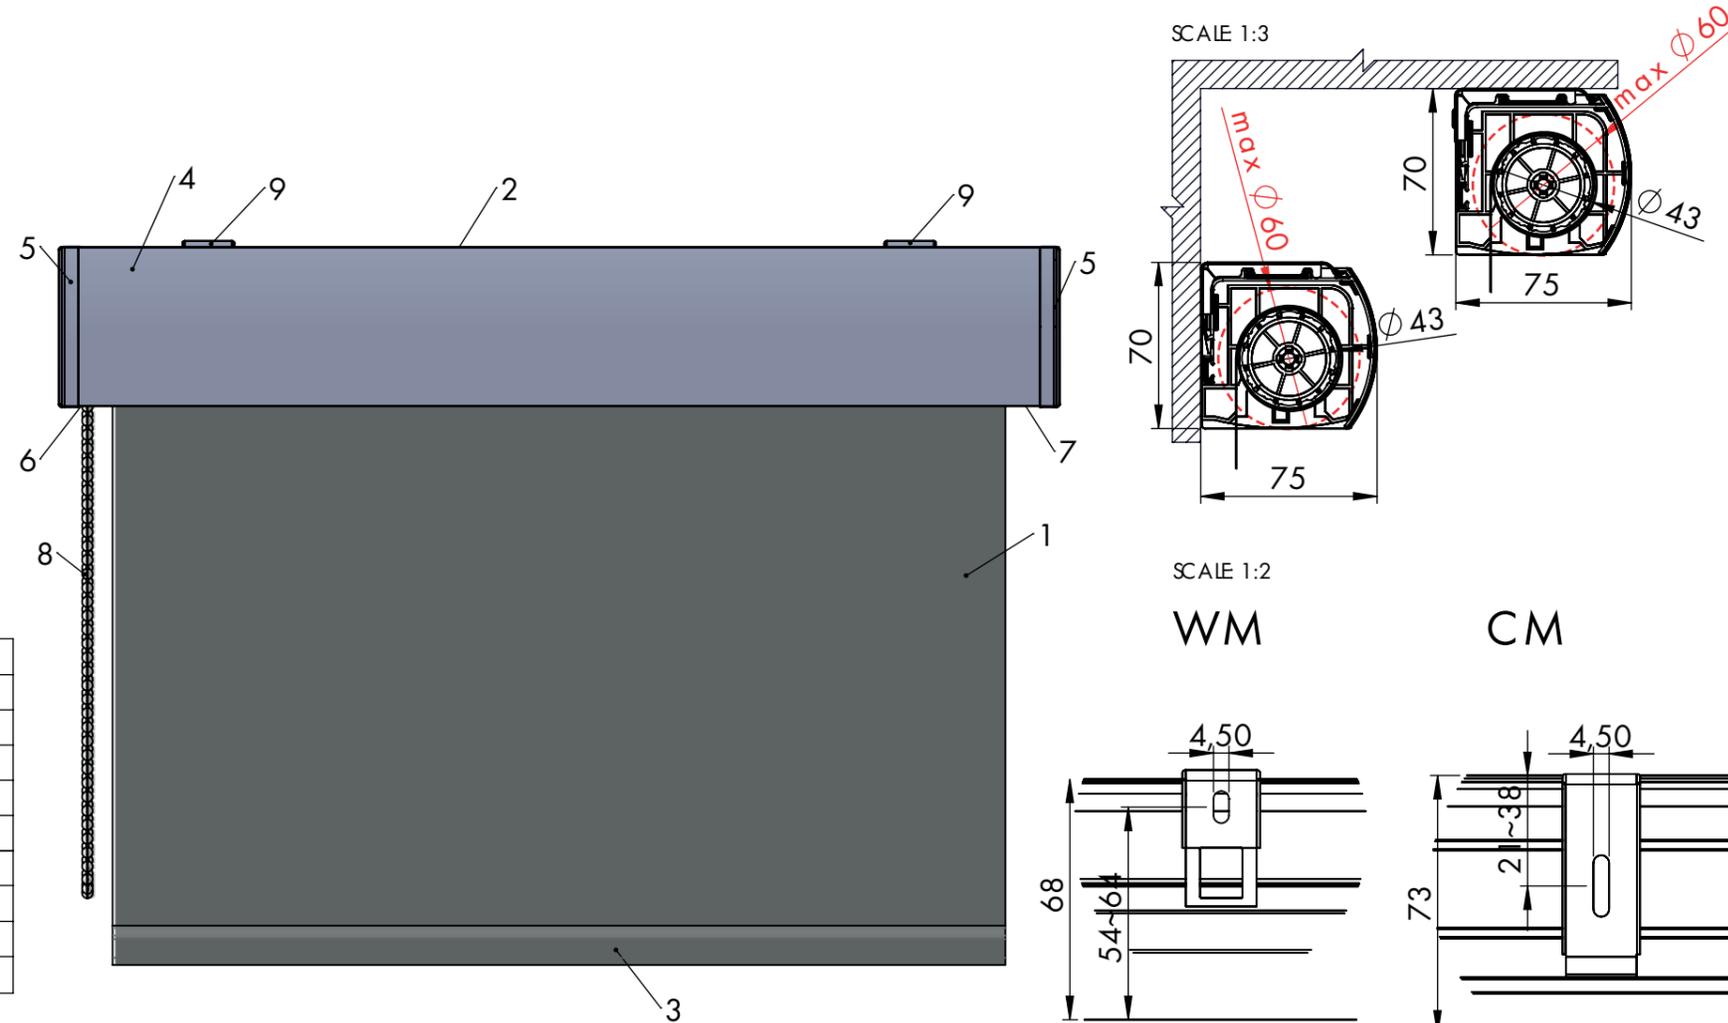

N	CODE	DESCRIPTION
1	F..	fabric
2	AX43	tube
3	FIN..	bottom bar
4	68R	round box
5	SC..	side cover
6	CHM..	chain mechanism
7	EC..	end cup
8	CH..	chain
9	MC..	mounting clip


PARAMETERS

Width	W (in mm)
Height	H (in mm)
Fabric	F..
Unwinding	A
Mounting	WM (wall) or CM (ceiling)
Control Side	L (left) or R (right)
Bottom bar	FIN..
Chain	CH..




FINB

SCALE 1:3

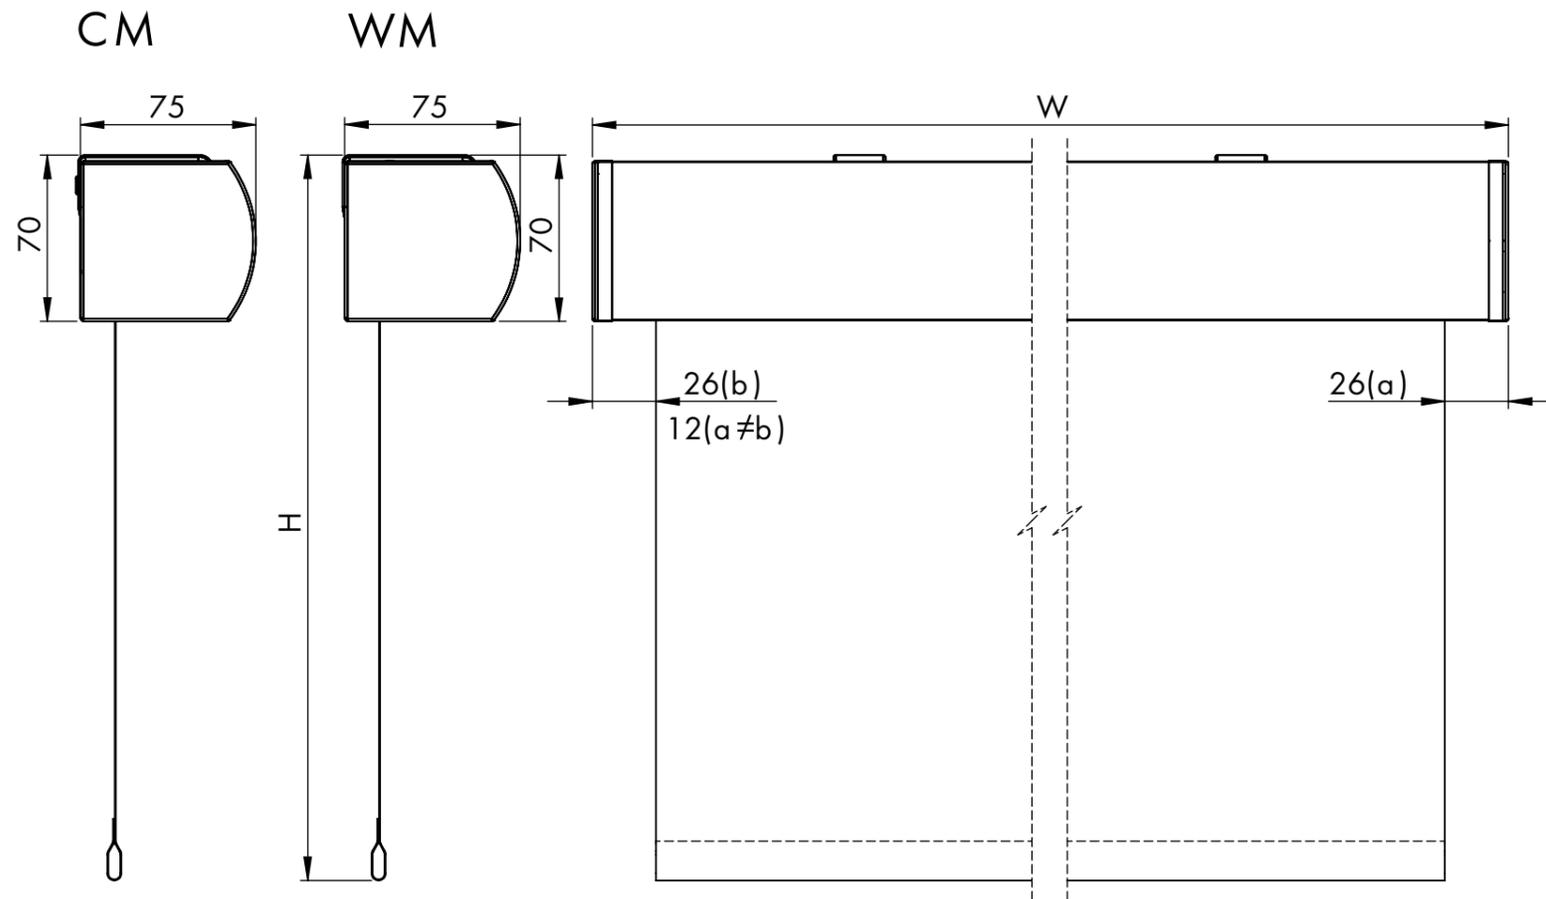


A

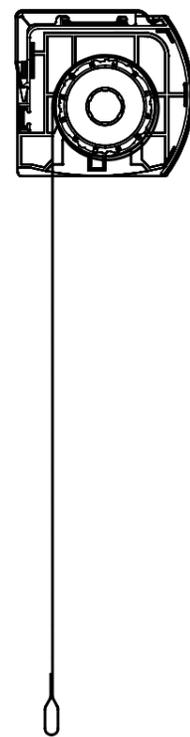


REN40 BOX 68

ACCUMOTOR SOMFY RTS

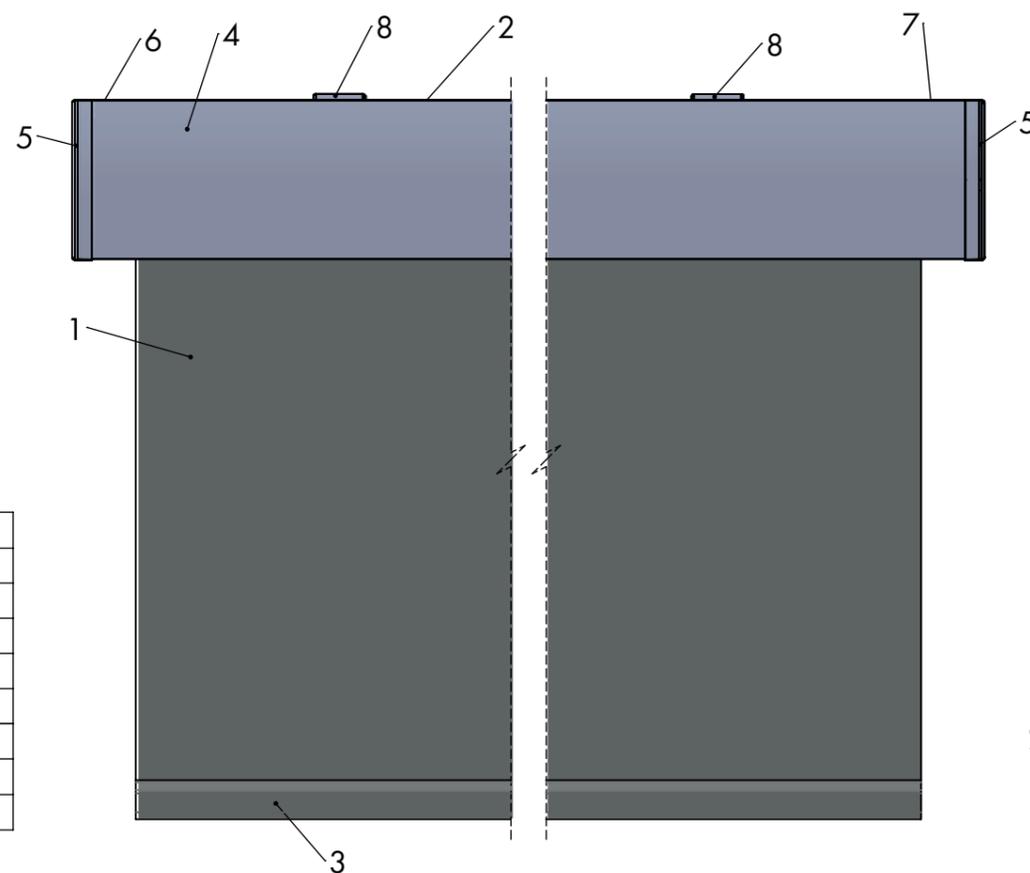


SCALE 1:3

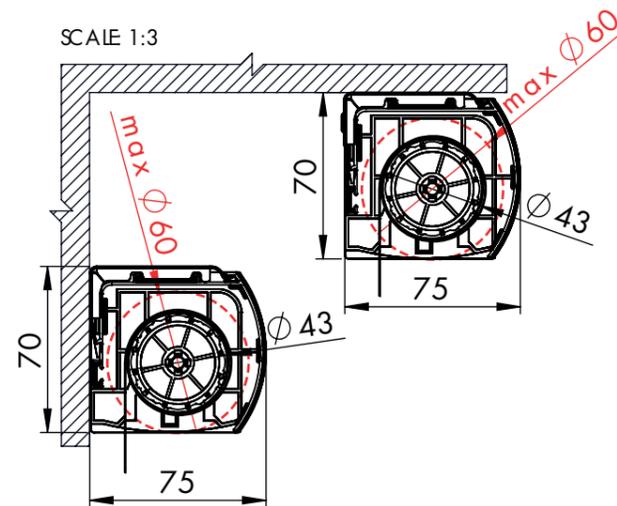


SCALE 1:2

WM



CM



PARAMETERS


Width	W (in mm)
Height	H (in mm)
Fabric	F..
Unwinding	A
Mounting	WM (wall) or CM (ceiling)
Control Side	L (left) or R (right)
Bottom bar	FN..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX43	tube
3	FN..	bottom bar
4	68R	round box
5	SC..	side cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MC..	mounting clip



FN..

SCALE 1:3


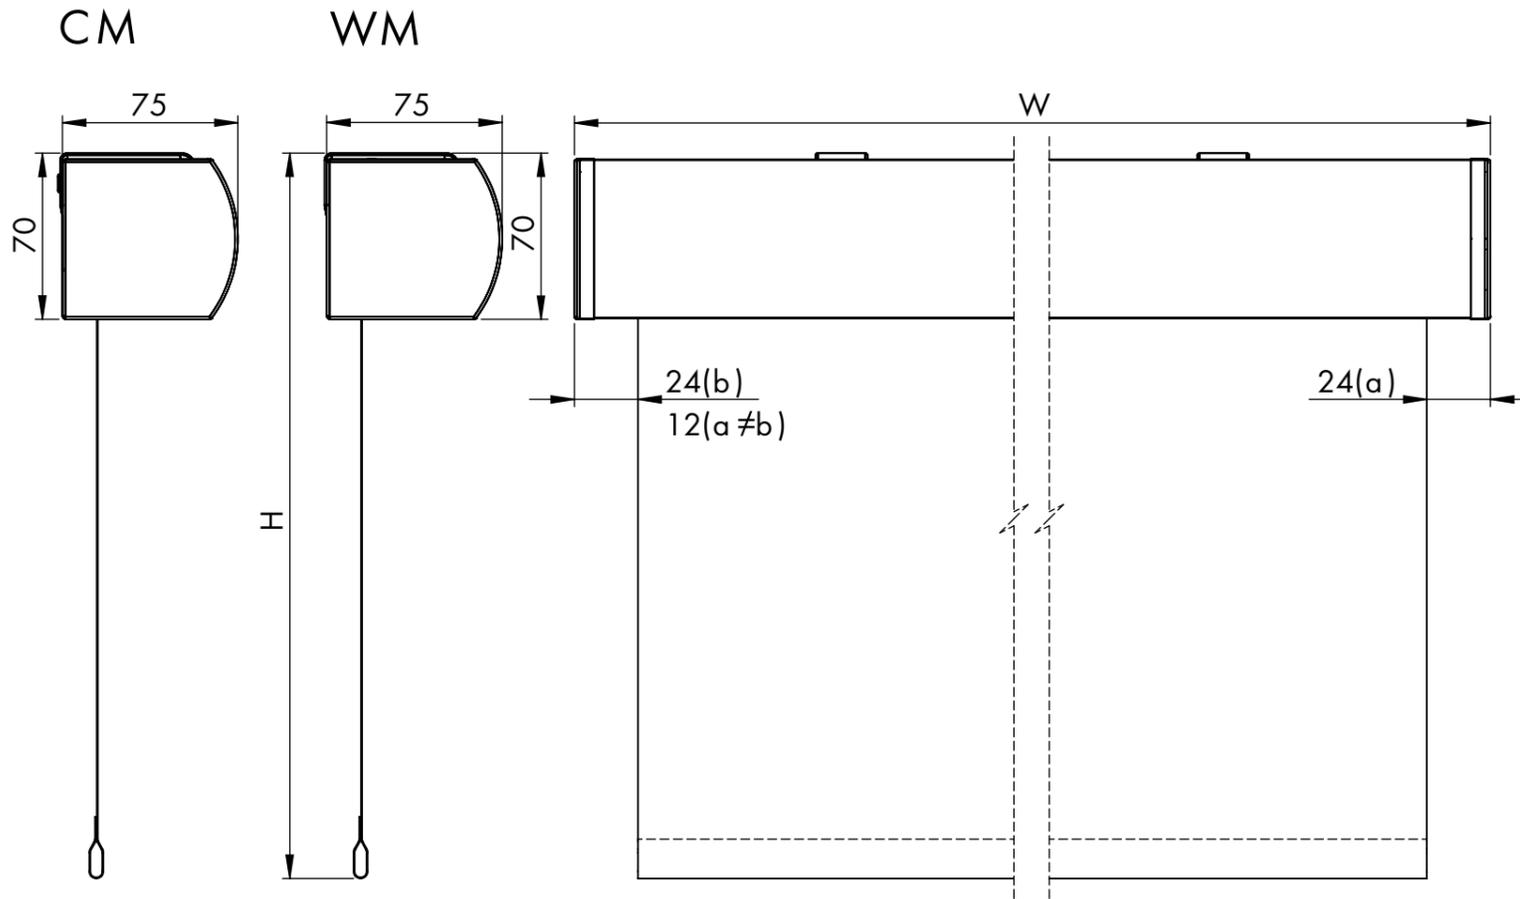


A




REN40 BOX 68

230V MOTOR SOMFY

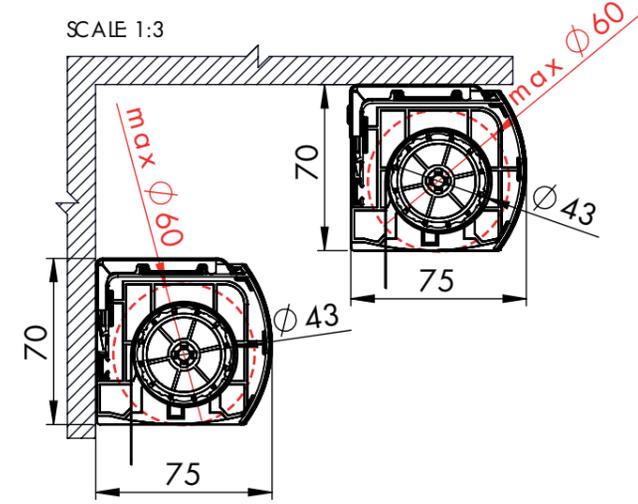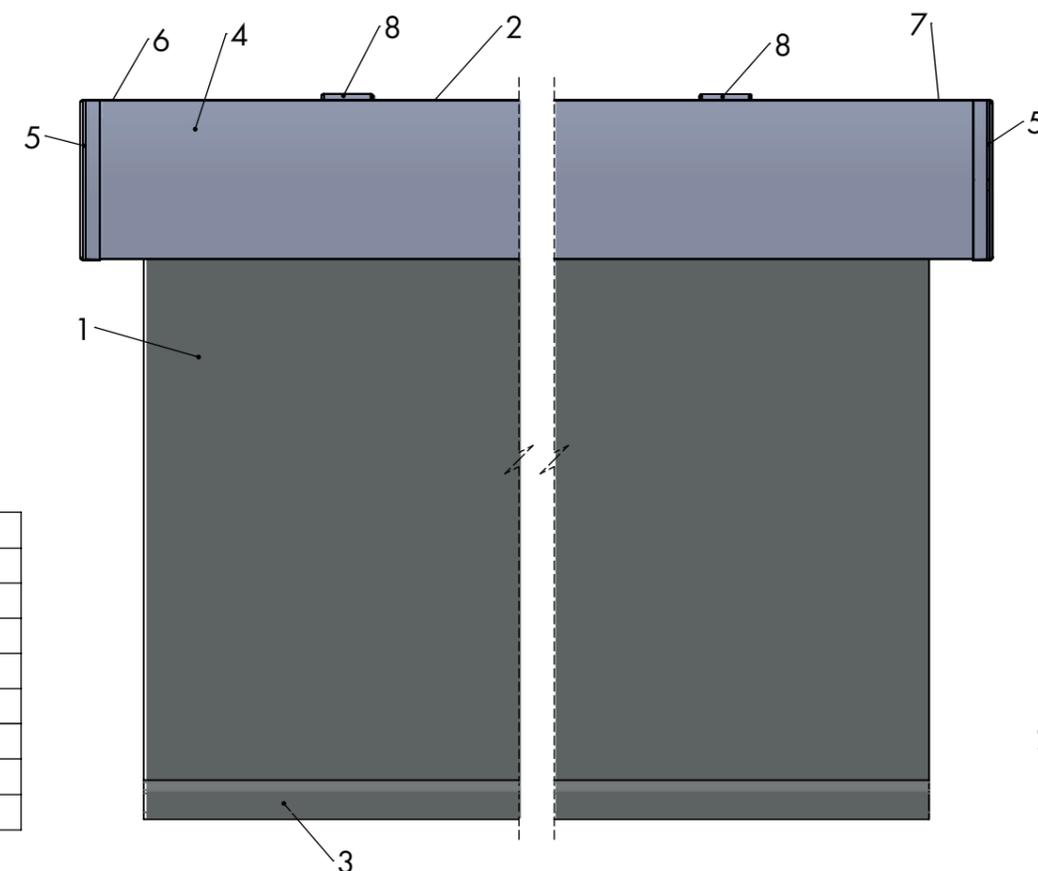

SCALE 1:2

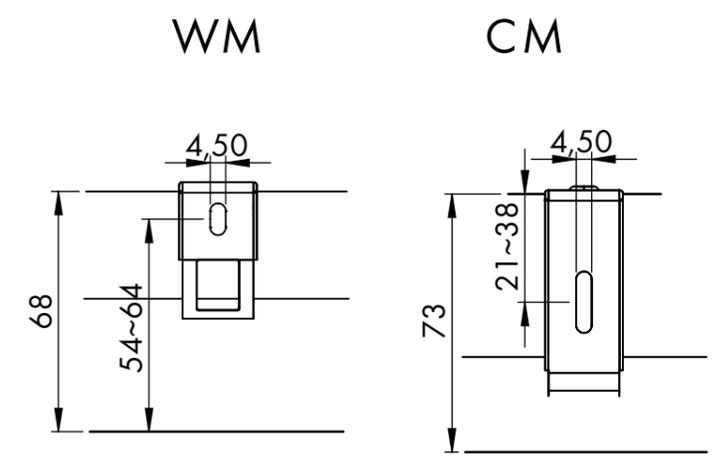

PARAMETERS




Width	W (in mm)
Height	H (in mm)
Fabric	F..
Unwinding	A
Mounting	WM (wall) or CM (ceiling)
Control Side	L (left) or R (right)
Bottom bar	FN..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX43	tube
3	FN..	bottom bar
4	68R	round box
5	SC..	side cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MC..	mounting clip





FN..


SCALE 1:3

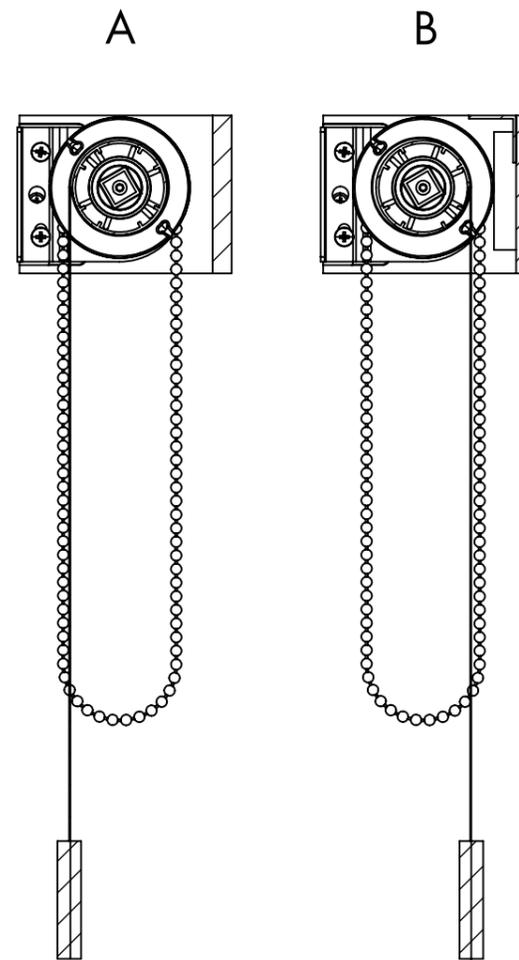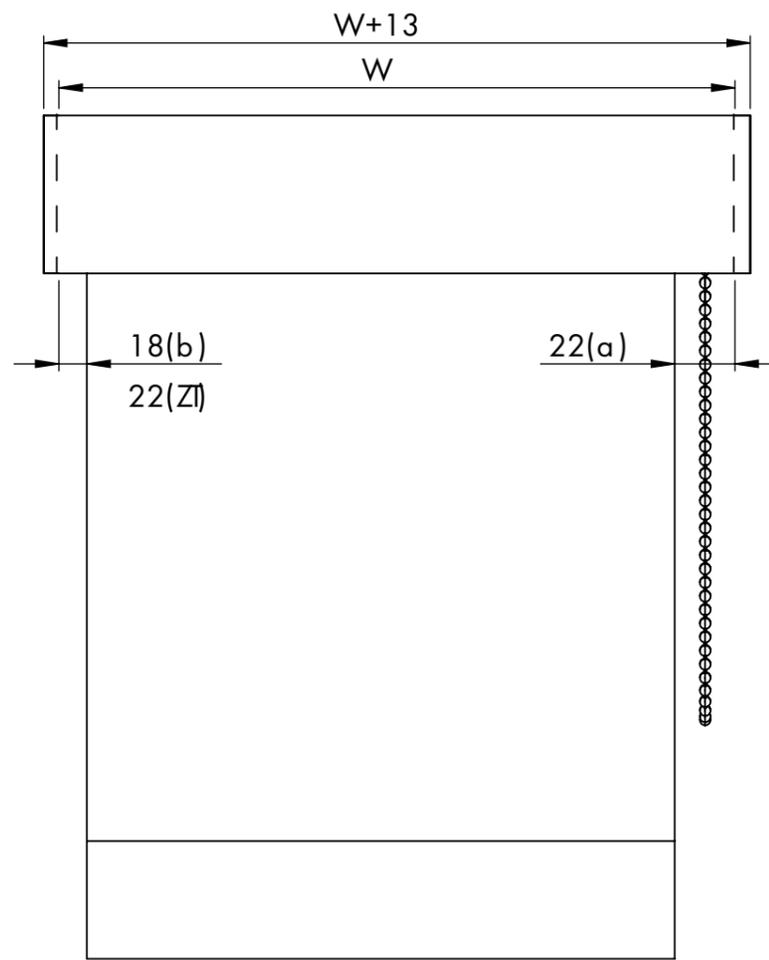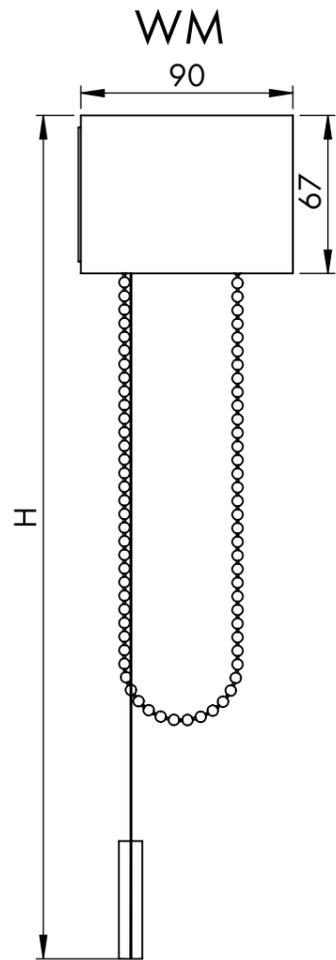


REN40 CHAIN

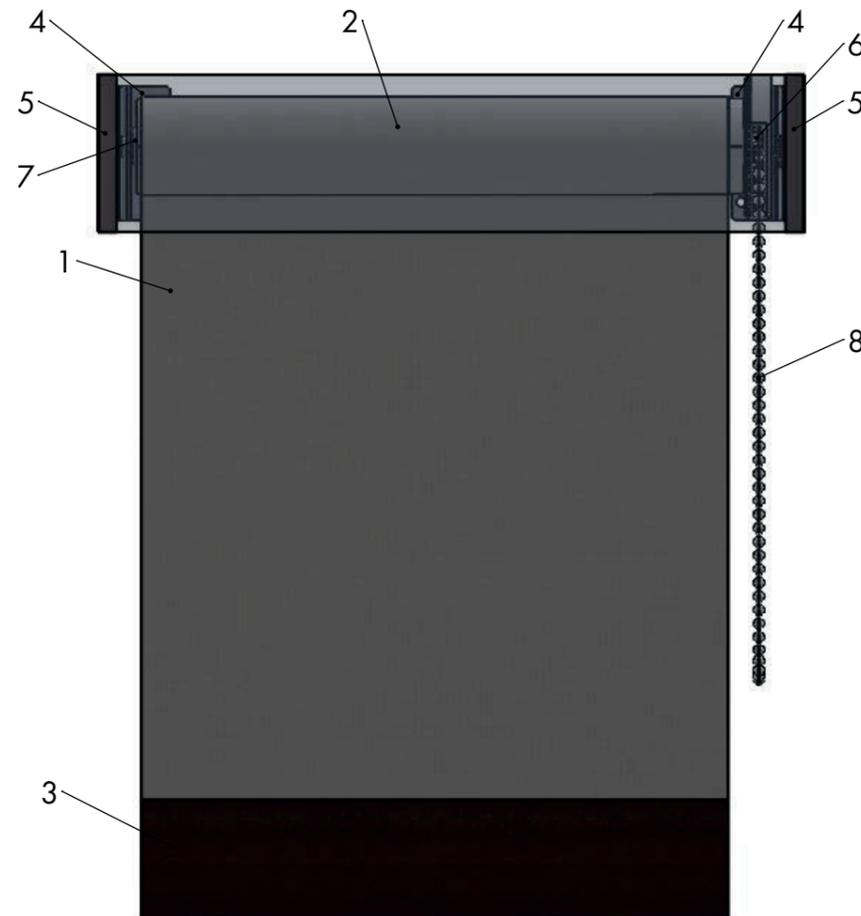

SCALE 1:3

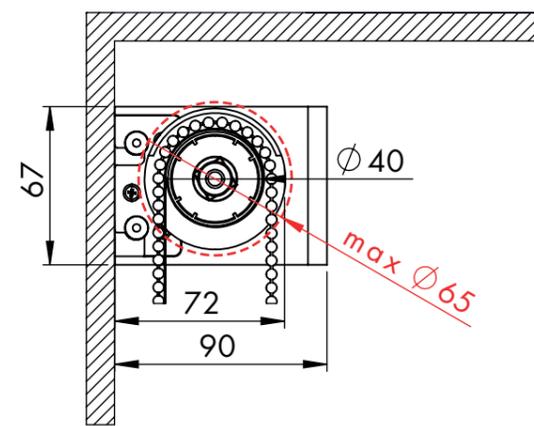

SCALE 1:2

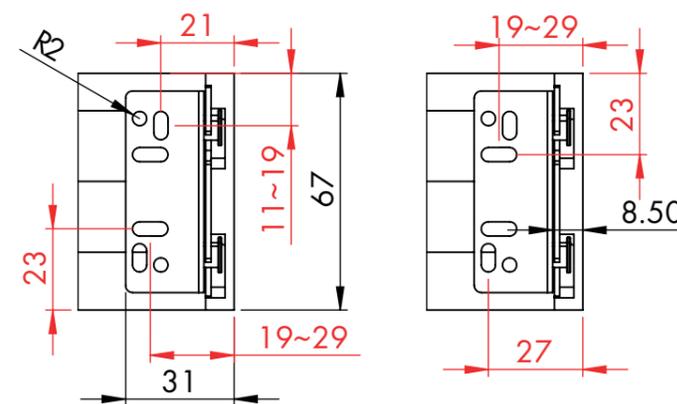




PARAMETERS

- Width W (in mm) (max 3400)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall)
- Control Sde L (left) or R (right)
- Bottom bar FN..


N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	CHM..	chain mechanism
7	EC..	end cup
8	CH..	chain




FBC 25

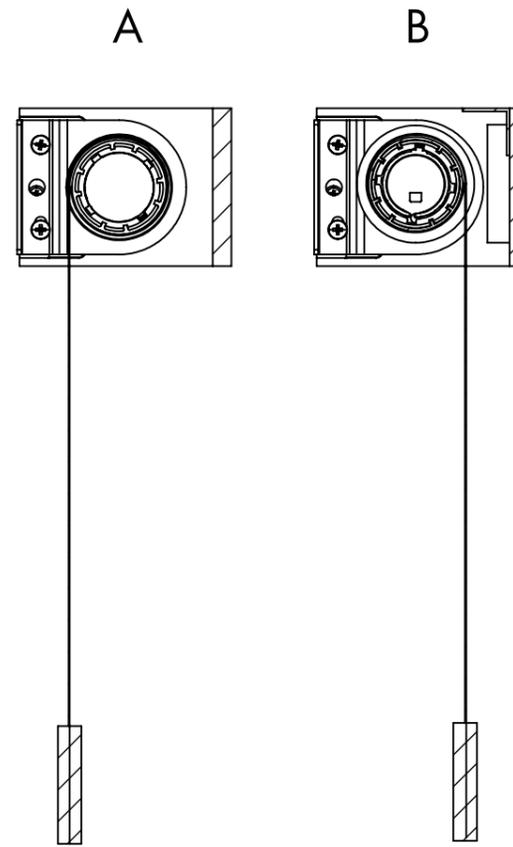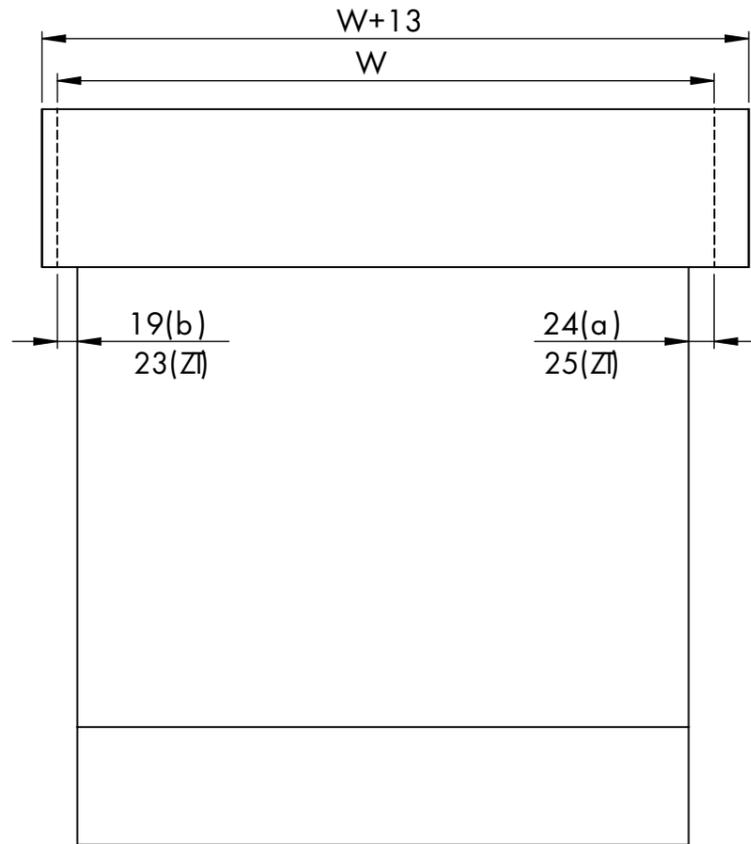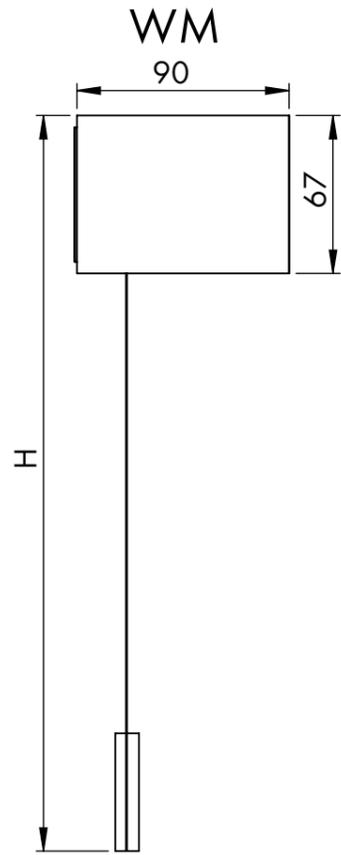


REN40 ACCUMOTOR SOMFY RTS

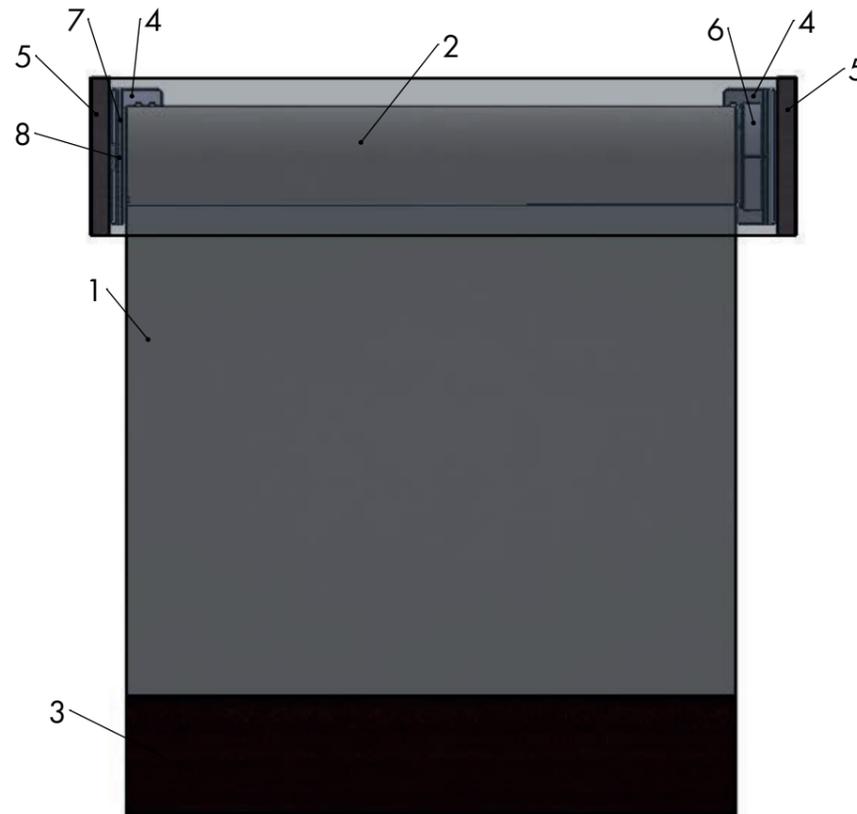

SCALE 1:3

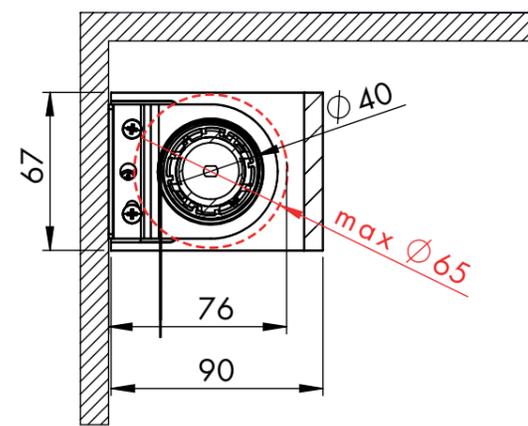

SCALE 1:2

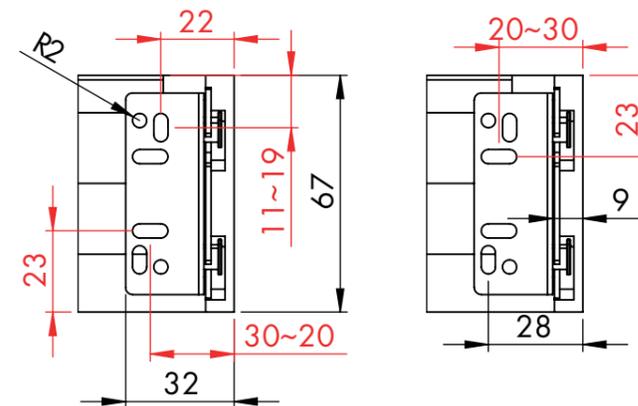




PARAMETERS

Width	W (in mm) (max 3400)
Height	H (in mm)
Fabric	F..
Unwinding	A or B (contra)
Mounting	WM (wall)
Control Sde	L (left) or R (right)
Bottom bar	FN..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT.	motor + adapter
7	EC..	end cup




FNW50

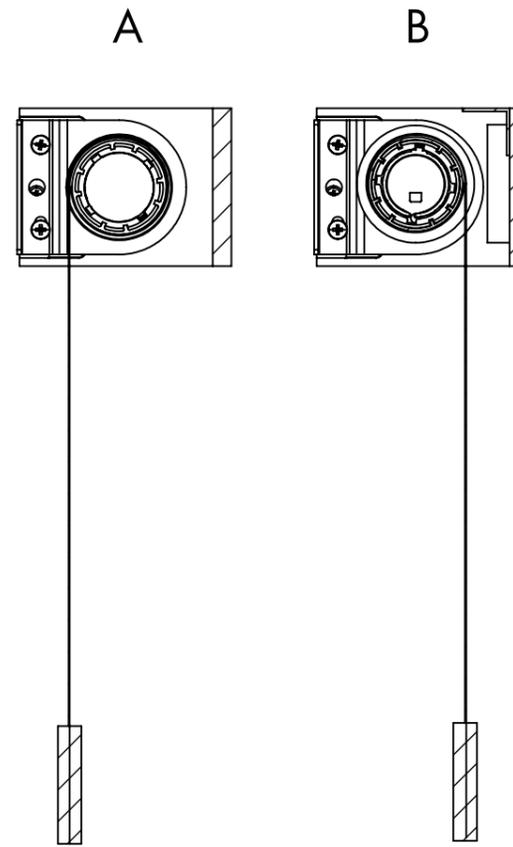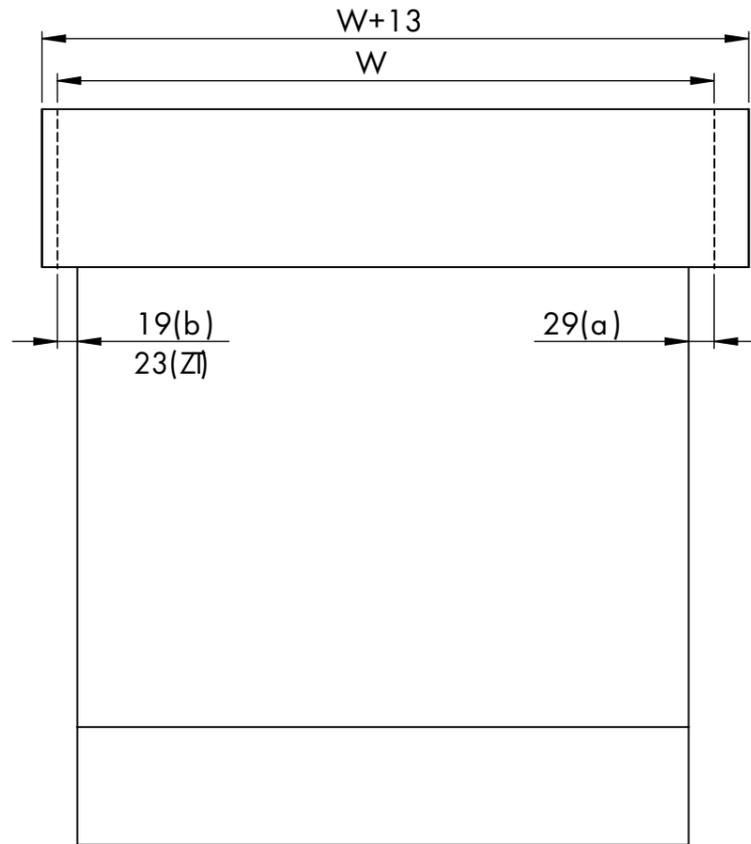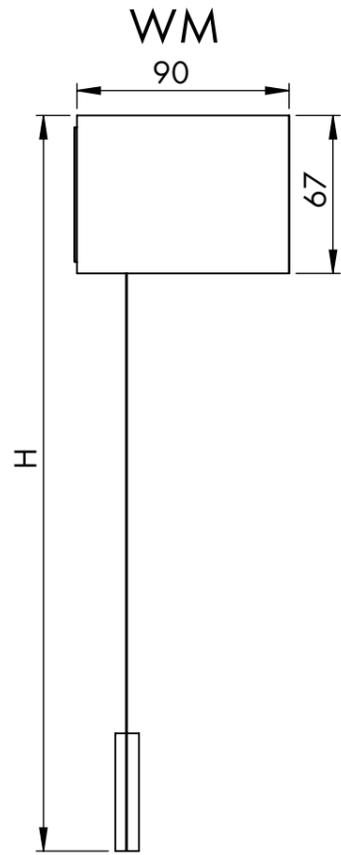


REN40


230 MOTOR SOMFY

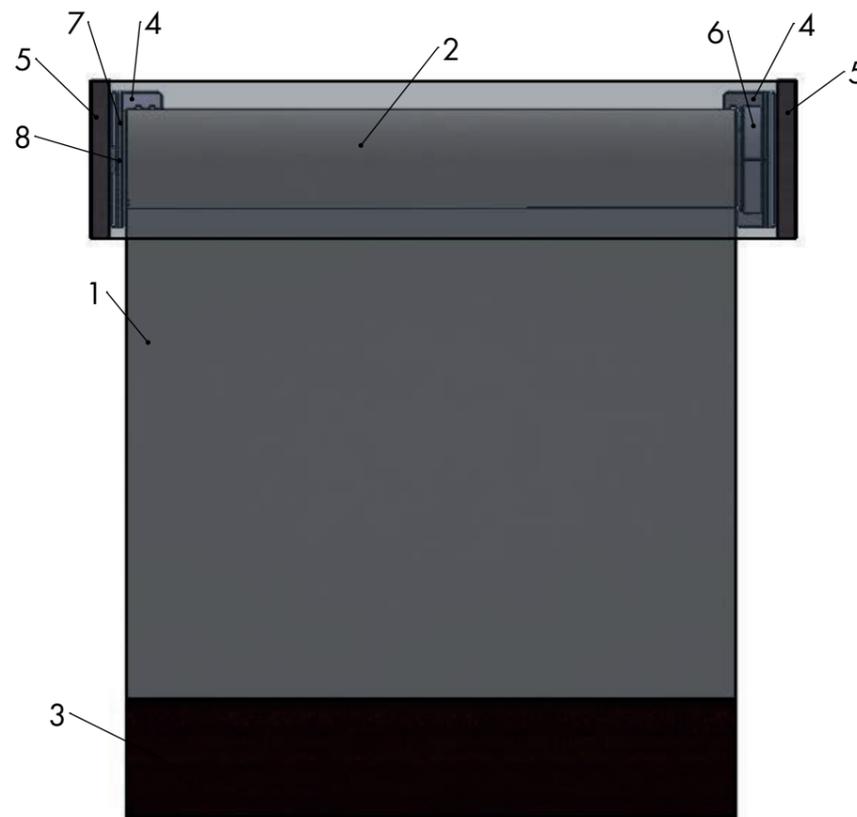

SCALE 1:3

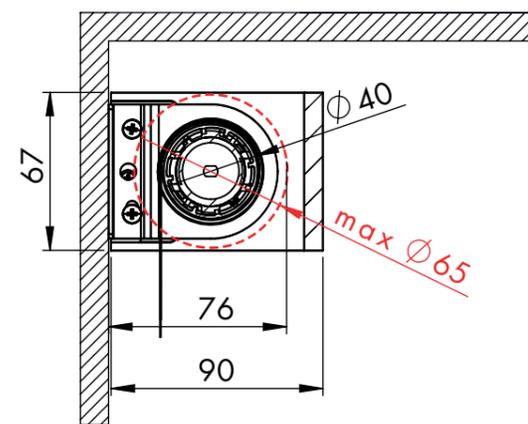

SCALE 1:2

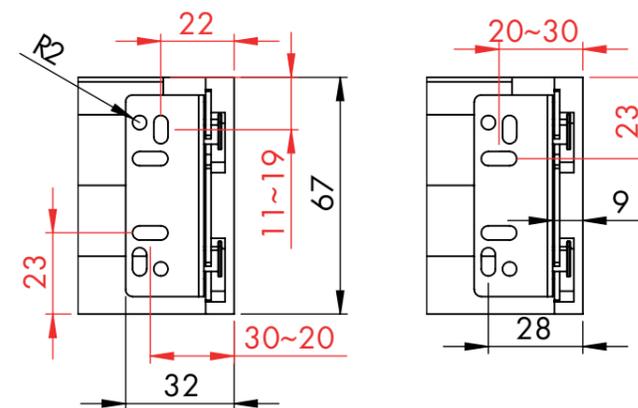

PARAMETERS




Width	W (in mm) (max 3400)
Height	H (in mm)
Fabric	F..
Unwinding	A or B (contra)
Mounting	WM (wall)
Control Sde	L (left) or R (right)
Bottom bar	FN..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX40	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT.	motor + adapter
7	EC..	end cup



FNW50

REN47

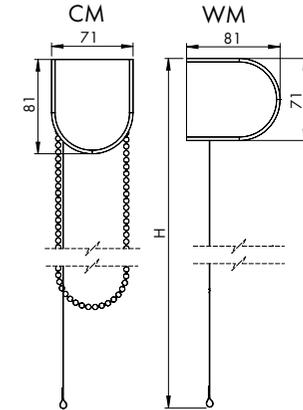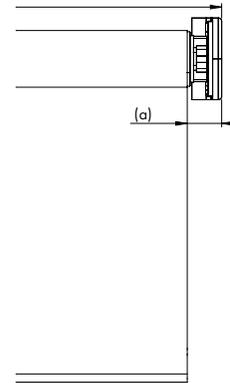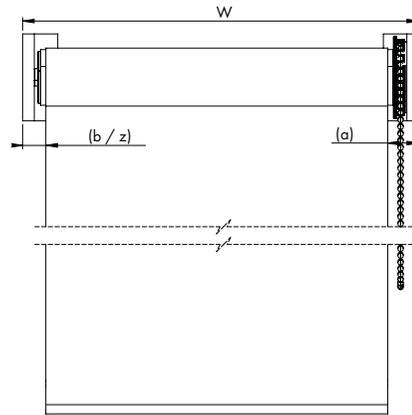

in mm

↔	MINIMUM WIDTH	600
	MAXIMUM WIDTH	2600
	MAXIMUM WIDTH (WITH ZOOMTECH®)	∞ 4000

BRACKET SIZE

DIAMETER OF THE TUBE without fabric

MAXIMAL DIAMETER OF THE TUBE with fabric → determines the maximum height for box 85 and 86 see page 74-75

CONTROL gap in mm control side (a) — non-control side (b) z = with ZOOMTECH®

CHAIN

600

2600

∞ 4000

81 x 71

47

74 *

CHAIN METAL

ACCU MOTOR

600

2600

∞ 5400

81 x 71 / 74 x 61

47

74 / 68 *

SOMFY ACCU RTS

230V MOTOR

600

2600

∞ 5400


81 x 71 / 74 x 61

47


74 / 68 *

SOMFY M
 SOMFY E
 SOMFY IO
 SOMFY RTS

ⁱ Maximum tolerance for mounting is -5mm / + 5mm. For ZOOMTECH -0/+5mm. The XC version is produced only with SOMFY E, RTS and IO motors

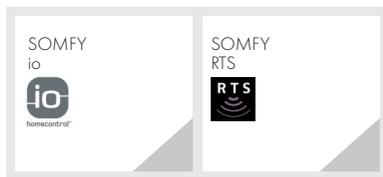

PARTLIST

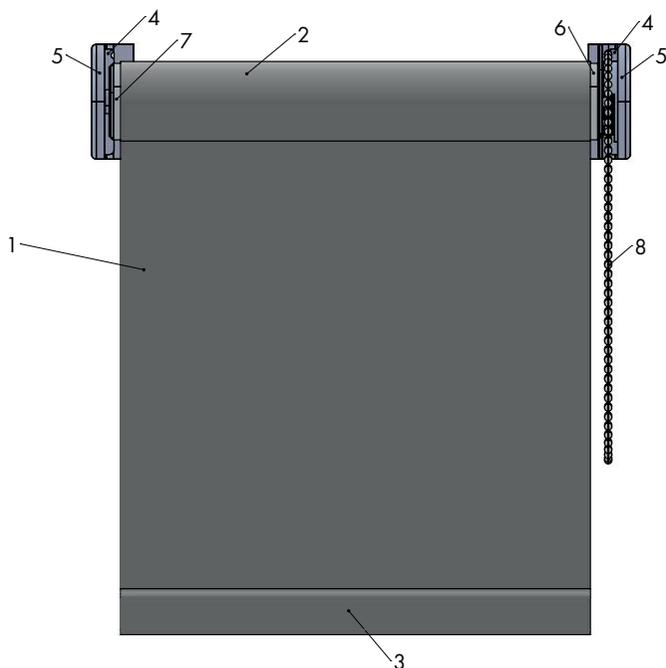

1	fabric
2	tube
3	bottom bar
4	bracket
5	bracket cover
6	chain mechanism
7	endcap
8	chain

LIMIT SETTINGS
As a rule, it is possible to reduce the end position of the roller blind by 10 mm.

VARIANTS

STANDARD COLOUR



P-CD..



DESIGN COVERS 65

Design bracket covers, fit to the metal brackets with integrated magnets. Made out of exclusive selected light wood.

P-XC..



XC INFINITY 70

Solid aluminium design brackets with integrated cable channel for hidden motorisation.

P-MP..



MOUNTING PROFILE 72

Snaps into a few clips placed in advance into the ceiling or on the wall. Possibility to easily take off the blind.

P-85B



BLIND BOX 75

NEW aluminium headbox with service opening from the bottom suitable for all types of mounting including recess mounting into the ceiling.

P-86R/S



BOX 86R/S 74

Closed aluminium head-box of 86mm with a square or round design.

P-CMD..



V-PROTECT 80

Telescopic bracket for suspended mounting to a higher ceiling. A perfect solution not only for roomdividers.

FINB..



hidden
Ø 16 01 04 10

P-FINQ..



wrapped
Ø 18 01 EX

P-FINR..



visible
Ø 18 01 EX 10

P-CSE..






SIDE GUIDING 1 MM




BOTTOM BAR

In the event that the width of the blind is ordered without ZOOMTECH technology and this technology is already recommended or mandatory here, possible deformation of the fabric, especially the so-called "V" effect, will not be the subject of a complaint.

SCALE: 1:3

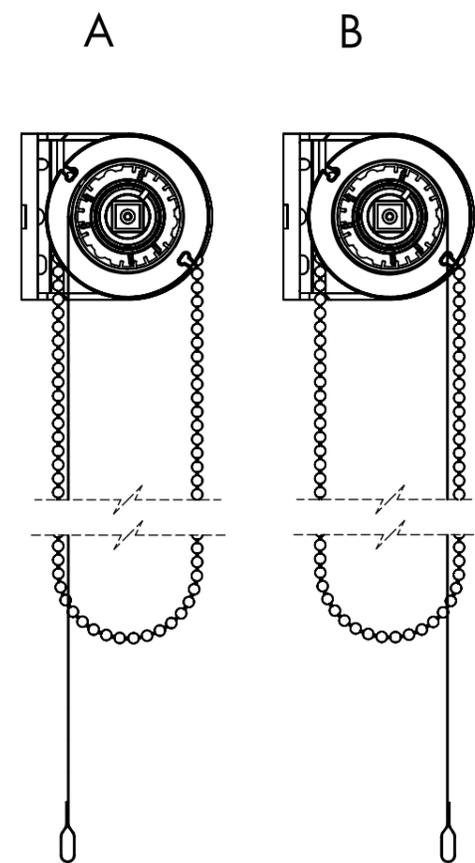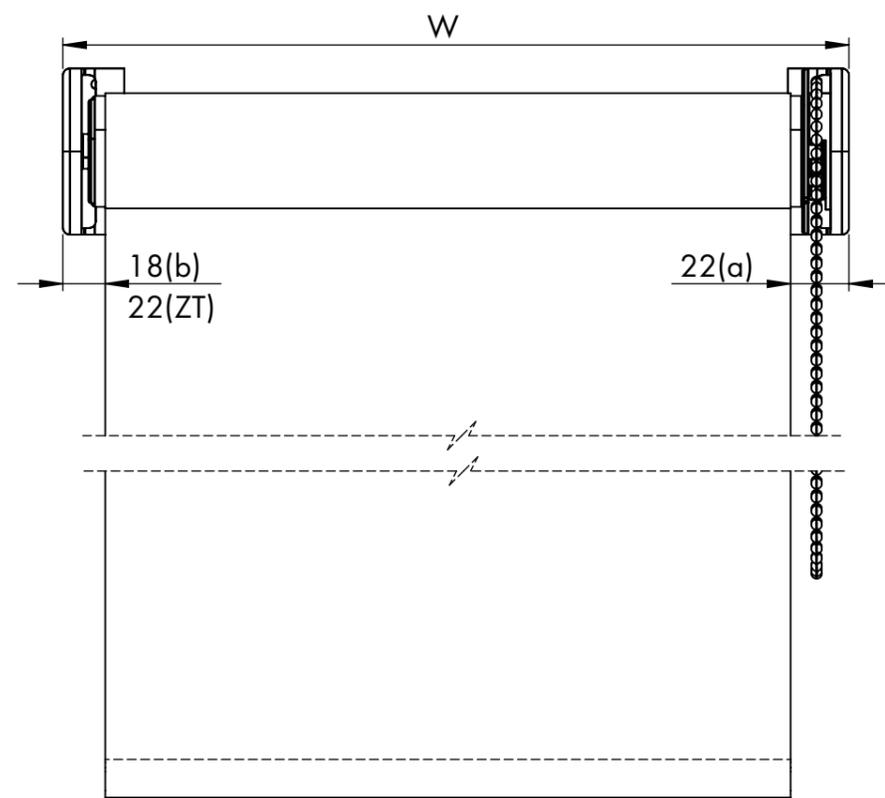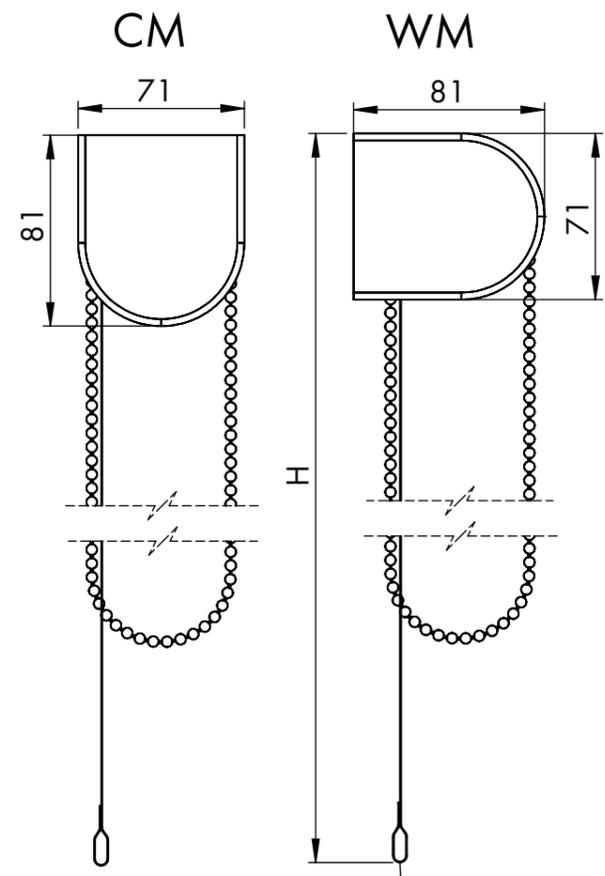

REN47 CHAIN

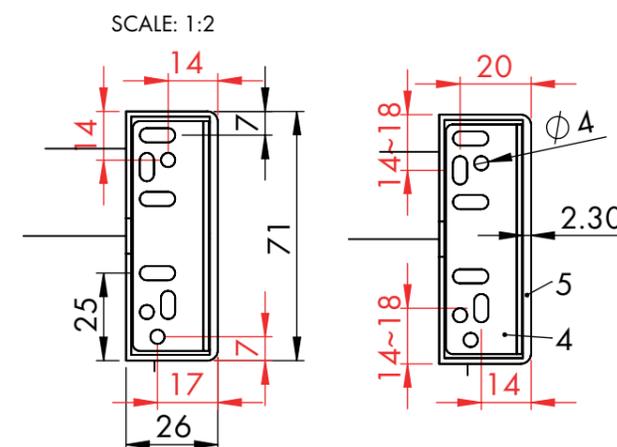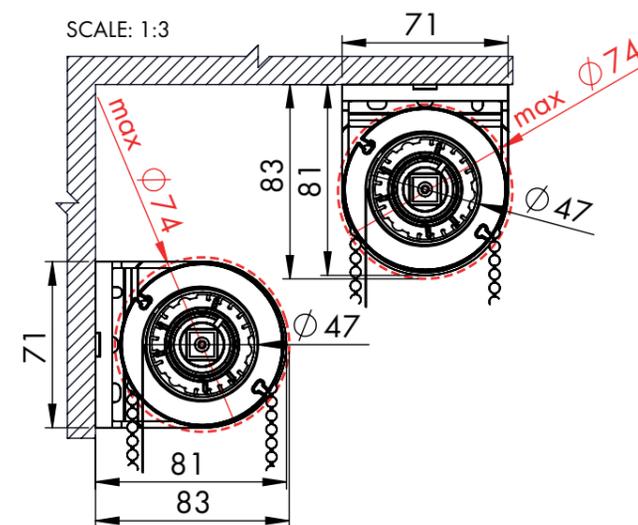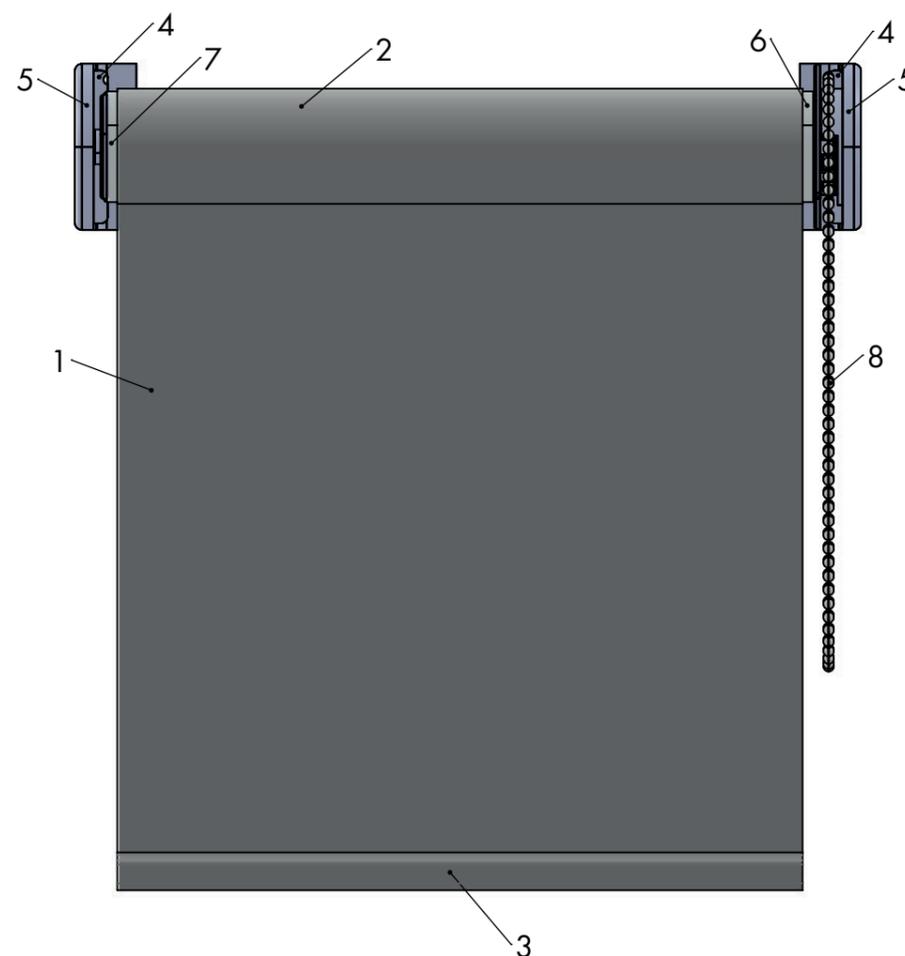

PARAMETERS



- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..
- Chain CH..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	CHM..	chain mechanism
7	EC..	end cup
8	CH..	chain






FINB


SCALE: 1:3

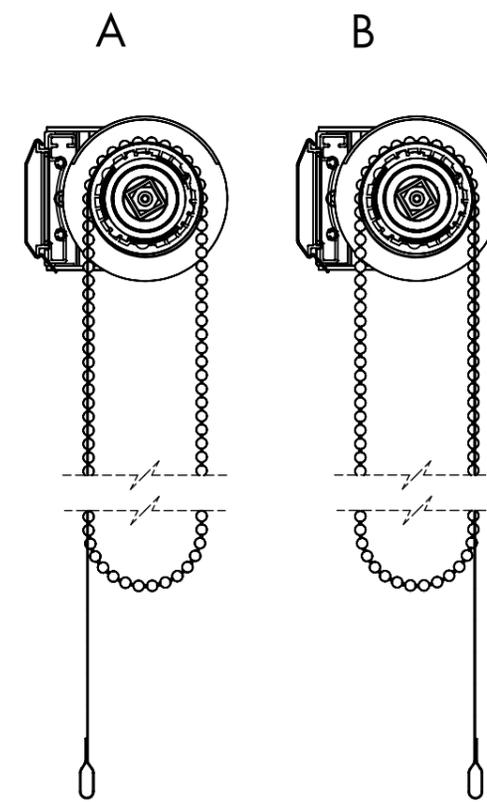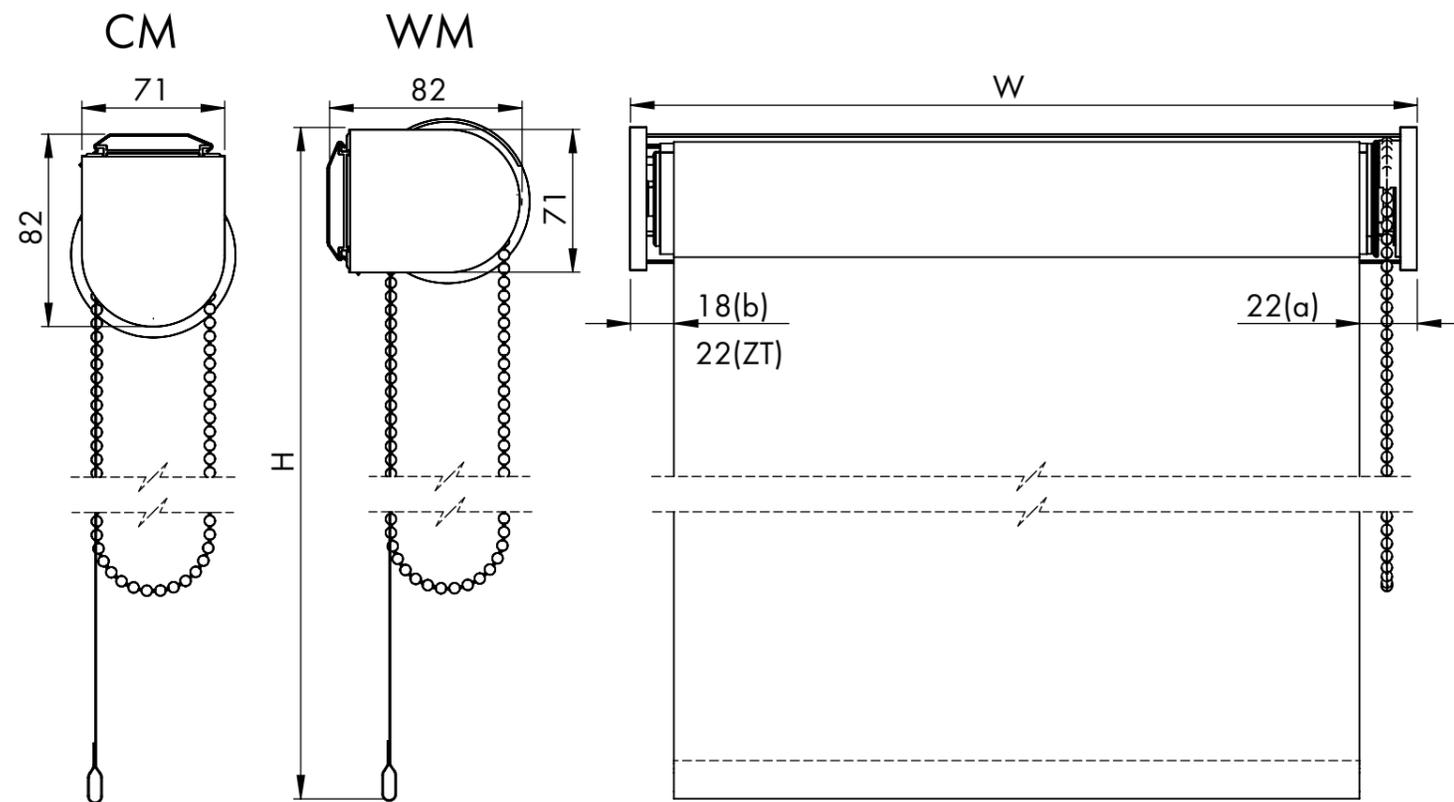

REN47 CHAIN

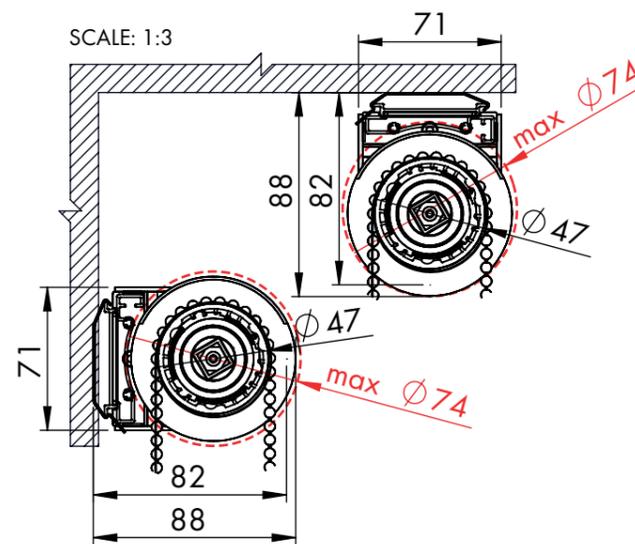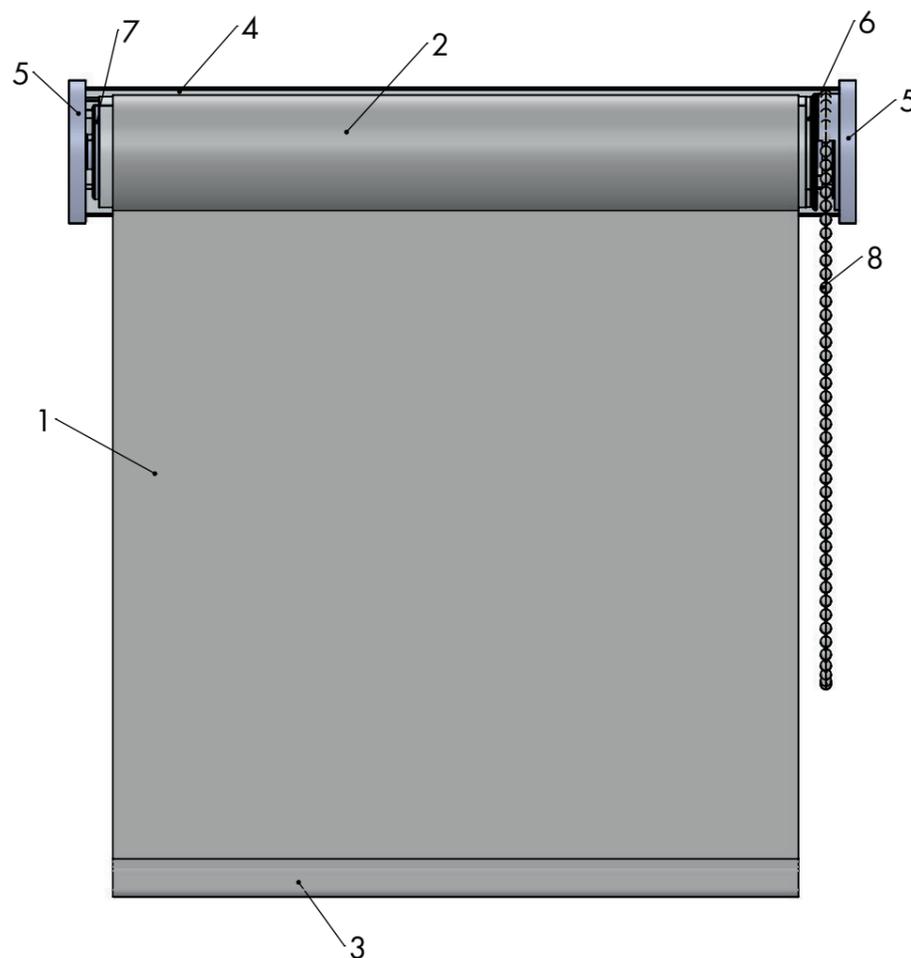

SCALE: 1:2



PARAMETERS



Width	W (in mm)
Height	H (in mm)
Fabric	F..
Unwinding	A or B (contra)
Mounting	WM (wall) or CM (ceiling)
Control Side	L (left) or R (right)
Bottom bar	FIN..
Chain	CH..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	CHM..	chain mechanism
7	EC..	end cup
8	CH..	chain






FINB

SCALE: 1:3

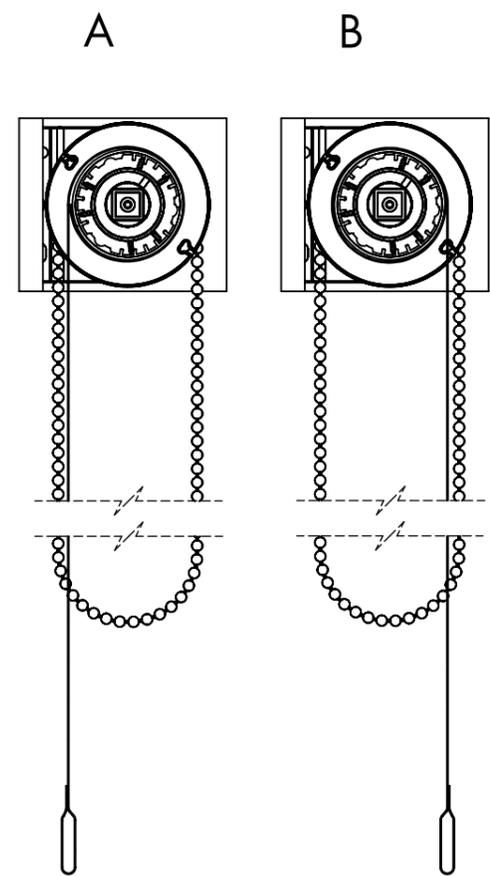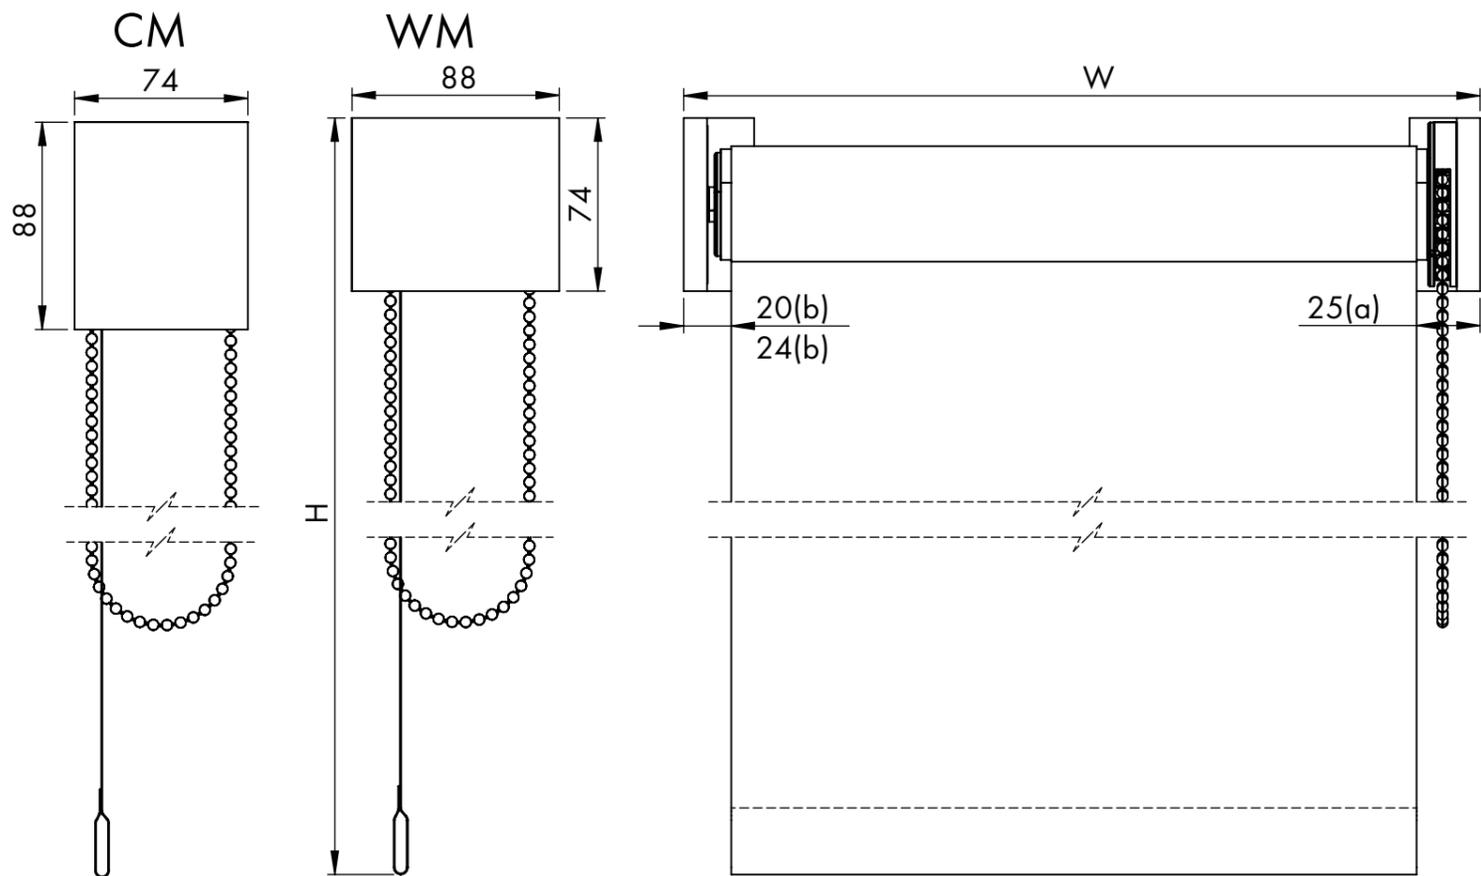

REN47 CHAIN

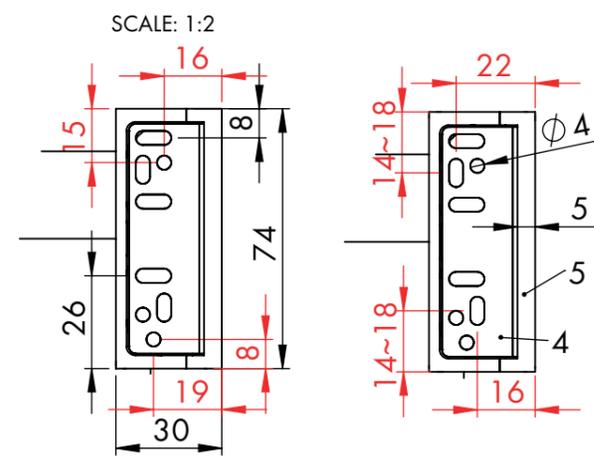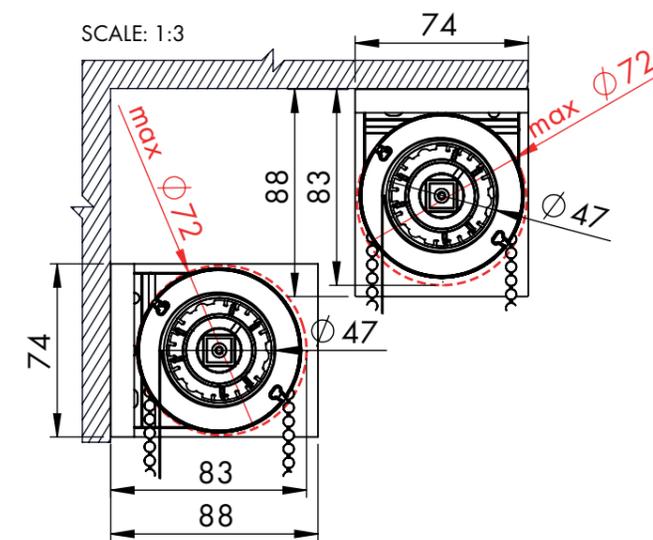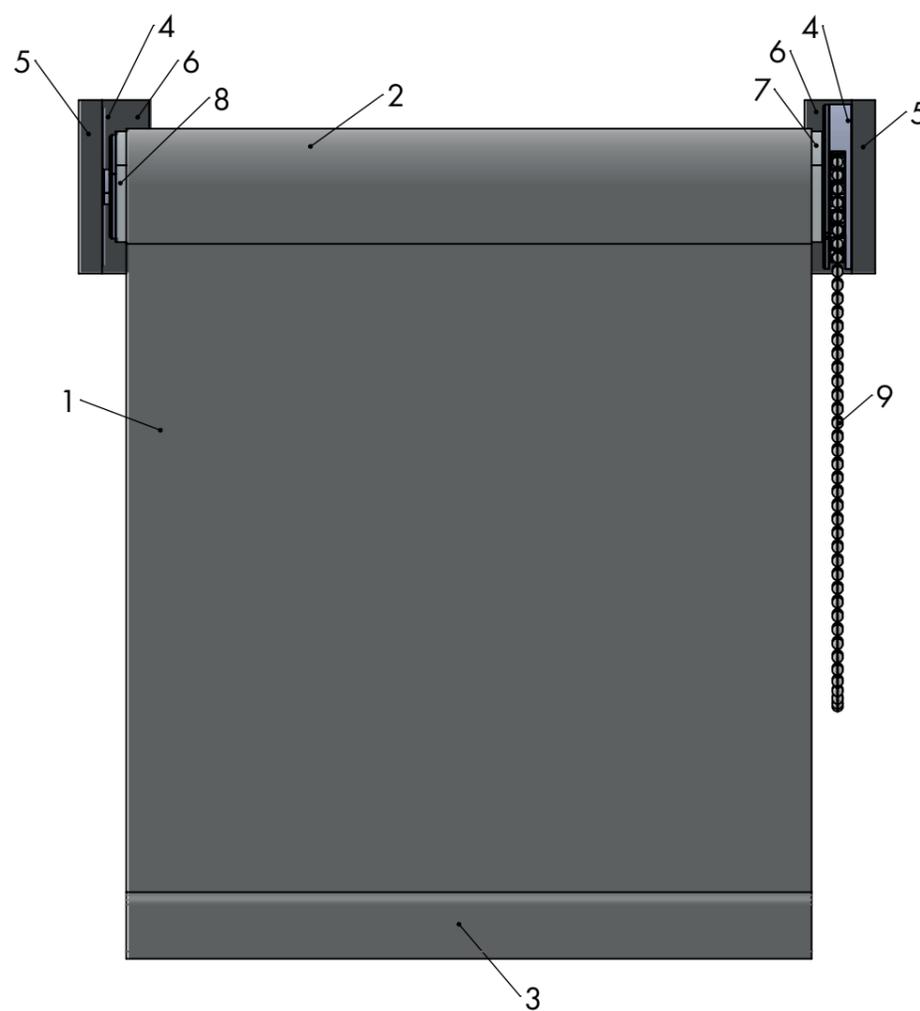



N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	SC..	screw cover
7	CHM..	chain mechanism
8	EC..	end cup
9	CH..	chain

PARAMETERS


- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..
- Chain CH..




FINB

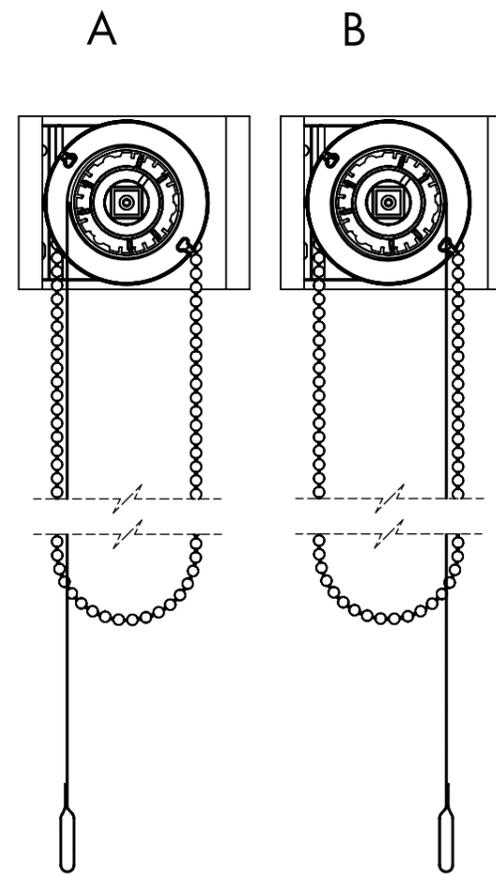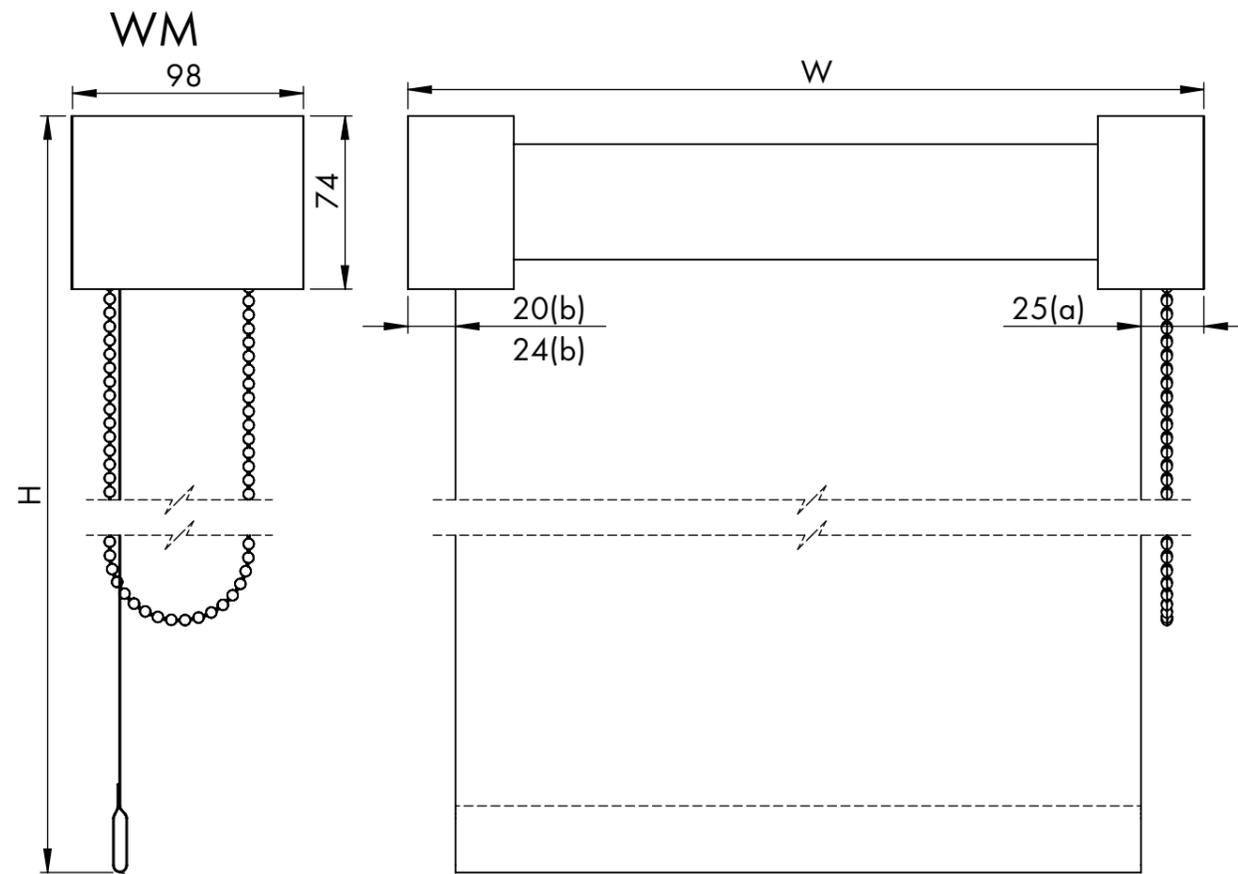


REN47 CHAIN

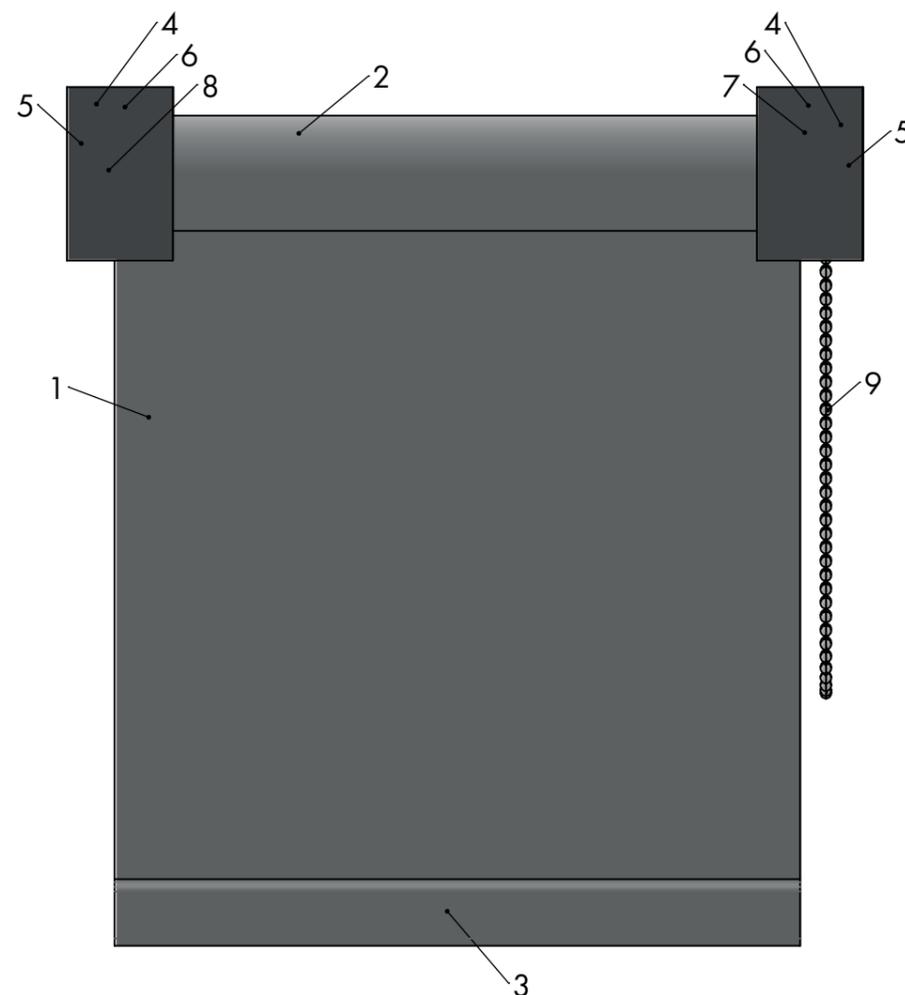

SCALE: 1:3

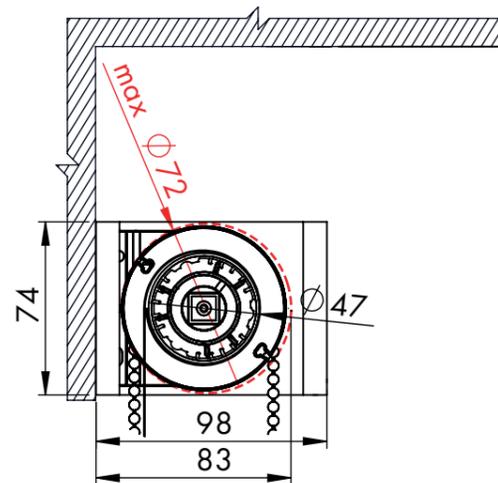

SCALE: 1:2

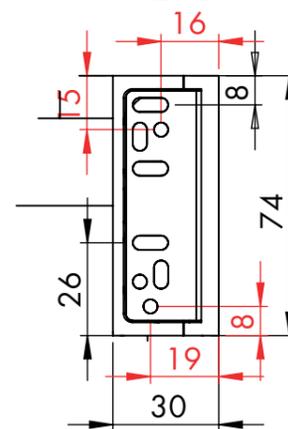

PARAMETERS



- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall)
- Control Side L (left) or R (right)
- Bottom bar FIN..
- Chain CH..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	SC..	screw cover
7	CHM..	chain mechanism
8	EC..	end cup
9	CH..	chain






FINB

SCALE: 1:3

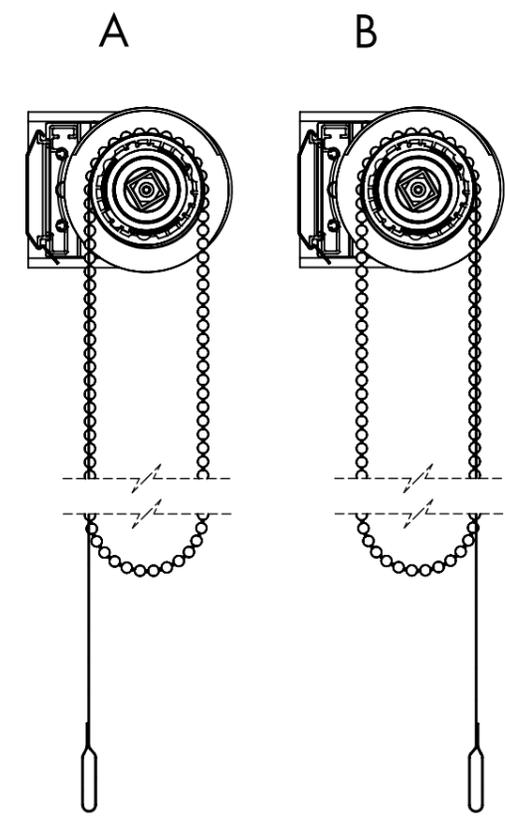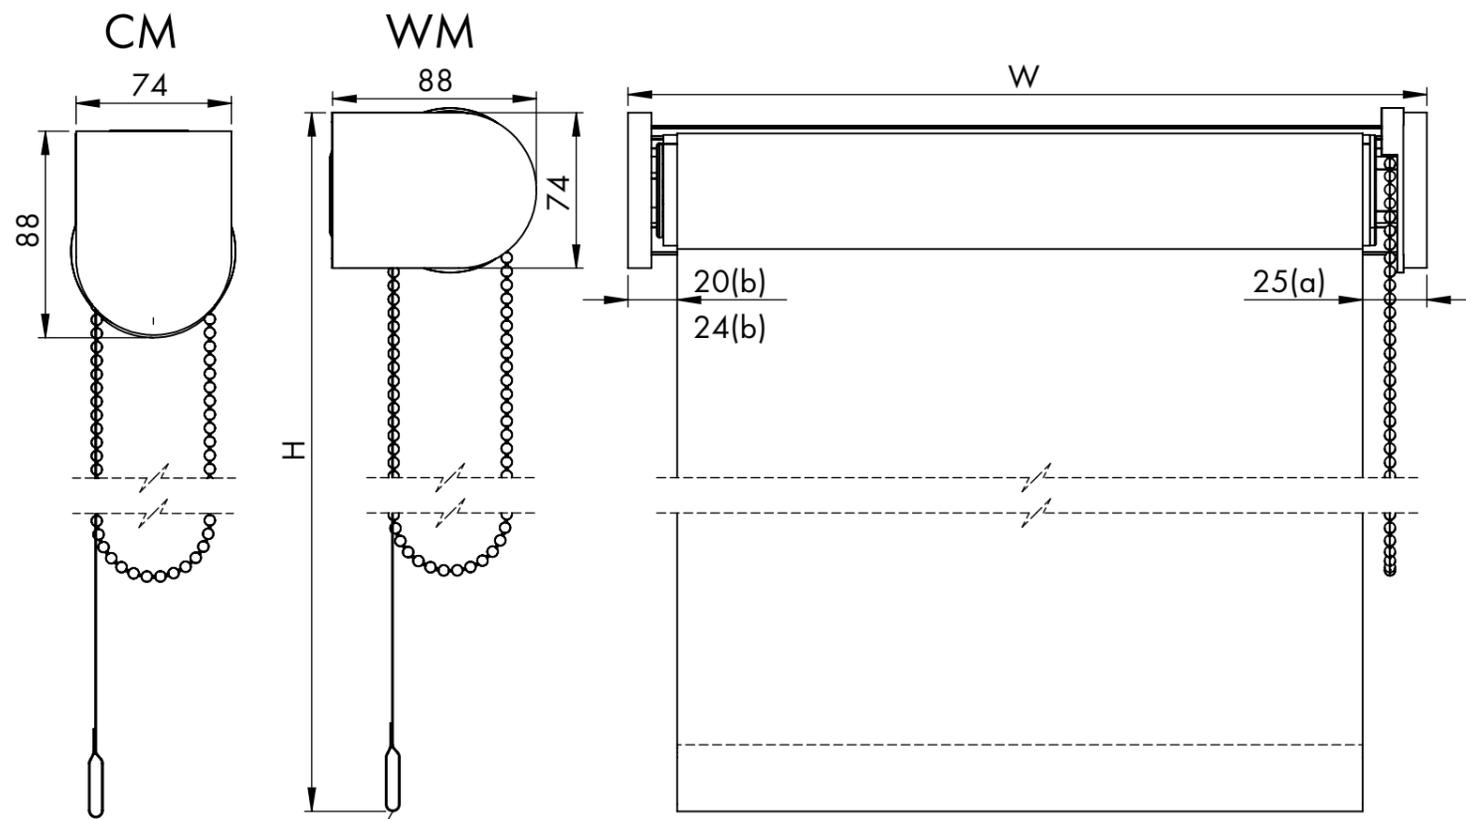

REN47 CHAIN

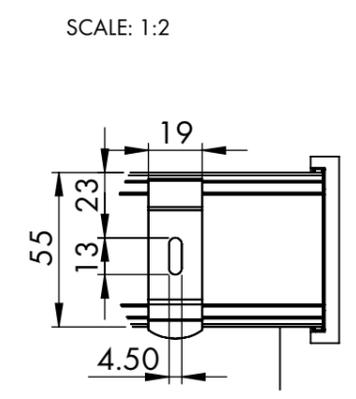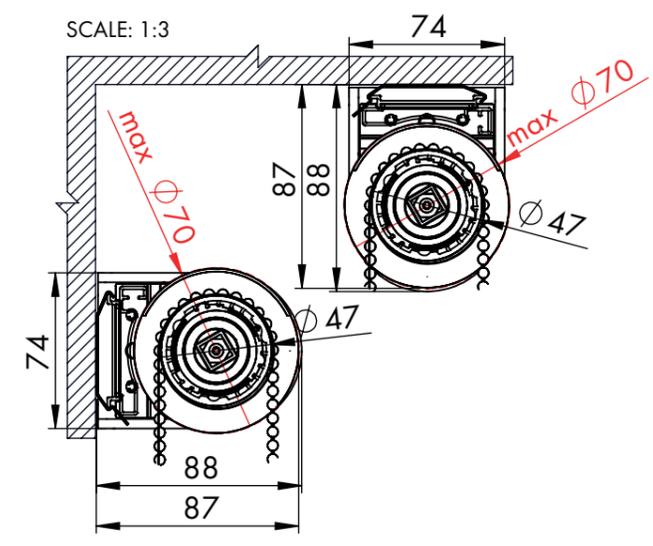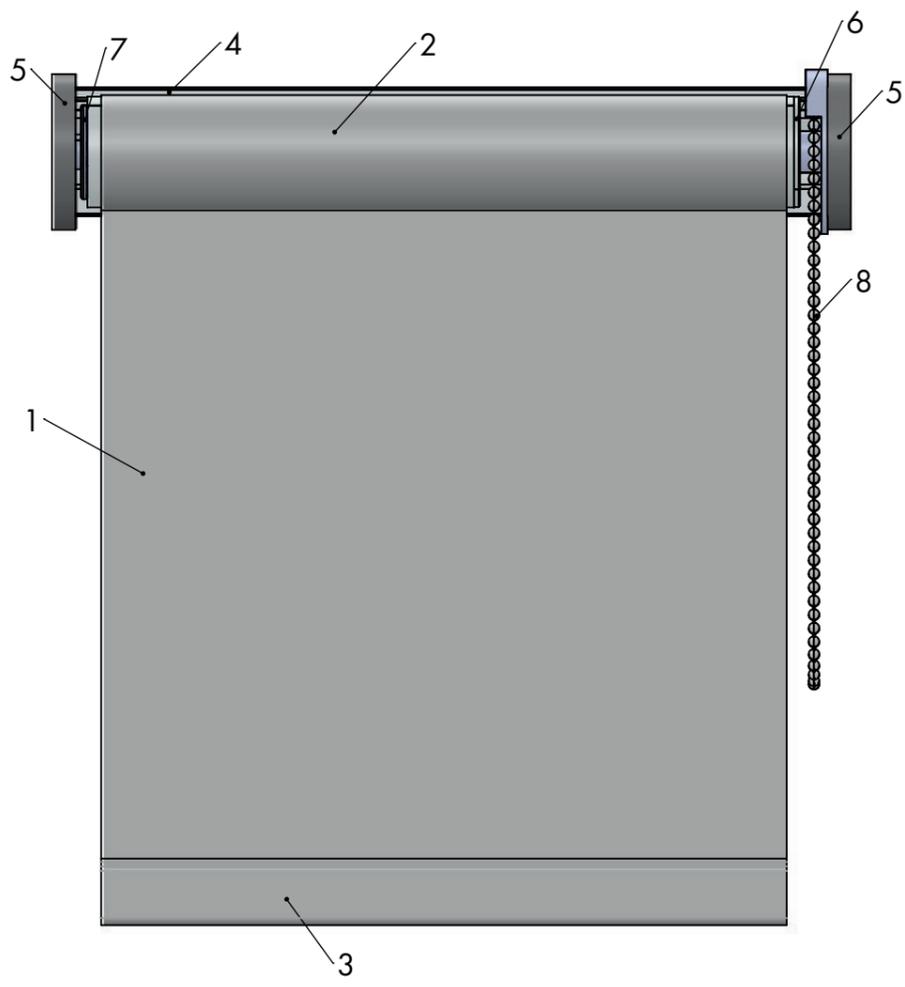

PARAMETERS



Width	W (in mm)
Height	H (in mm)
Fabric	F..
Unwinding	A or B (contra)
Mounting	WM (wall) or CM (ceiling)
Control Side	L (left) or R (right)
Bottom bar	FIN..
Chain	CH..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	CHM..	chain mechanism
7	EC..	end cup
8	CH..	chain






FINC25

SCALE: 1:3

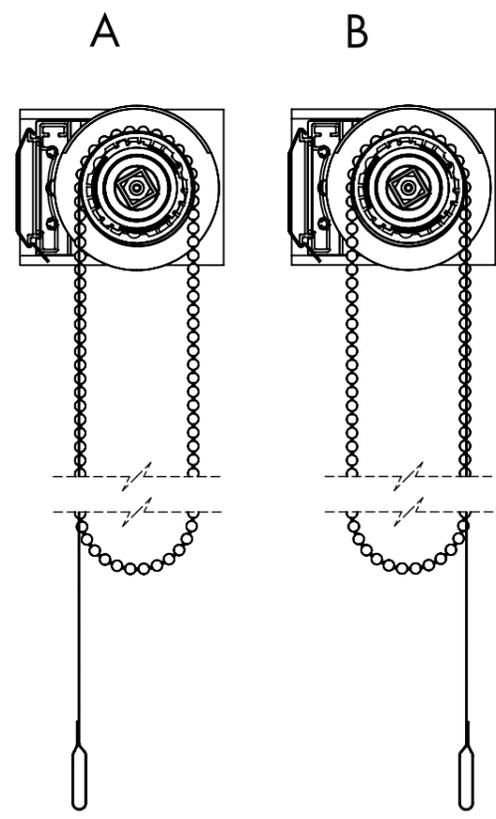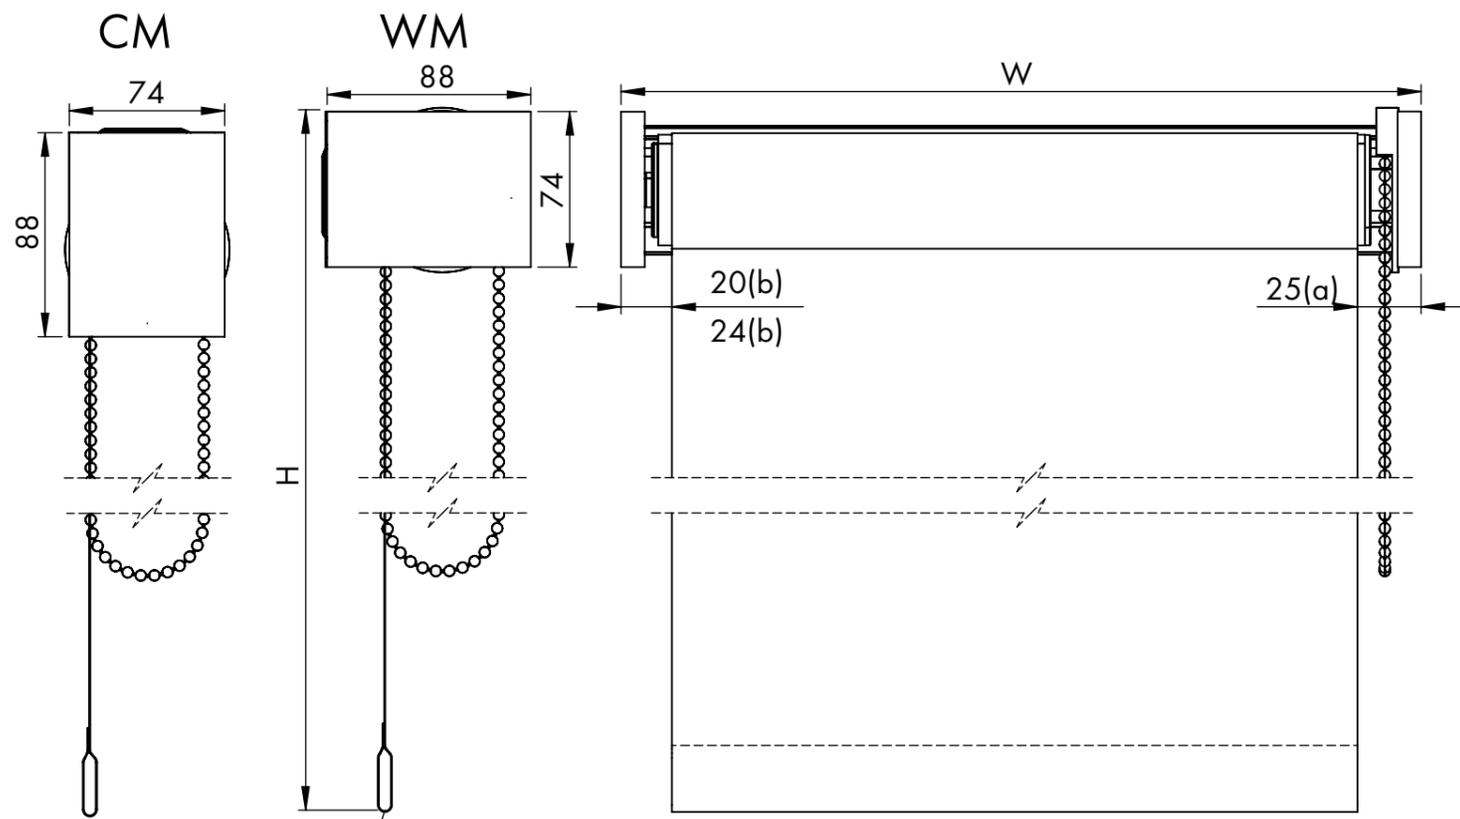

REN47 CHAIN

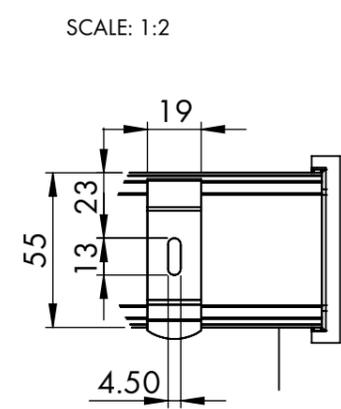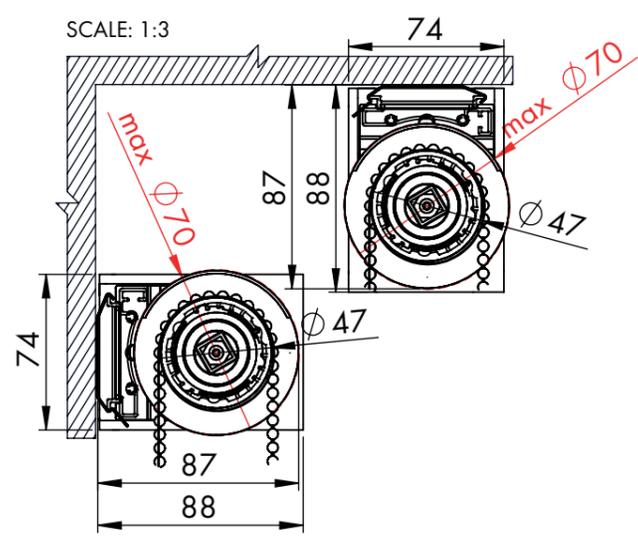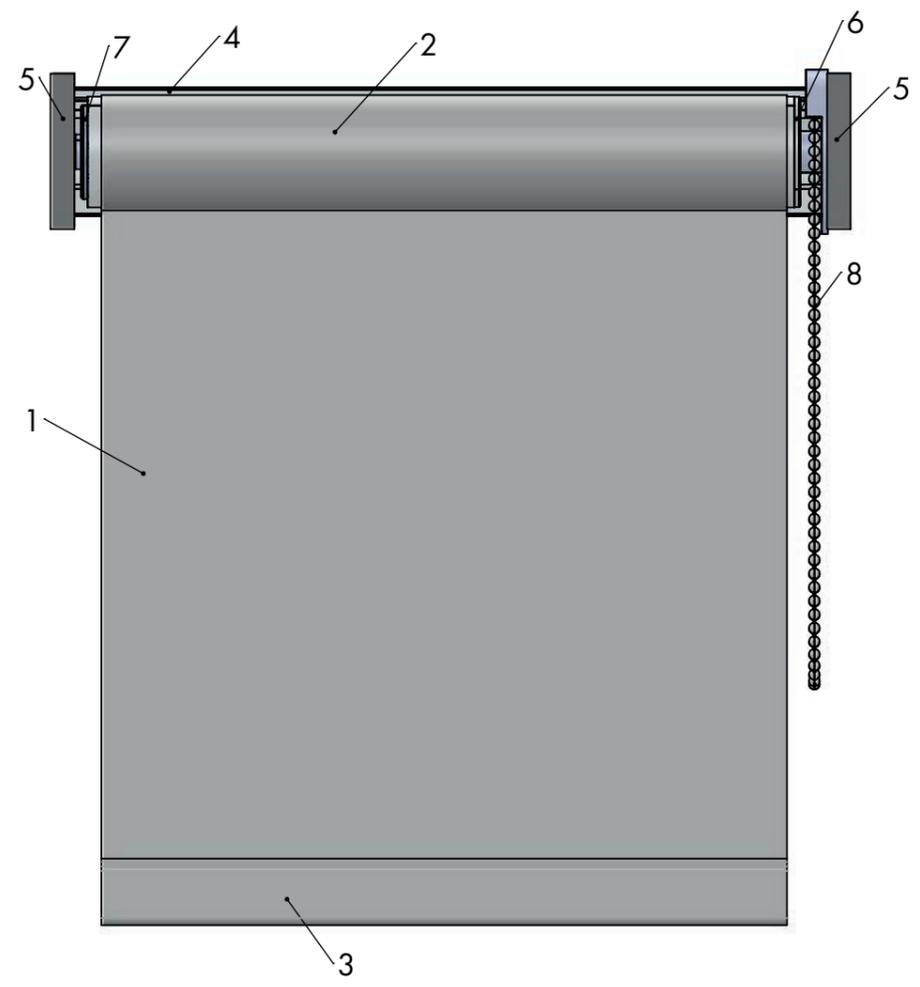

PARAMETERS



- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..
- Chain CH..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	CHM..	chain mechanism
7	EC..	end cup
8	CH..	chain




FINB


SCALE: 1:3

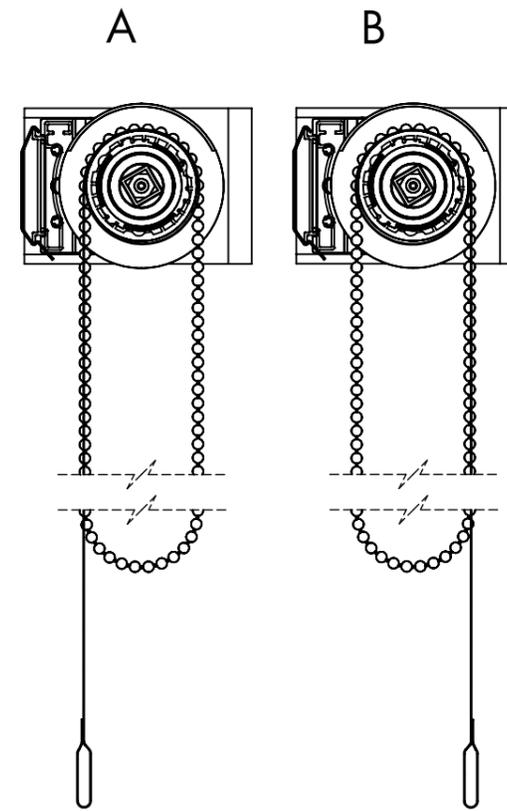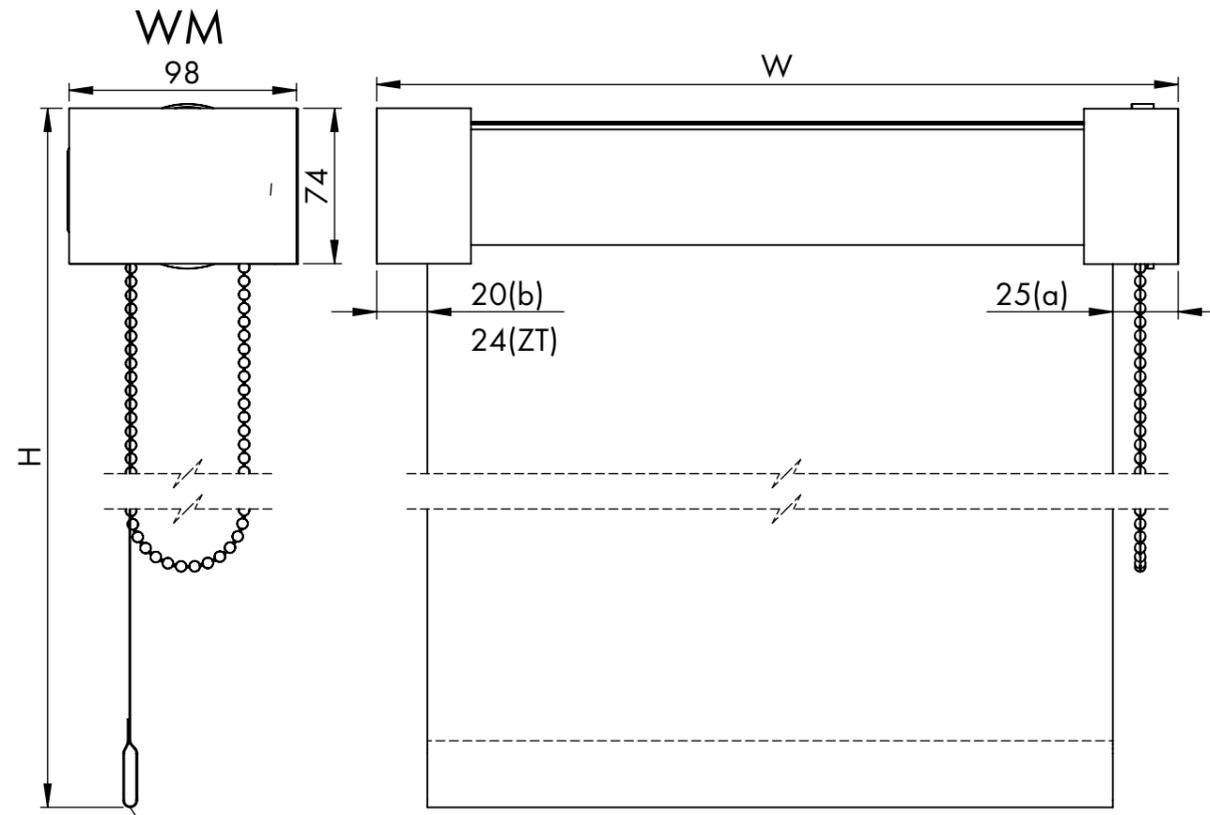


REN47 CHAIN

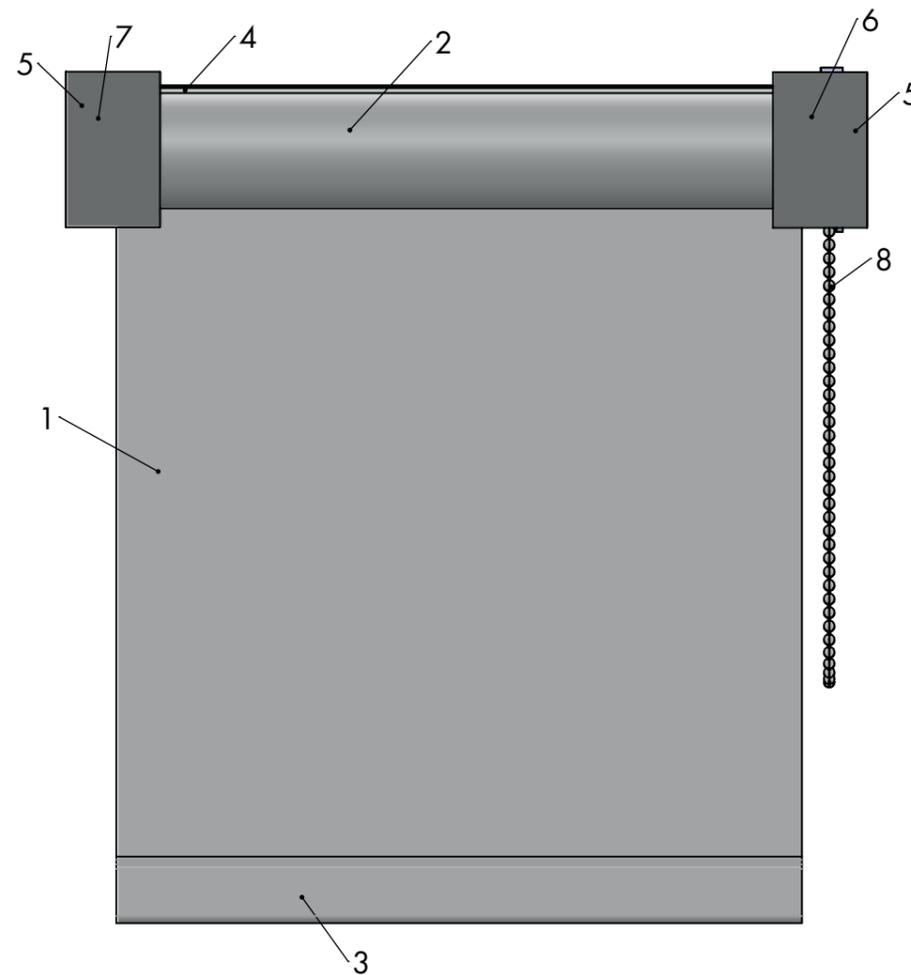

SCALE: 1:3

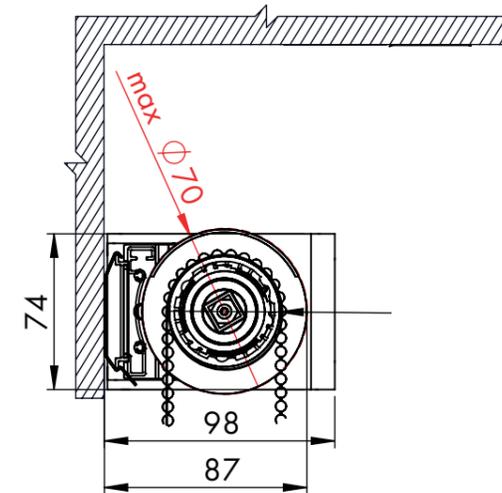

SCALE: 1:2



PARAMETERS


Width	W (in mm)
Height	H (in mm)
Fabric	F..
Unwinding	A or B (contra)
Mounting	WM (wall)
Control Side	L (left) or R (right)
Bottom bar	FIN..
Chain	CH..



FINB



N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	CHM..	chain mechanism
7	EC..	end cup
8	CH..	chain

SCALE: 1:3

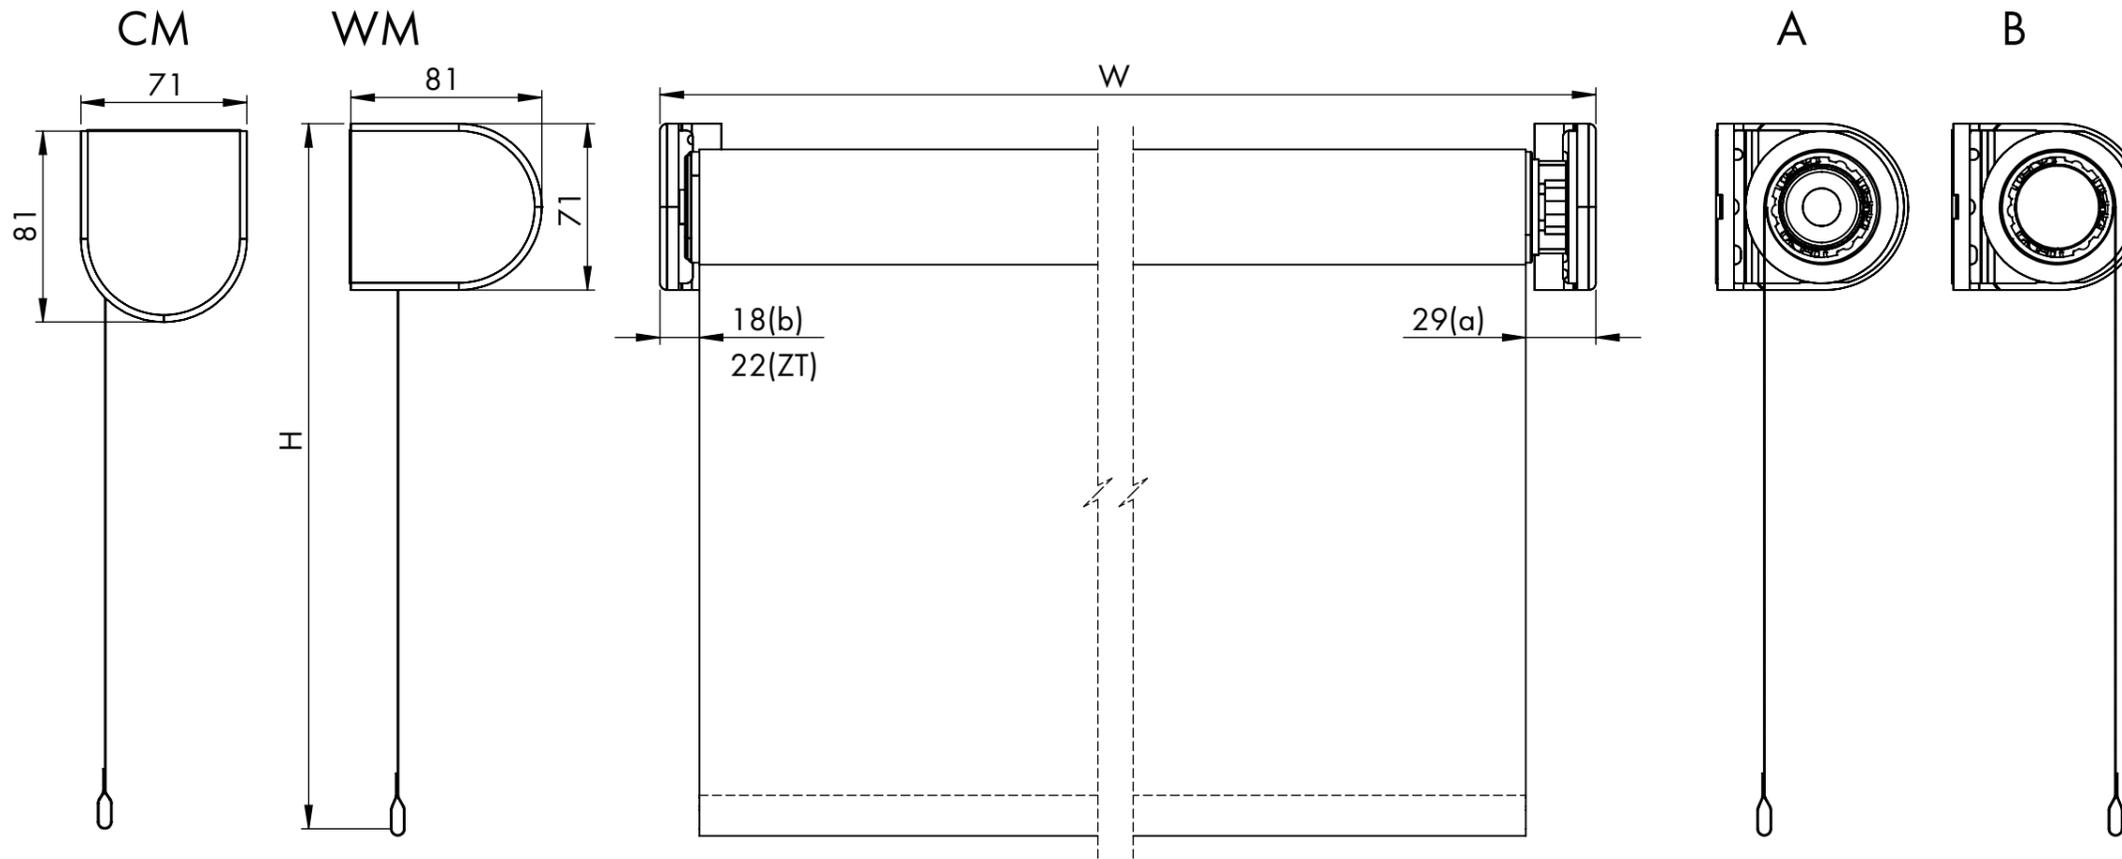

REN47

230V MOTOR HOME

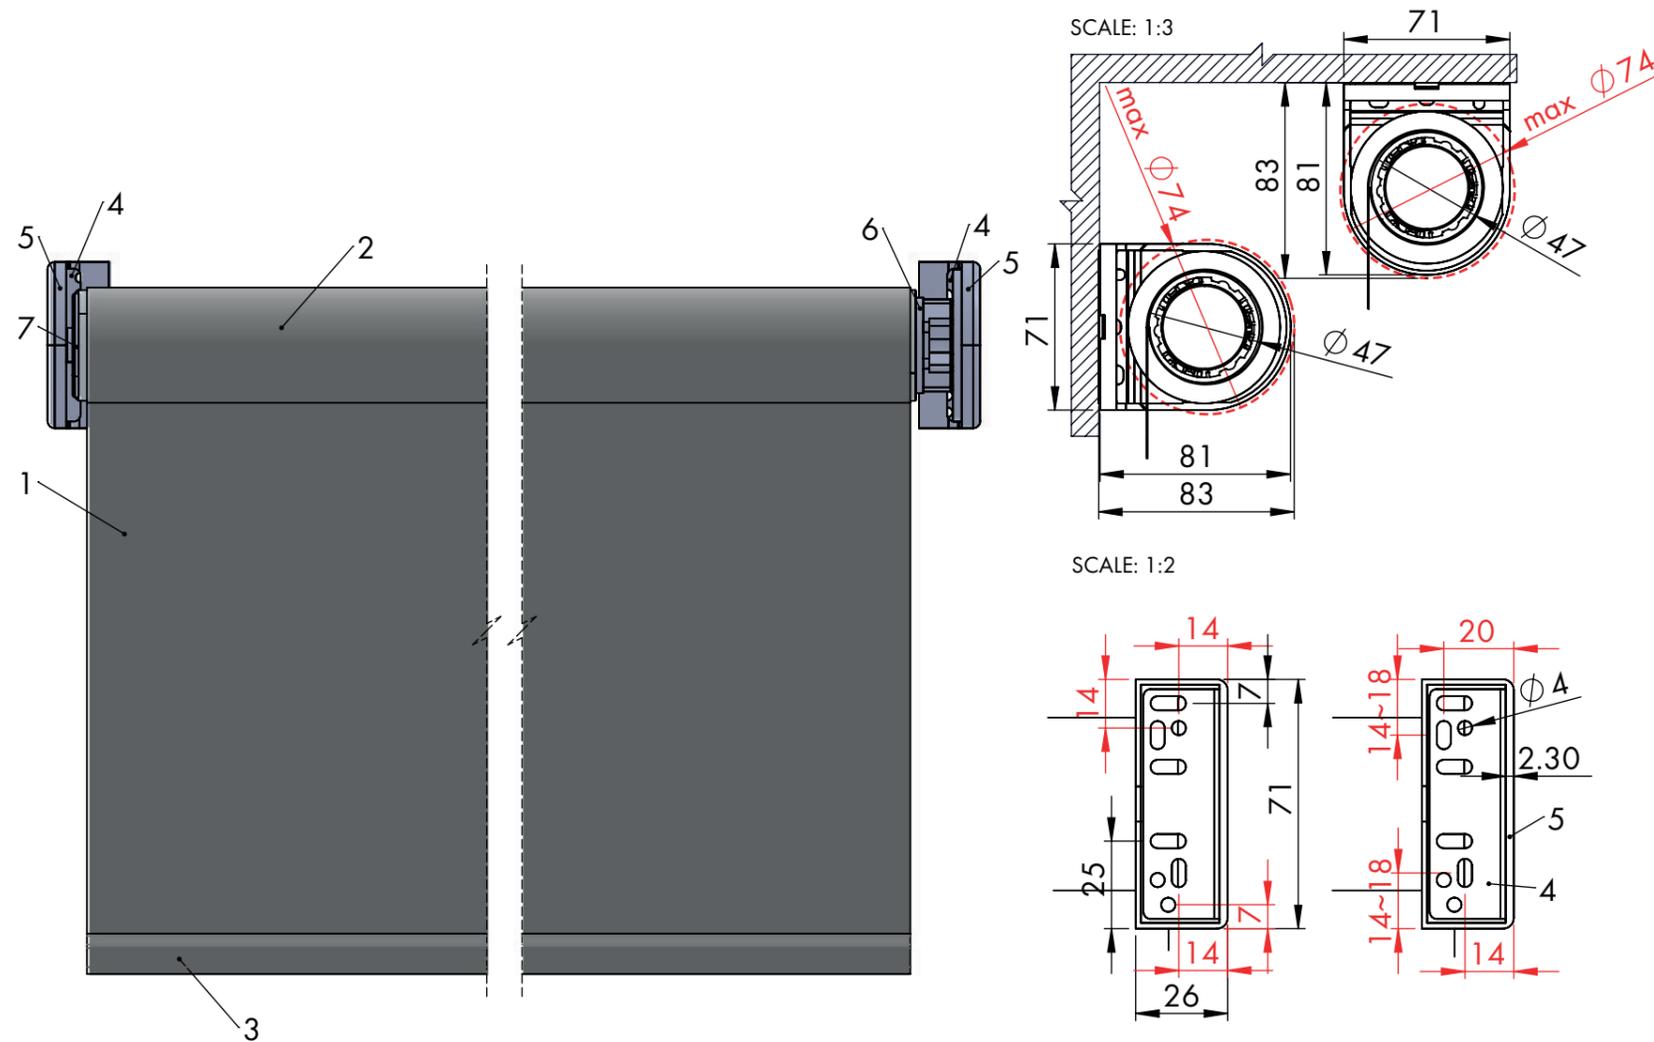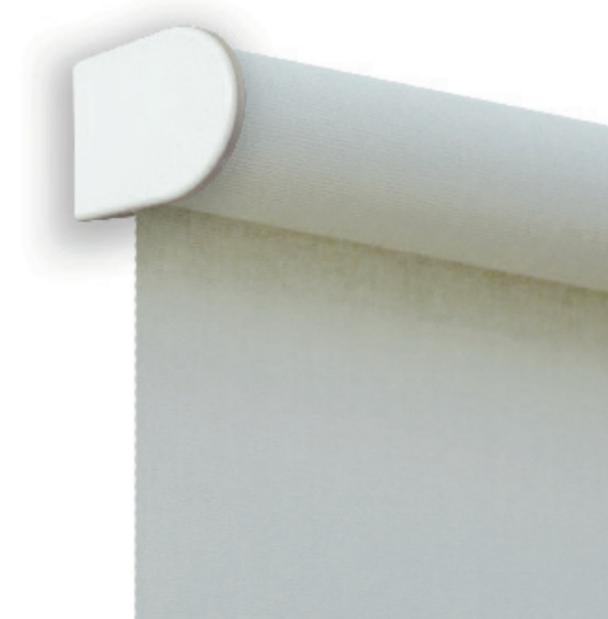



PARAMETERS

Width	W (in mm)
Height	H (in mm)
Fabric	F..
Unwinding	A or B (contra)
Mounting	WM (wall) or CM (ceiling)
Control Side	L (left) or R (right)
Bottom bar	FIN..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup




FINB

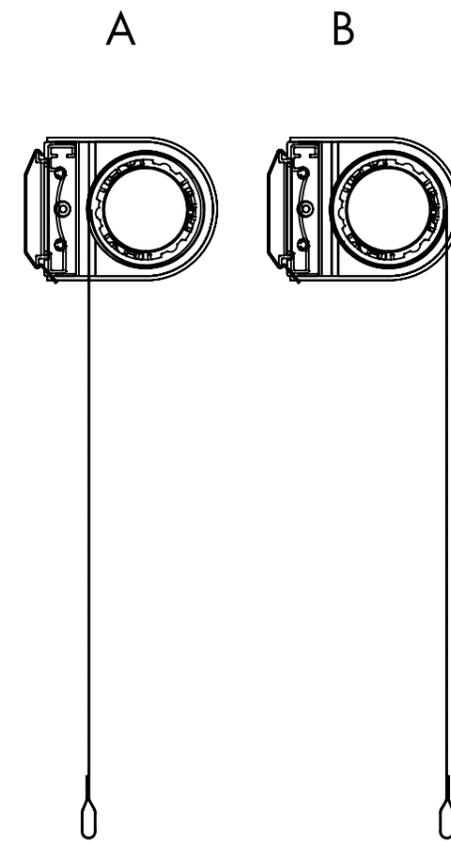
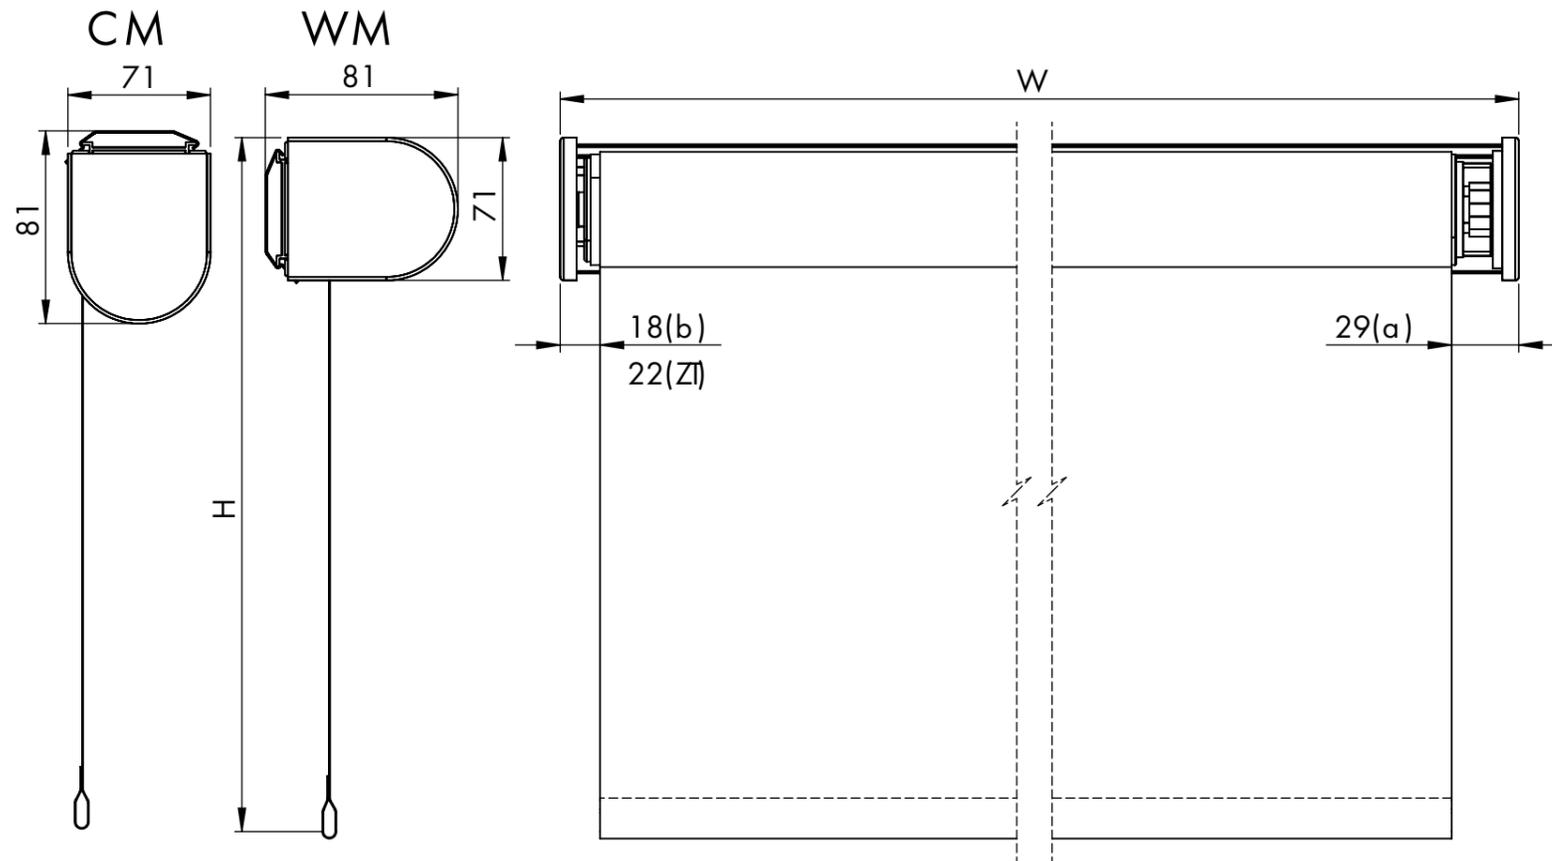


REN47

230V MOTOR SOMFY

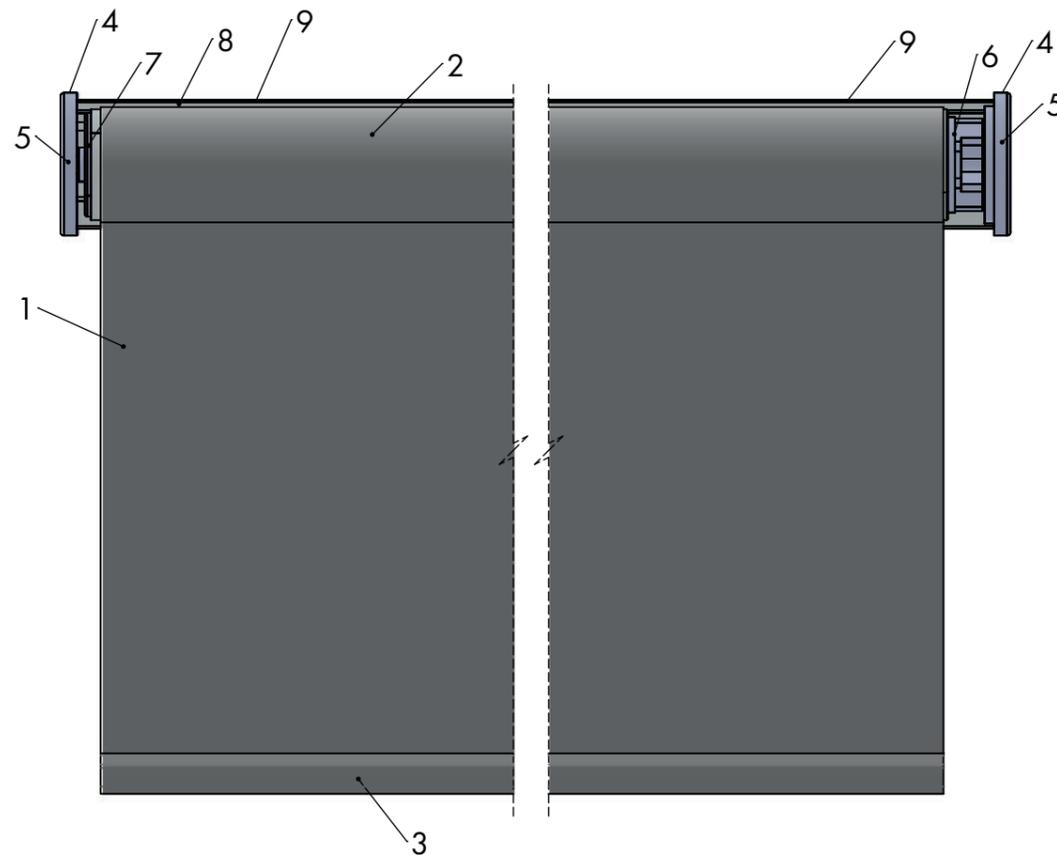

N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MP..	mounting profile
9	MC..	mounting clip

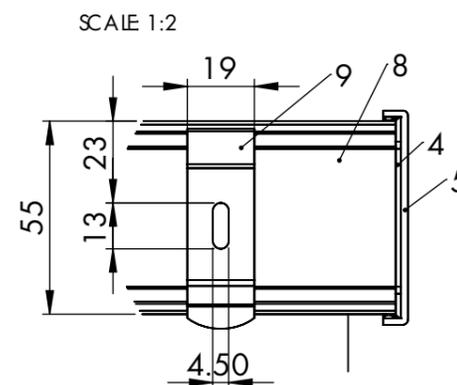
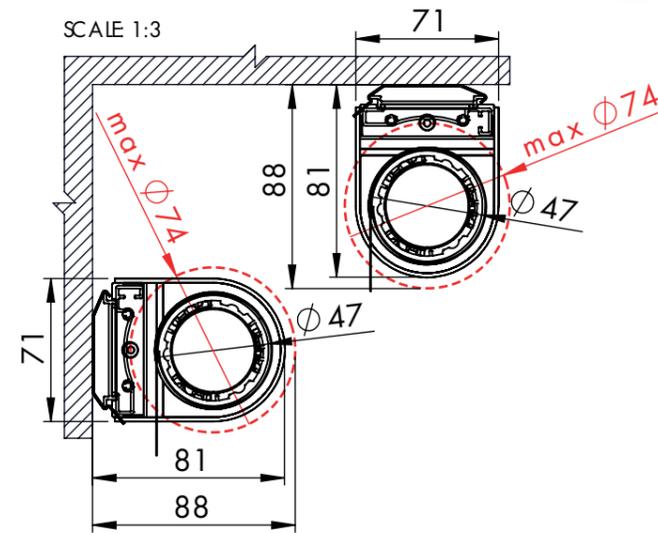


PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..






FINB

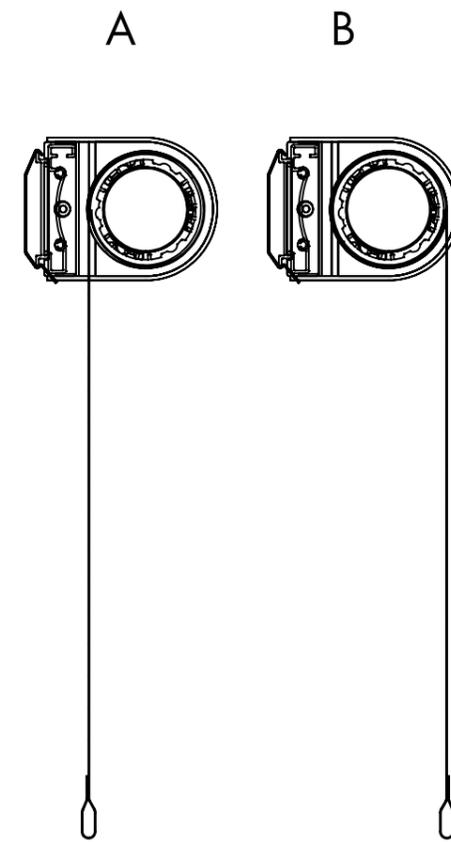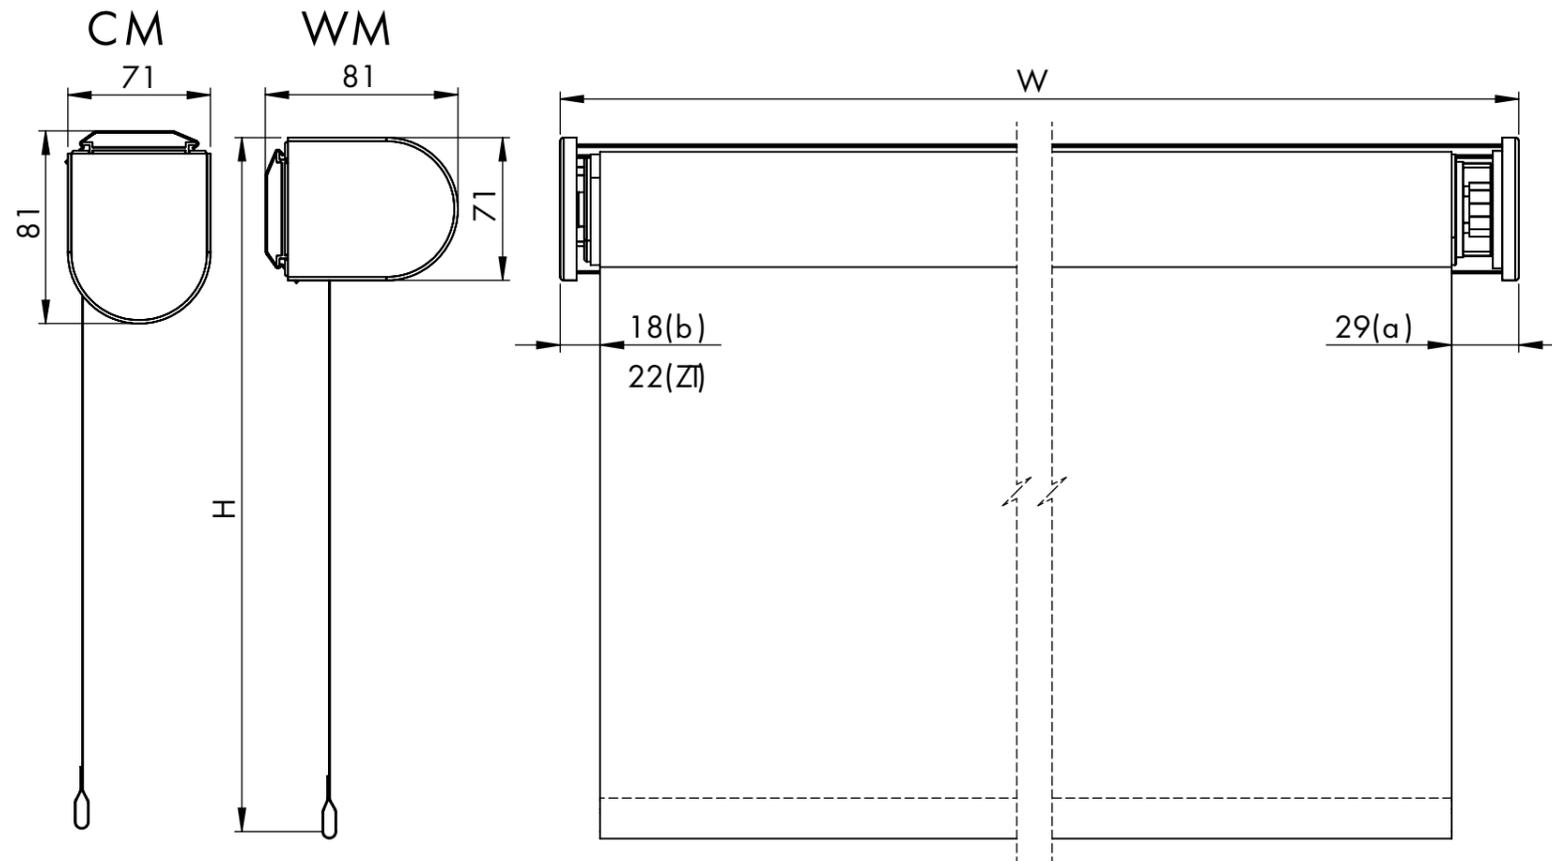

REN47

230V MOTOR HOME

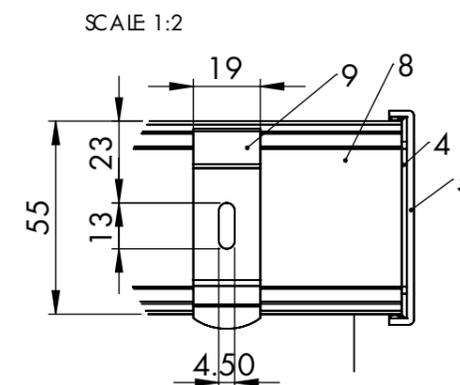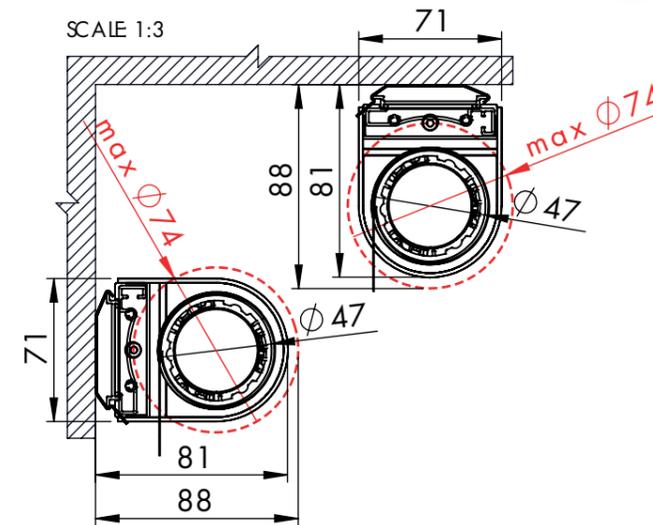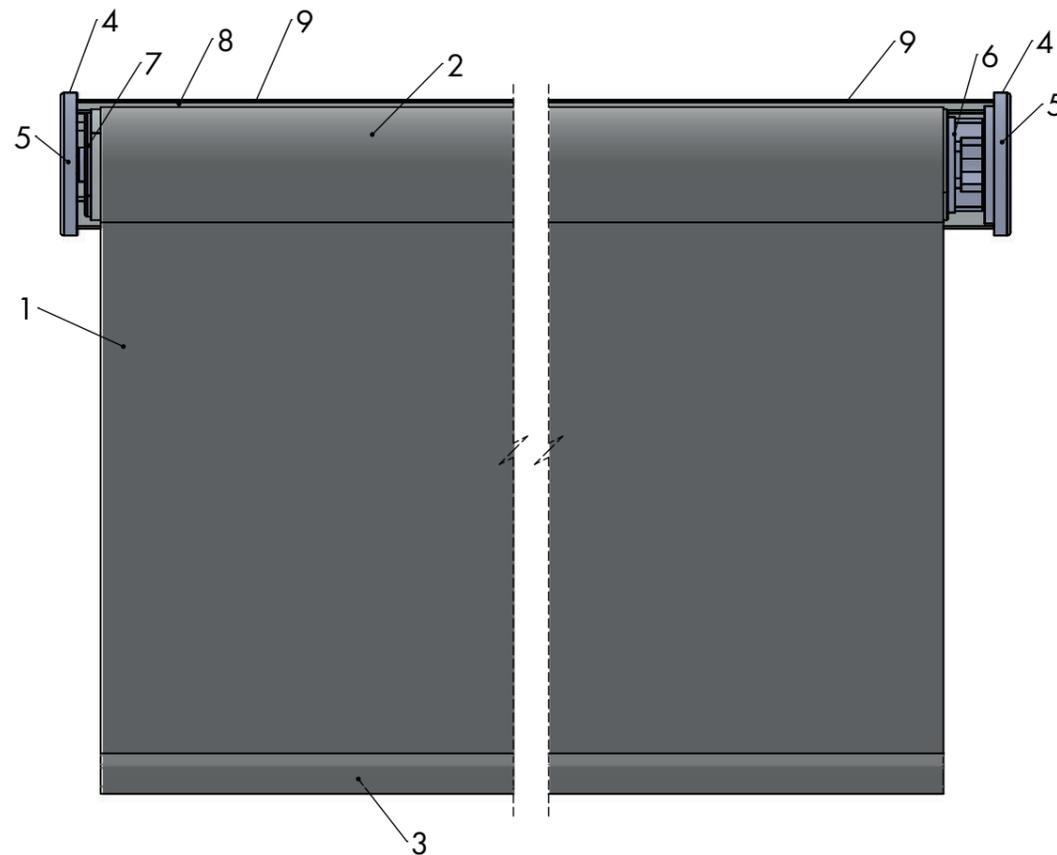



N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MP..	mounting profile
9	MC..	mounting clip

PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FN..






FN.B

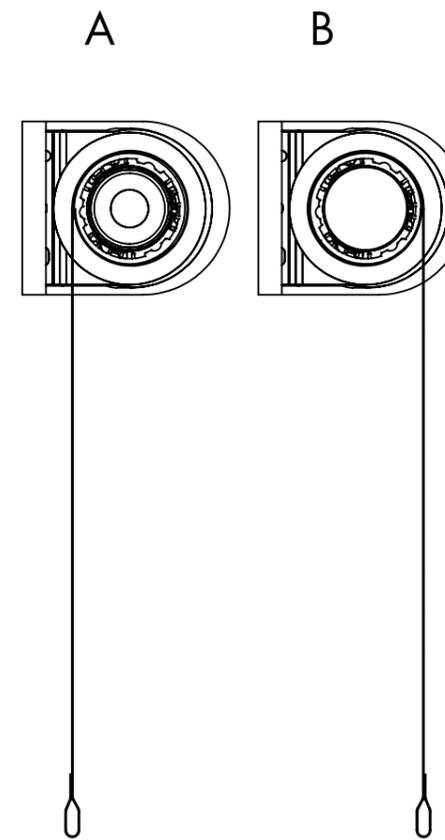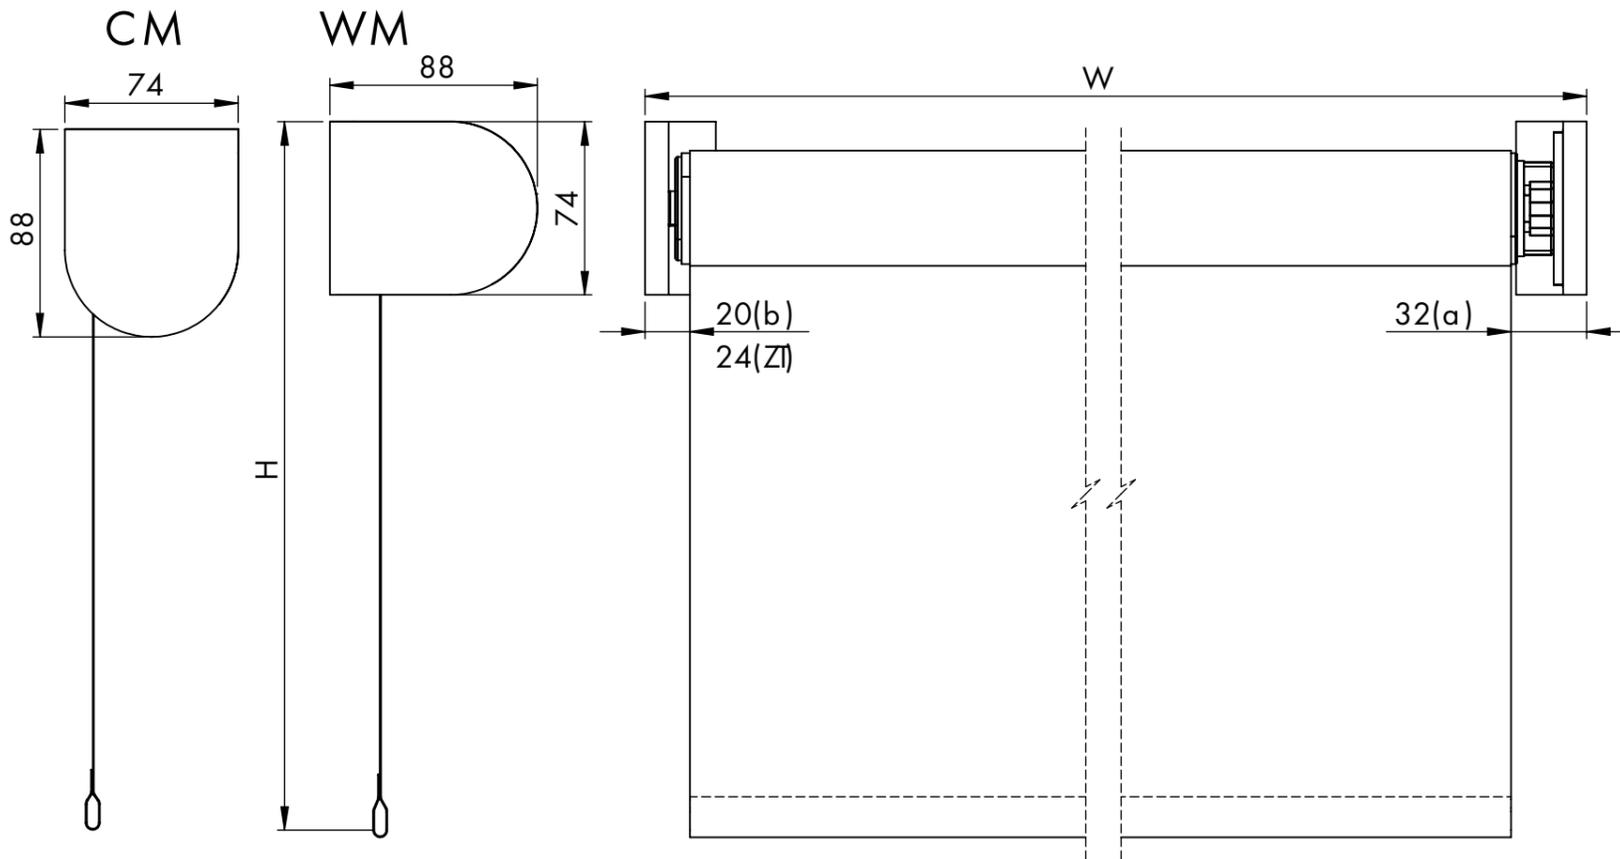

REN47

230V MOTOR SOMFY

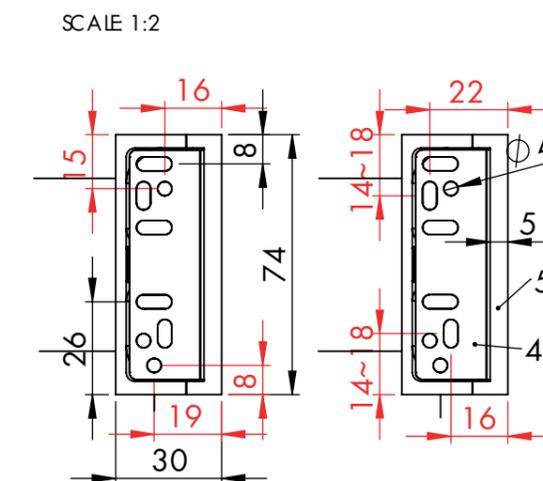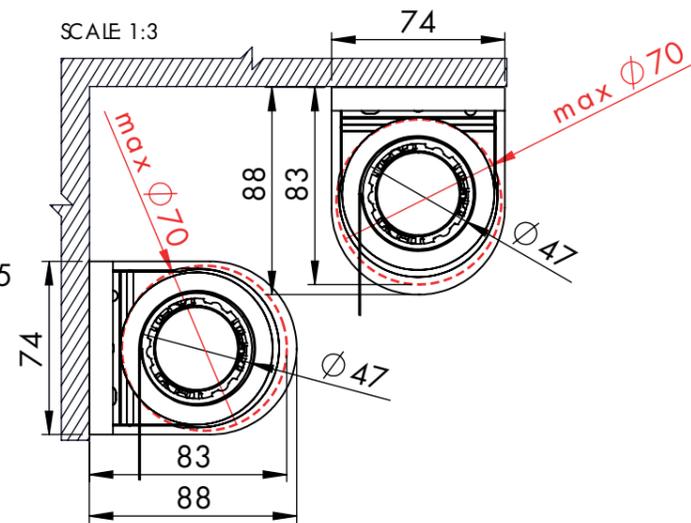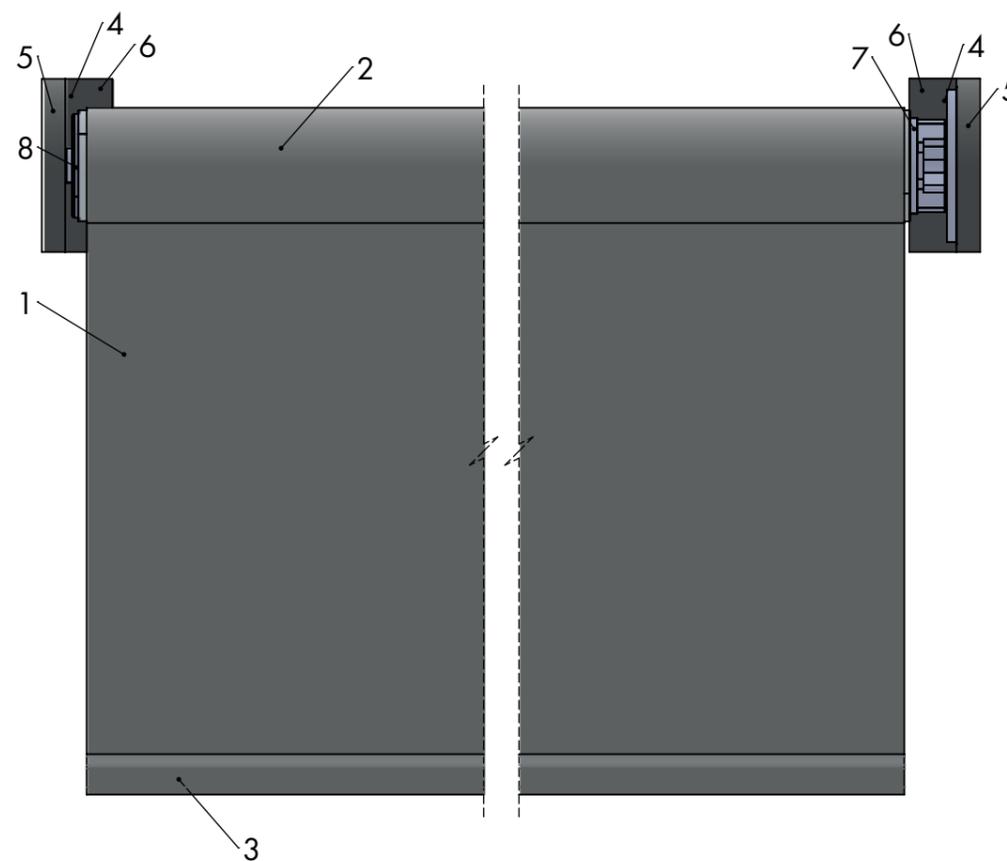



PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FN..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	SC..	screw cover
7	MOT..	motor + adapter
8	EC..	end cup






FN.B

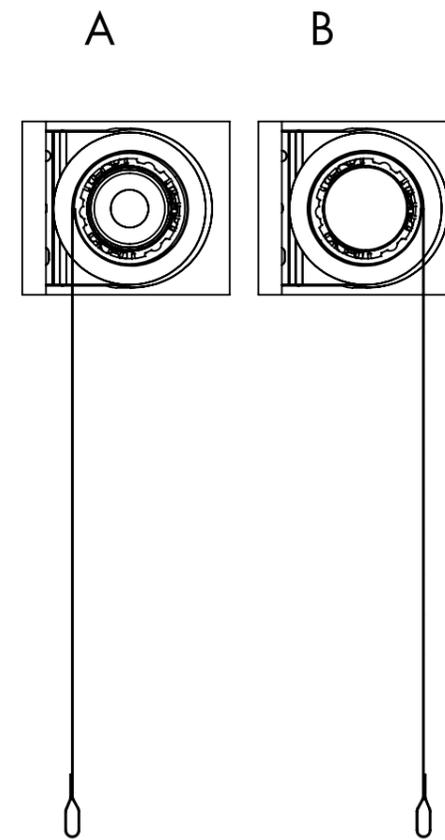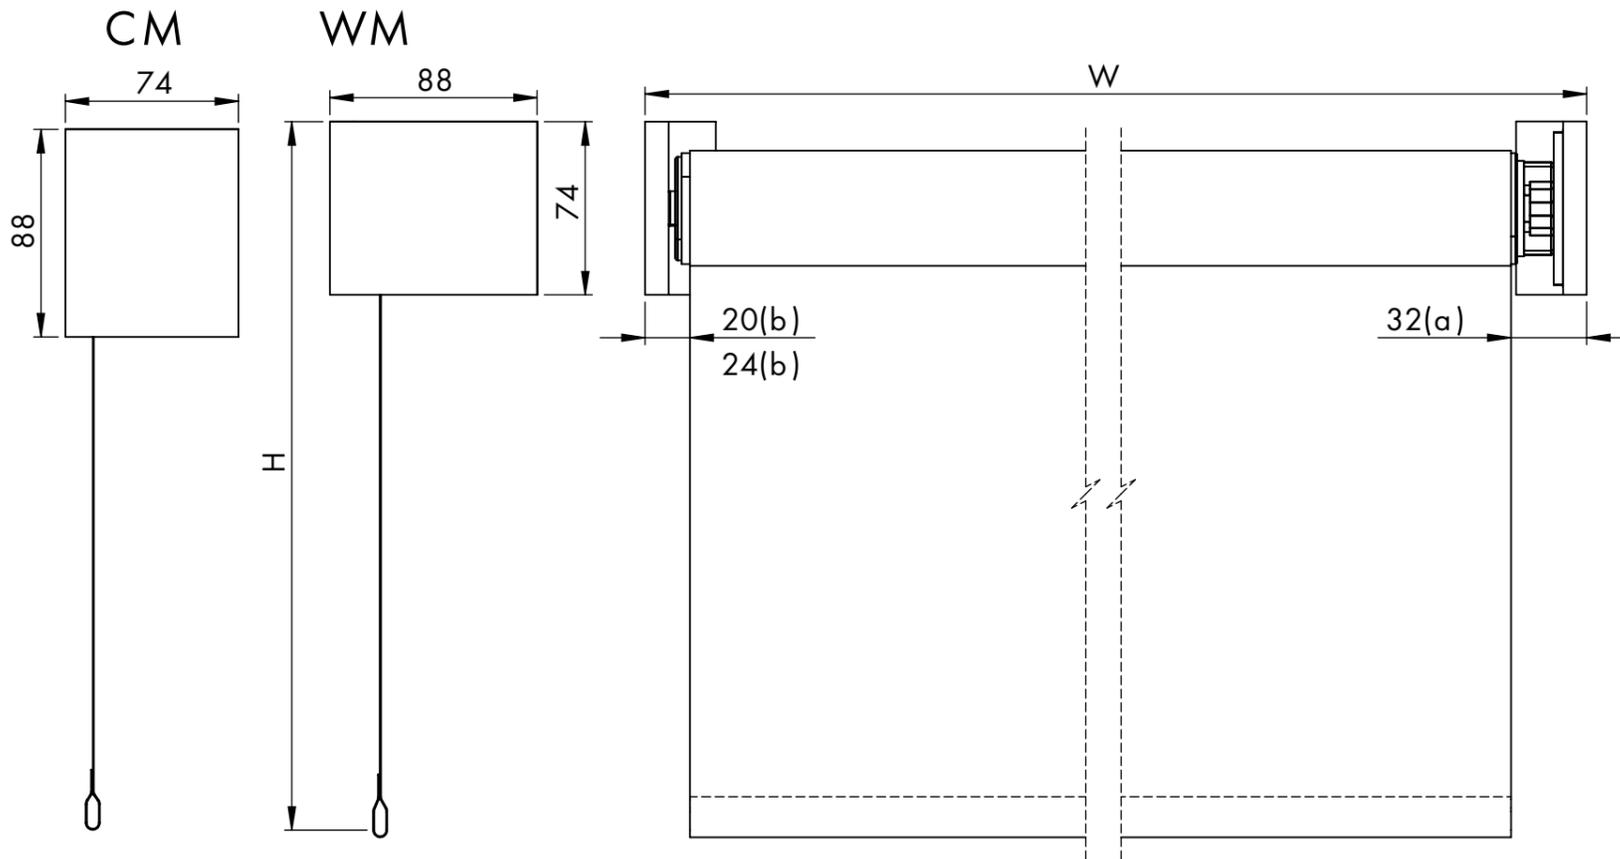

REN47

230V MOTOR SOMFY

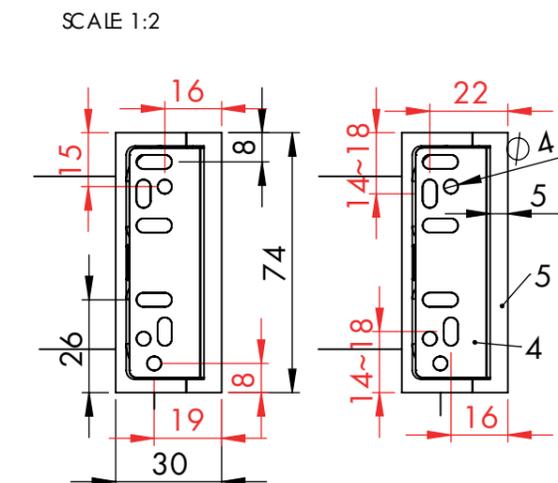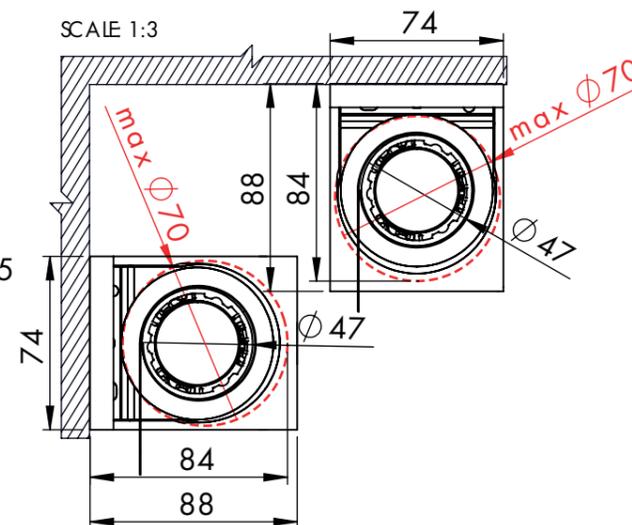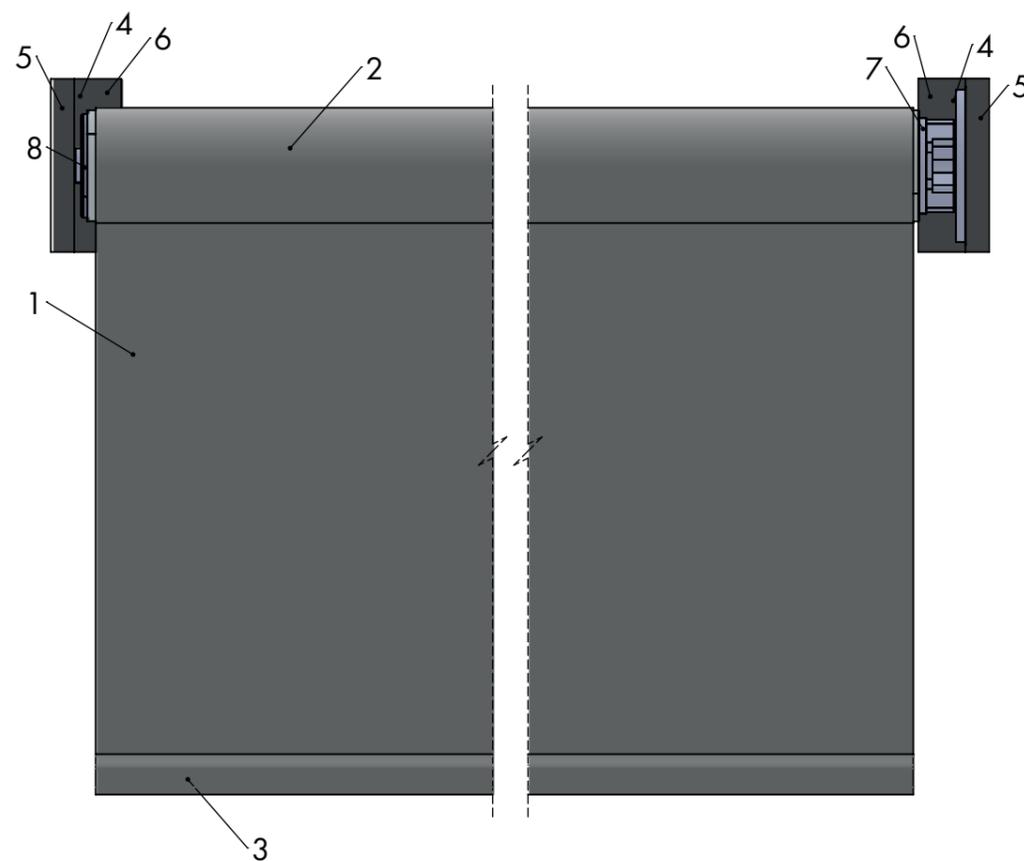



N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	SC..	screw cover
7	MOT..	motor + adapter
8	EC..	end cup

PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FN..







FNBN

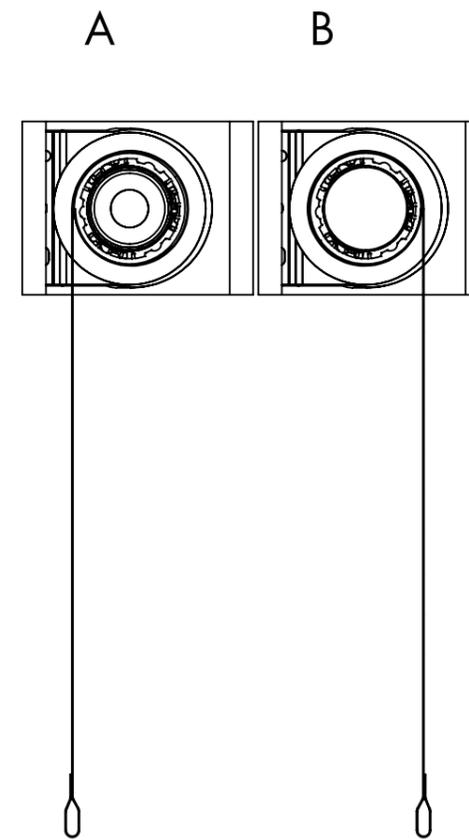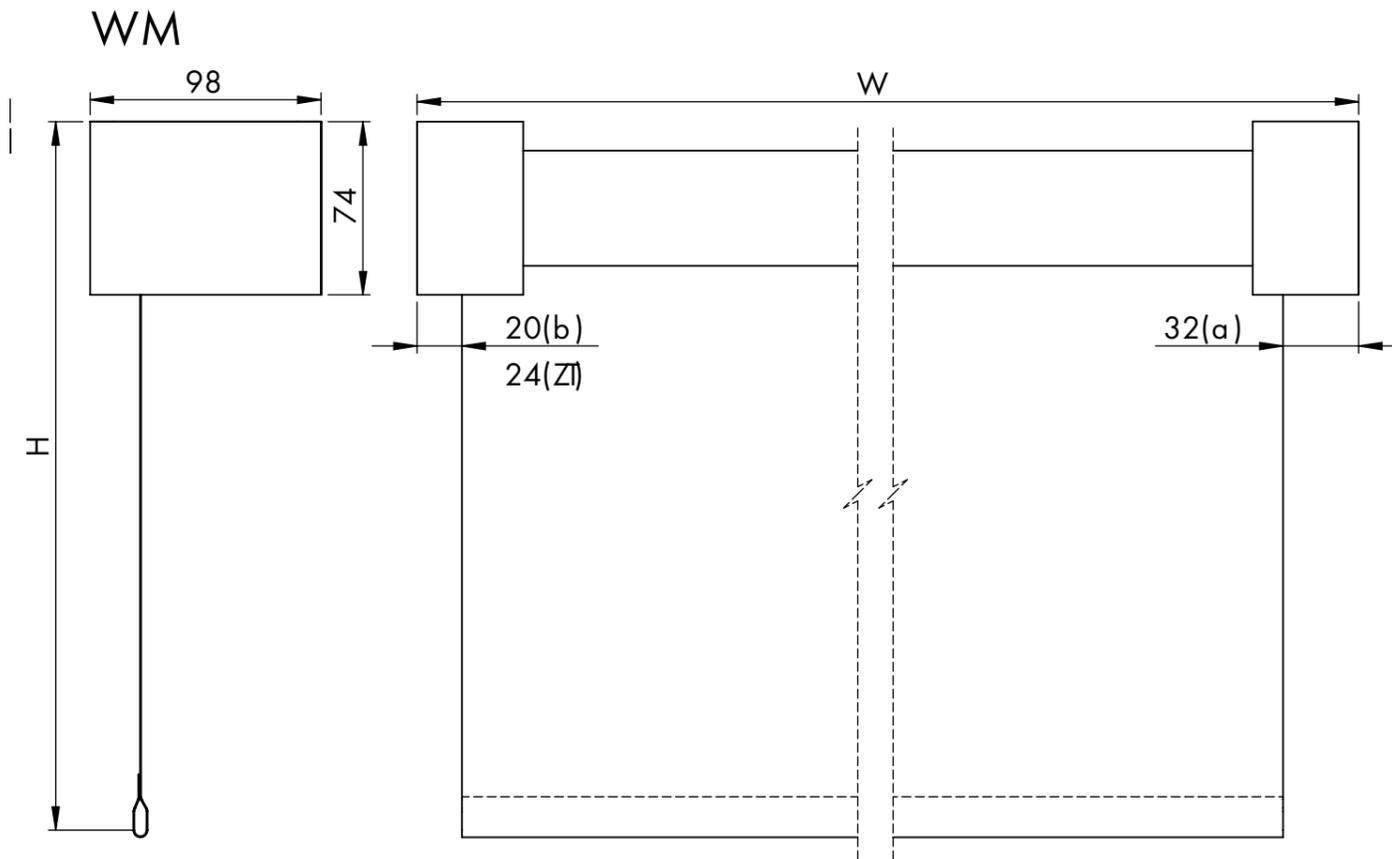

REN47

230V MOTOR SOMFY

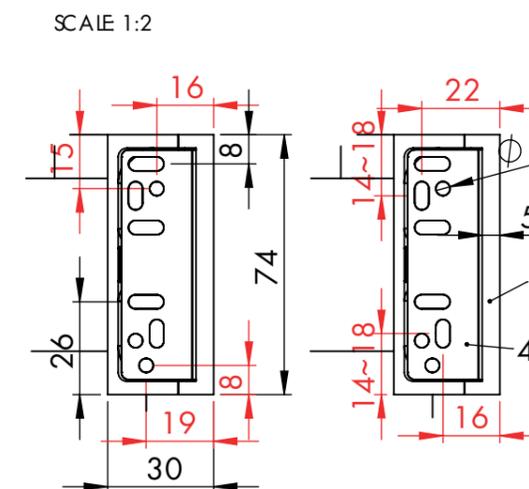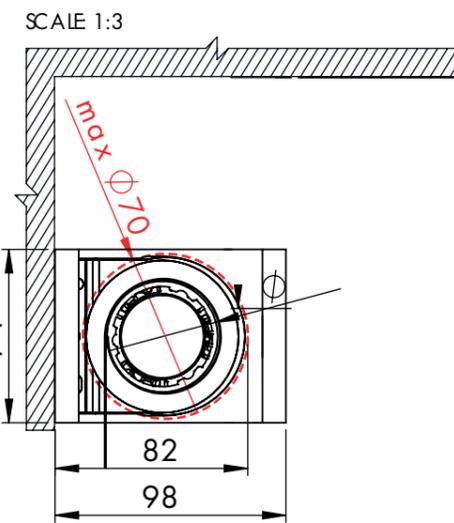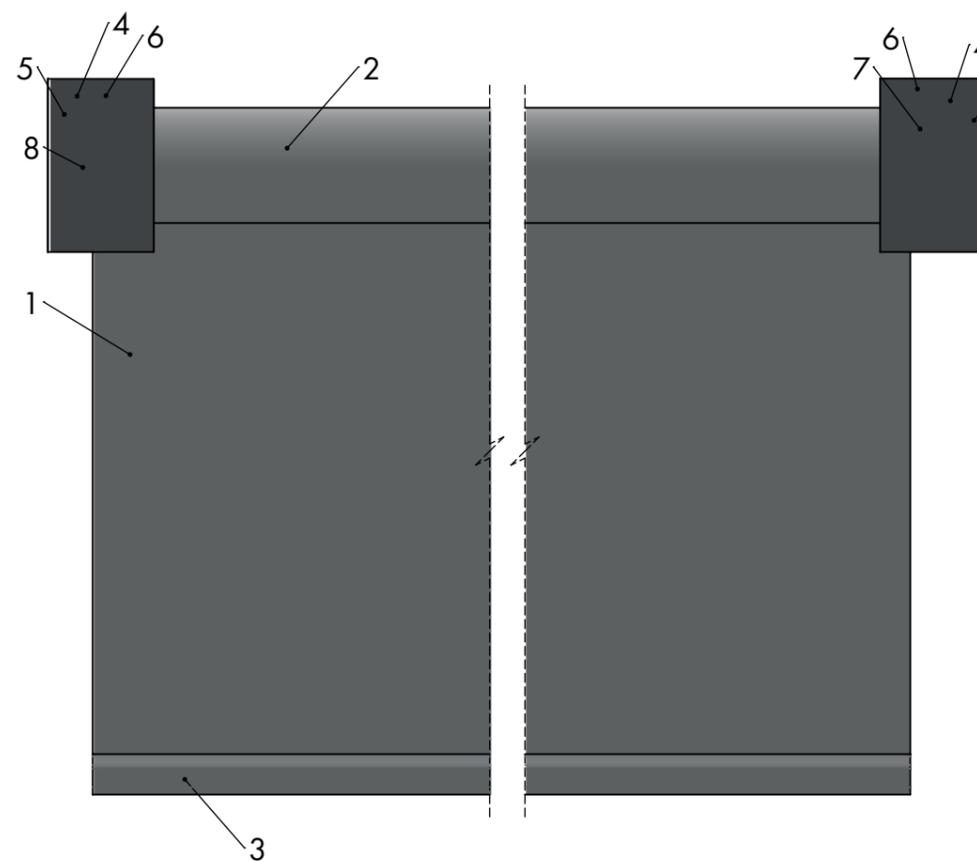



PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall)
- Control Side L (left) or R (right)
- Bottom bar FN..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	SC..	screw cover
7	MOT..	motor + adapter
8	EC..	end cup



FNB


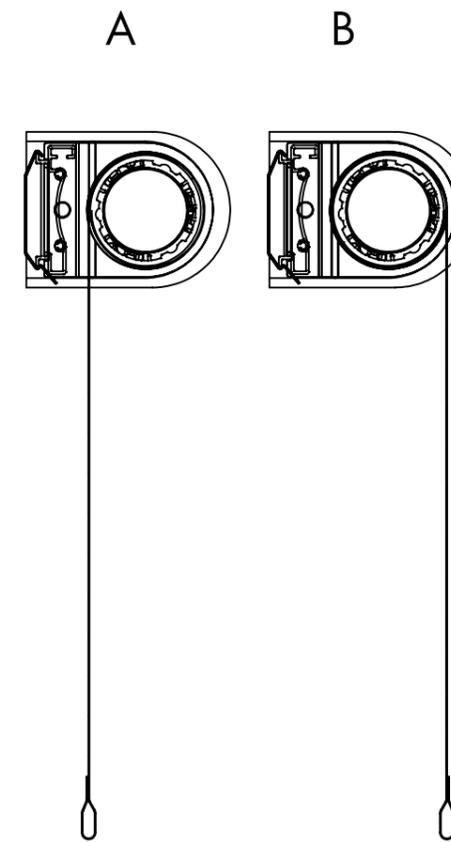
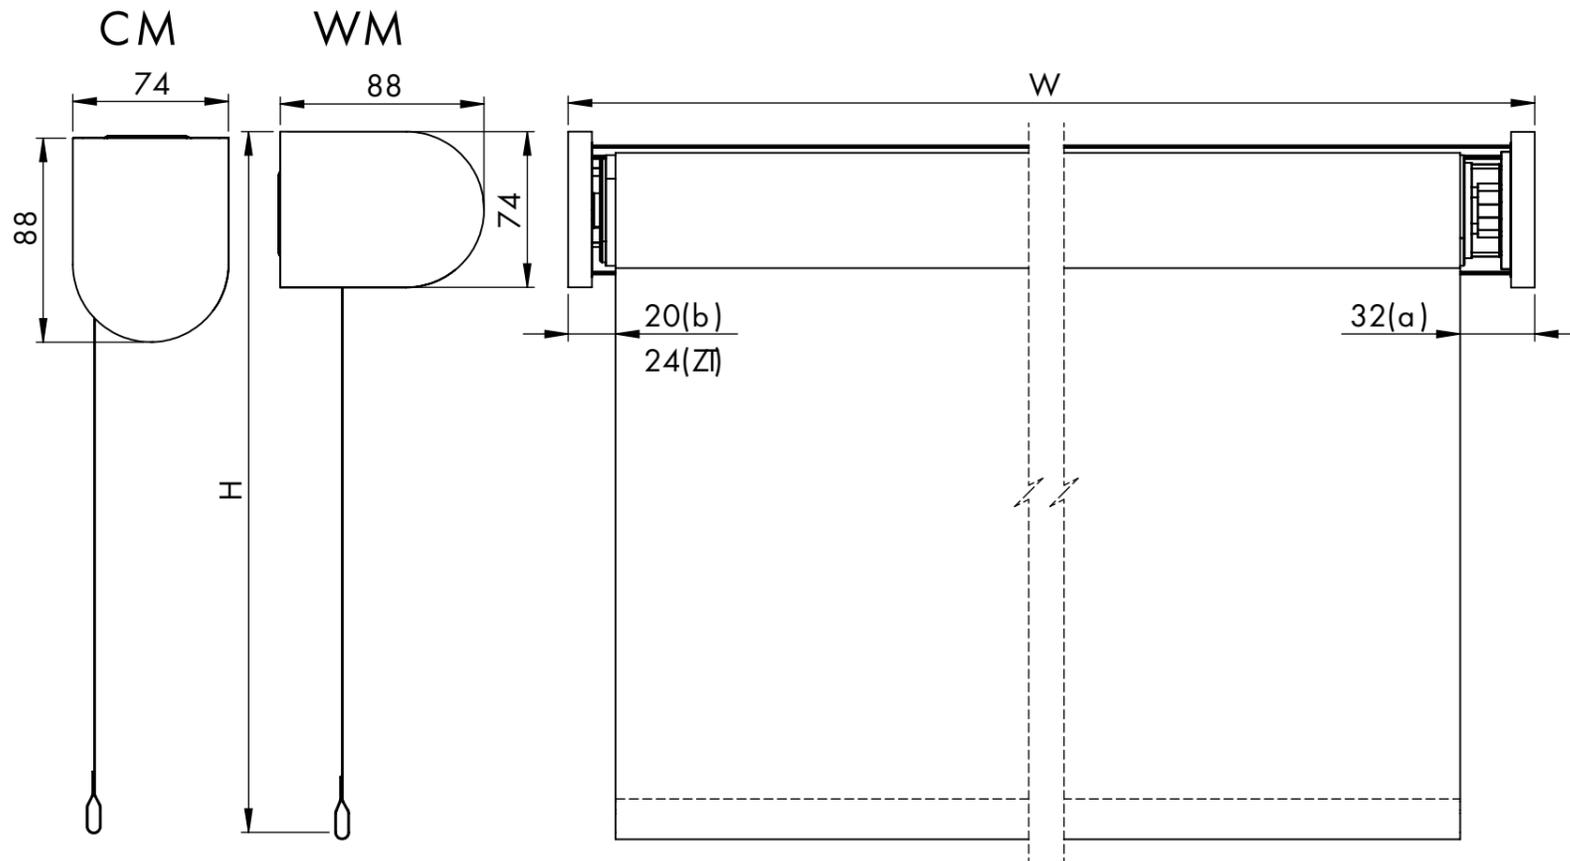


REN47

230V MOTOR SOMFY



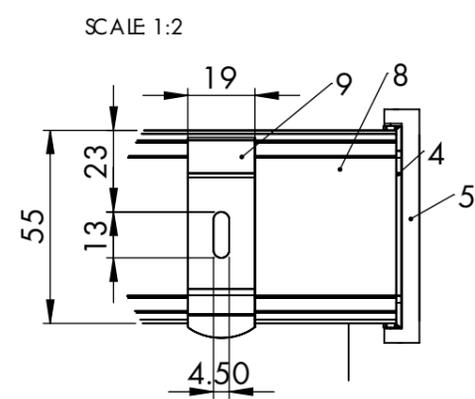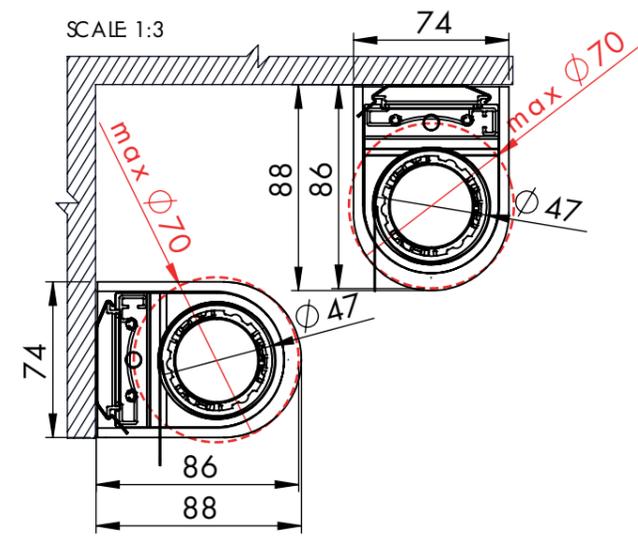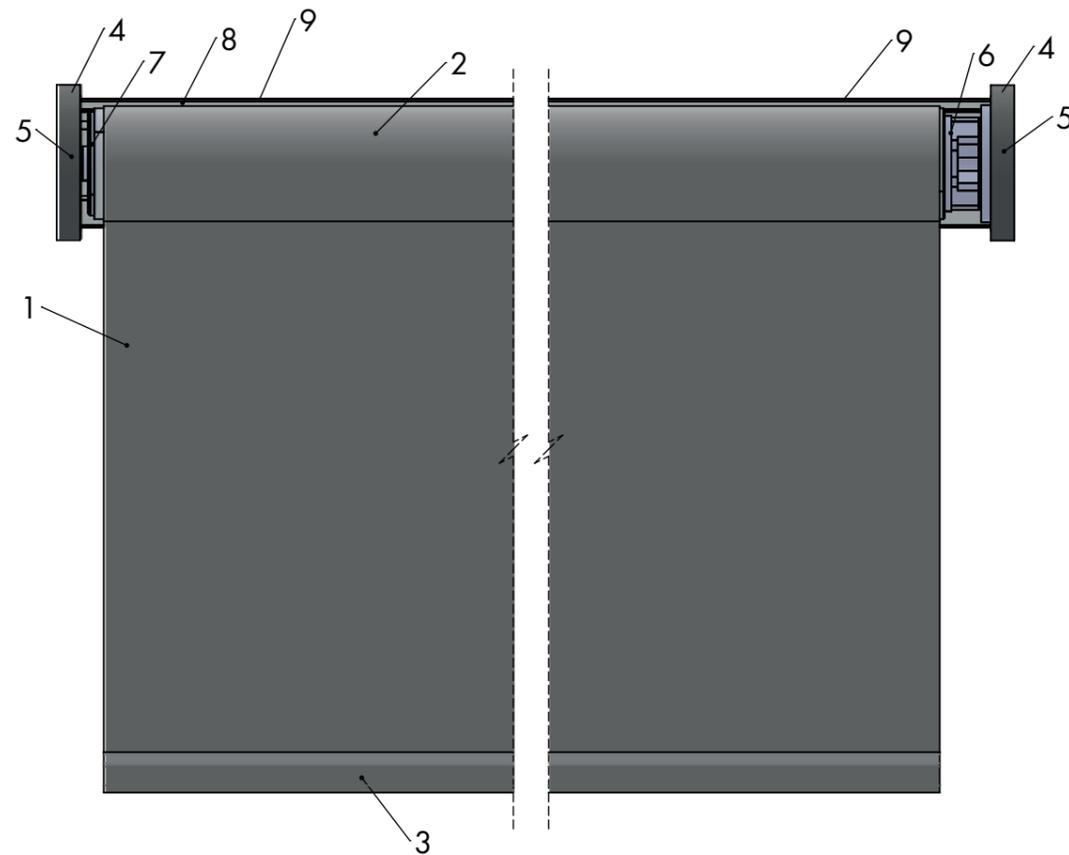



N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MP..	mounting profile
9	MC..	mounting clip

PARAMETERS




- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..



FINB

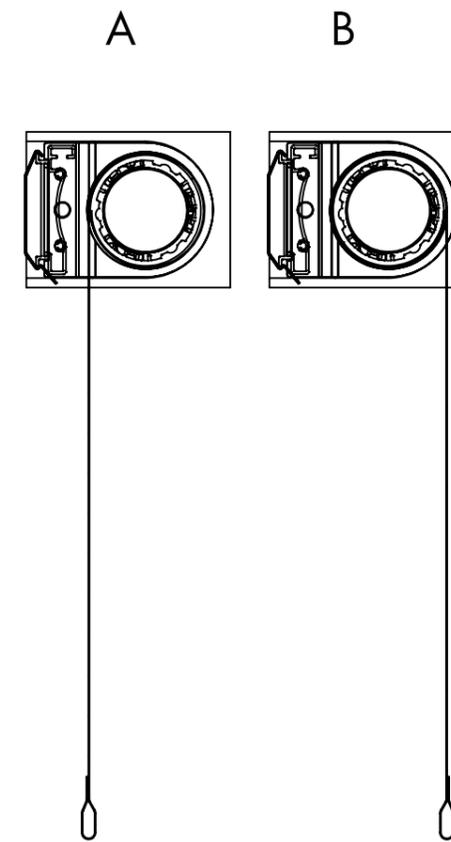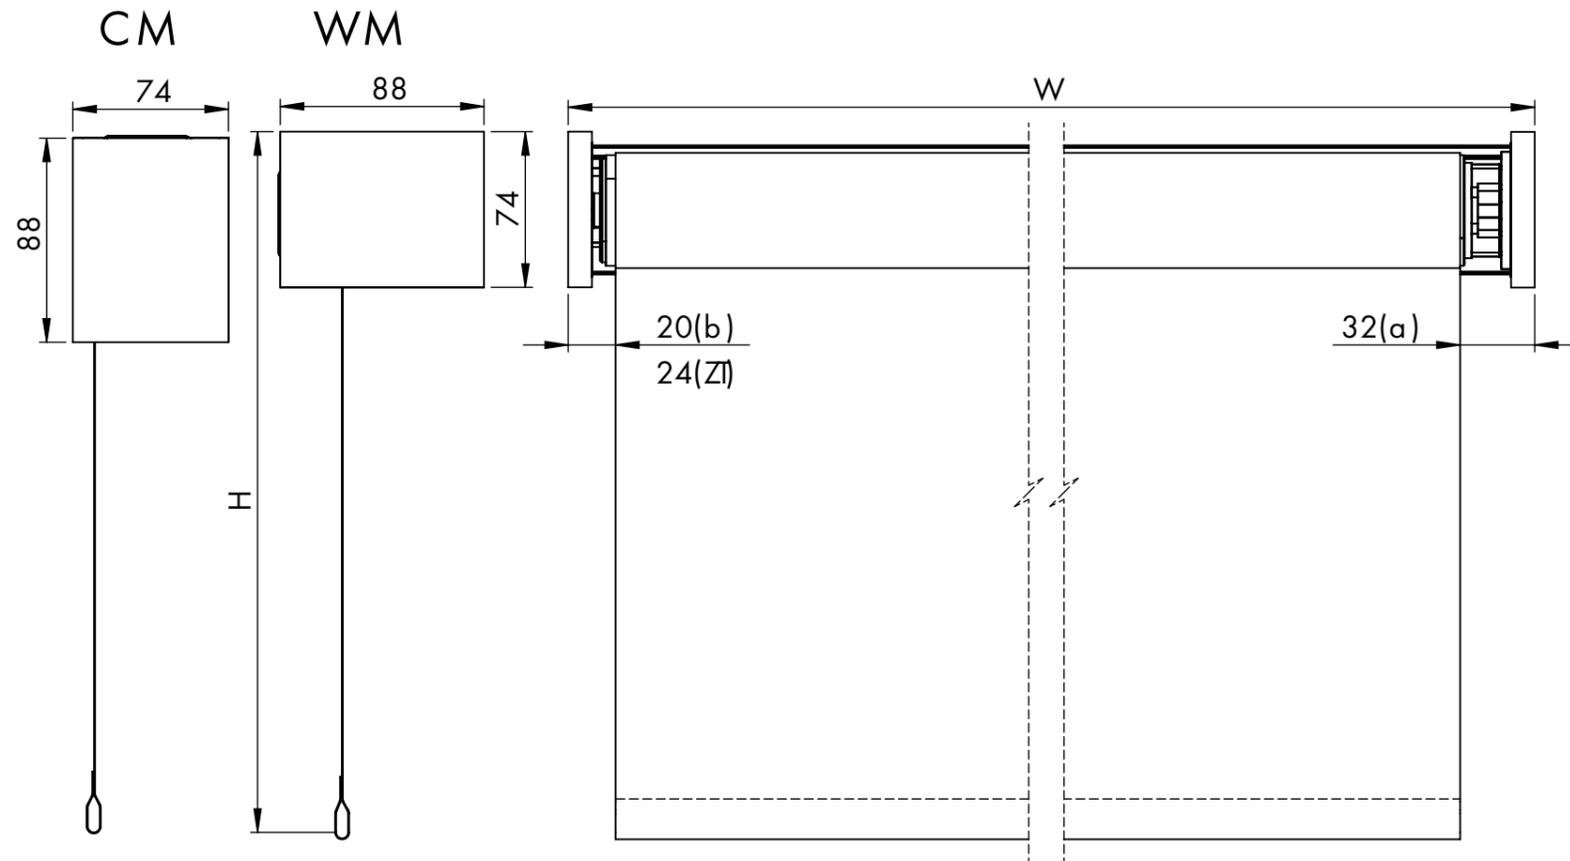

REN47
230V MOTOR SOMFY

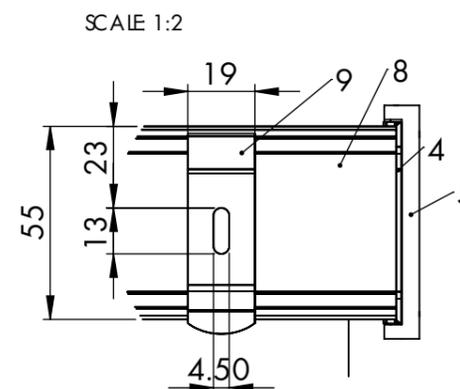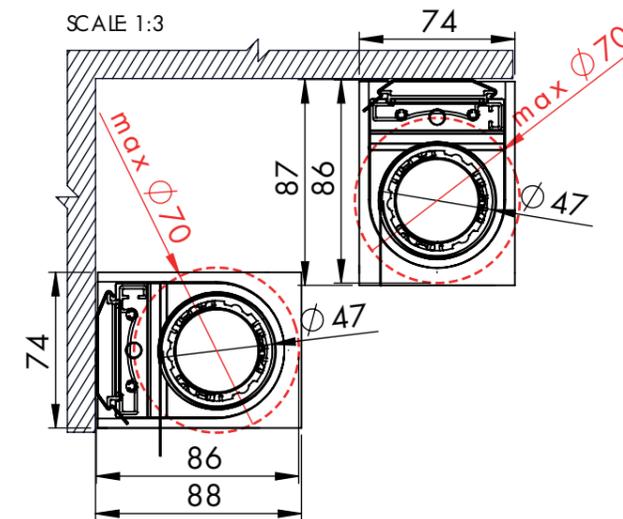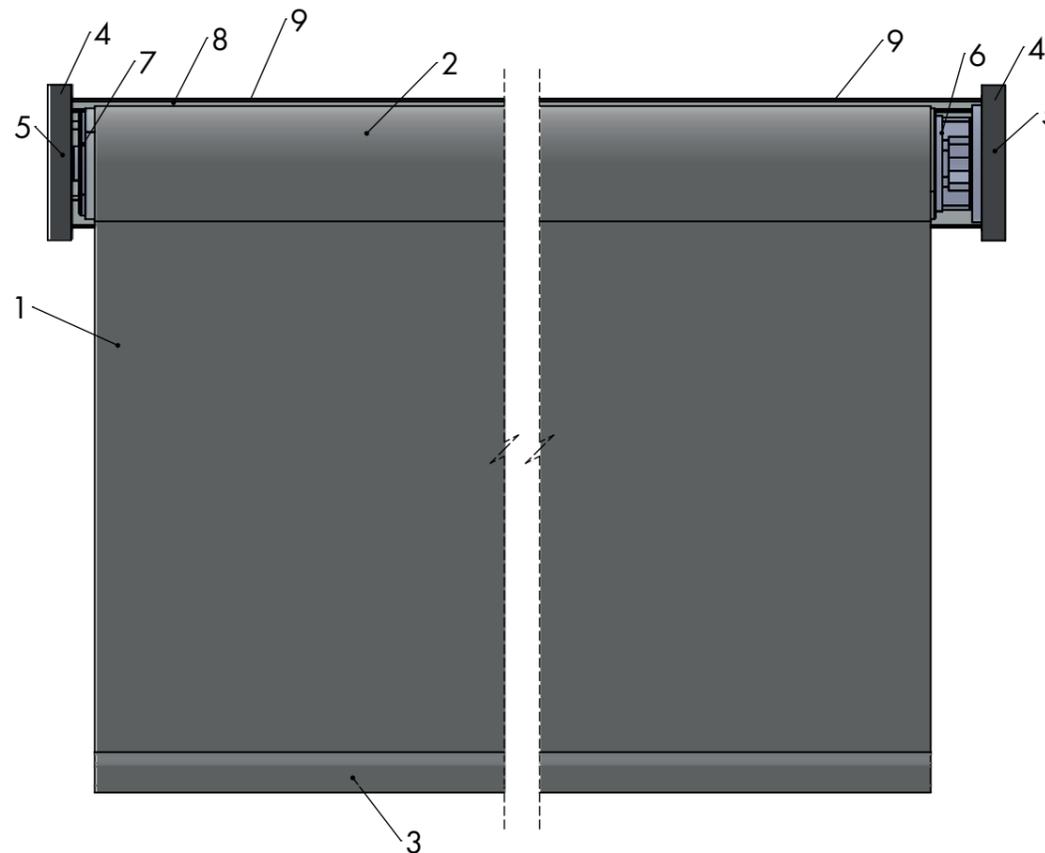



N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MP..	mounting profile
9	MC..	mounting clip

PARAMETERS


- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..





FINB

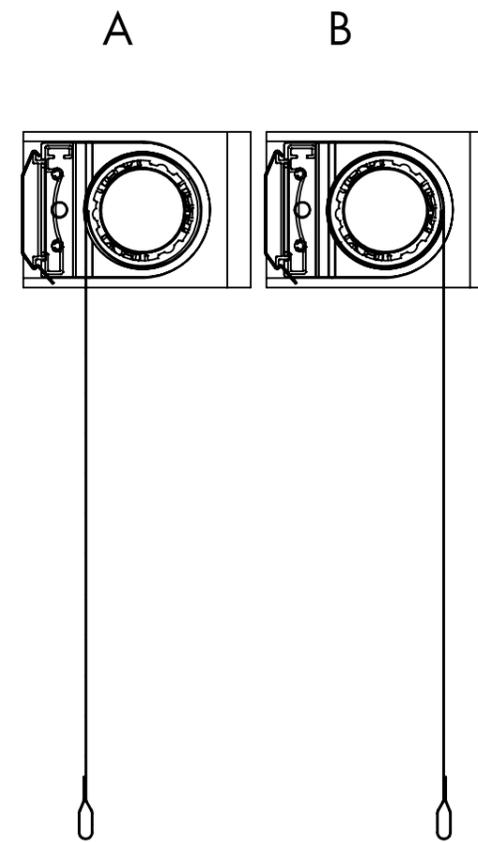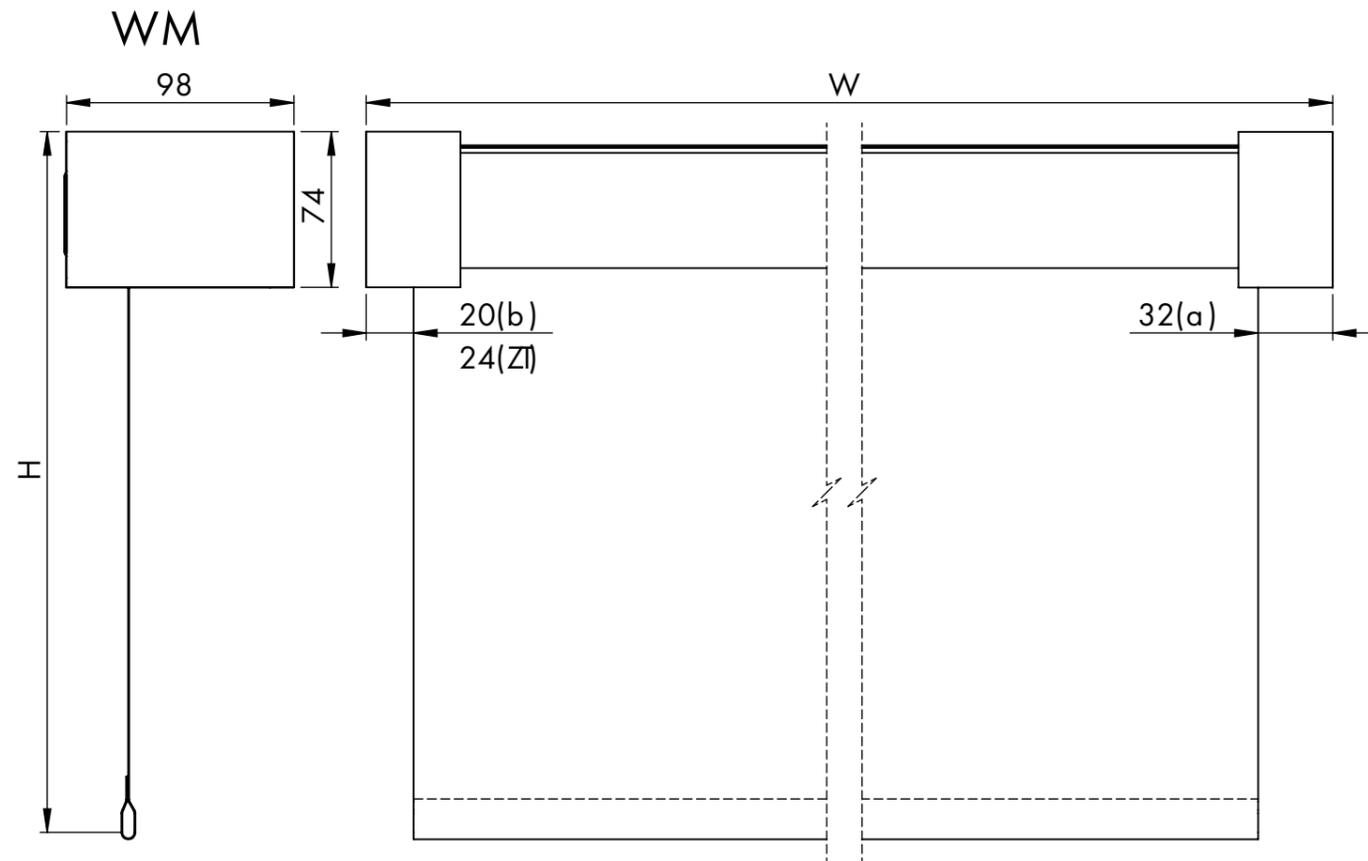

REN47
230V MOTOR SOMFY

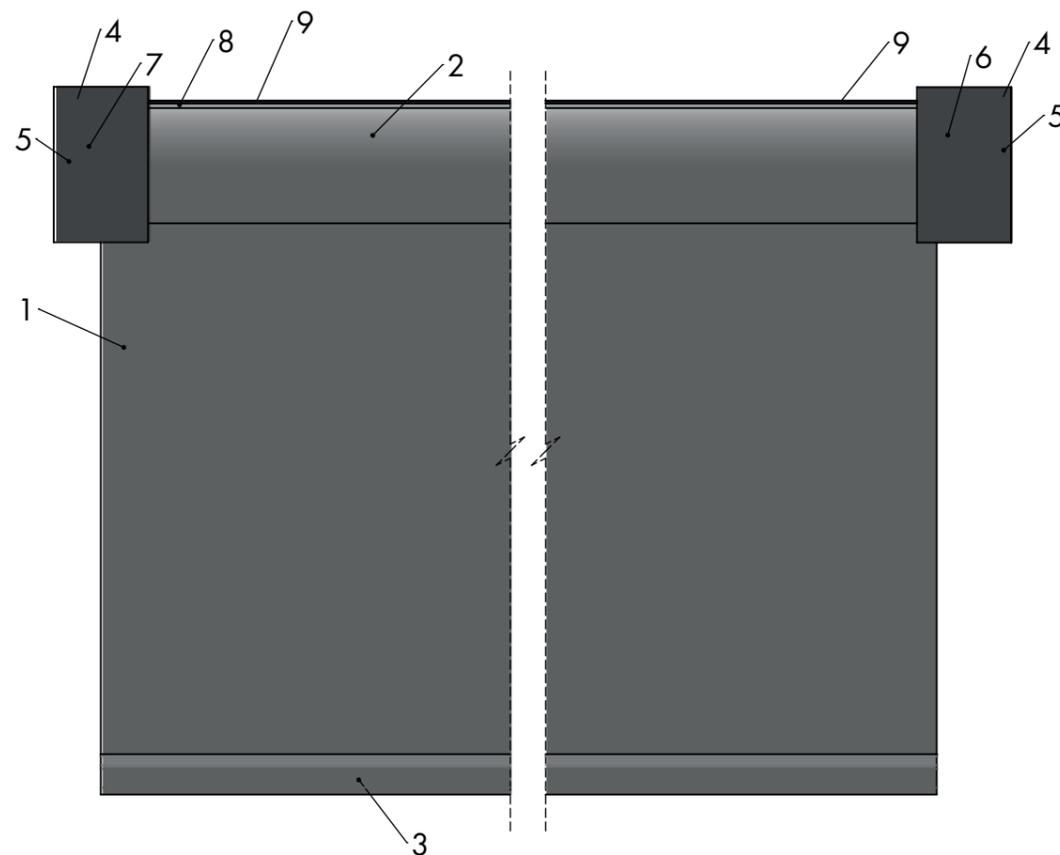

N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MP..	mounting profile
9	MC..	mounting clip

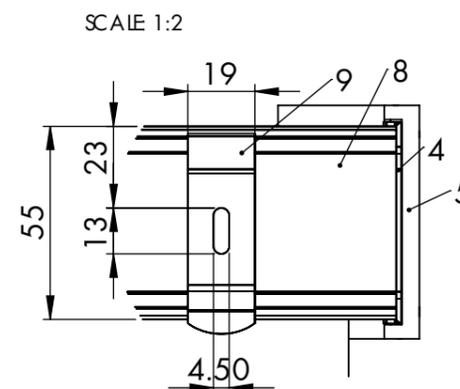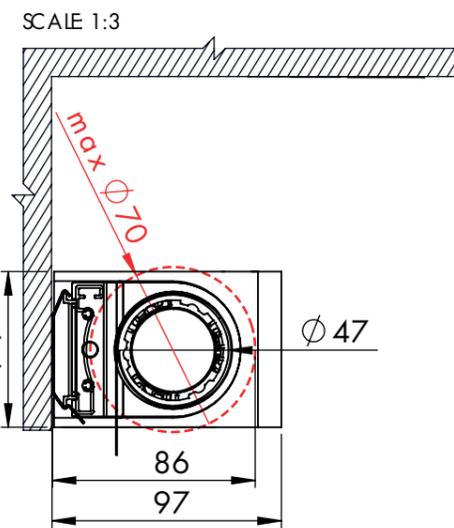

PARAMETERS



- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall)
- Control Side L (left) or R (right)
- Bottom bar FN..




FNB

CM


WM

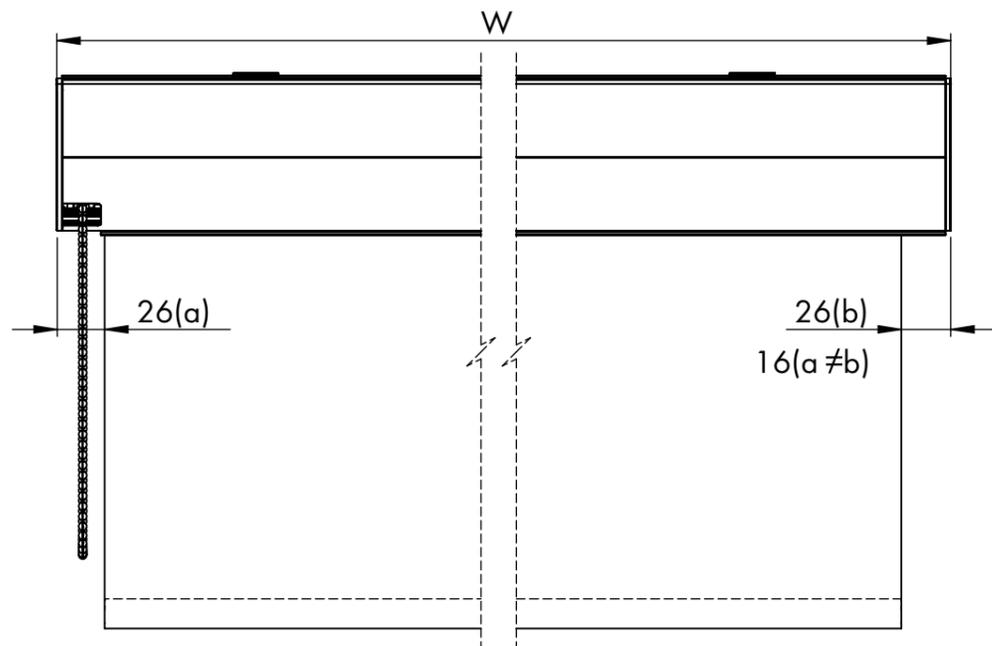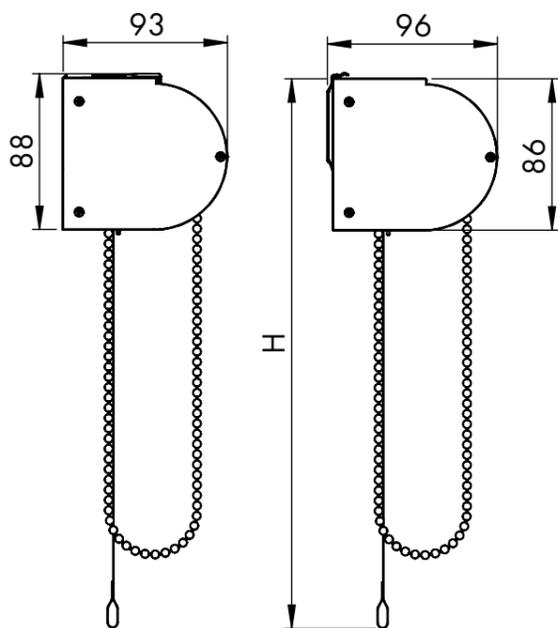


A

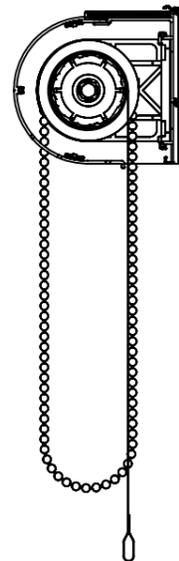

REN47 CHAIN

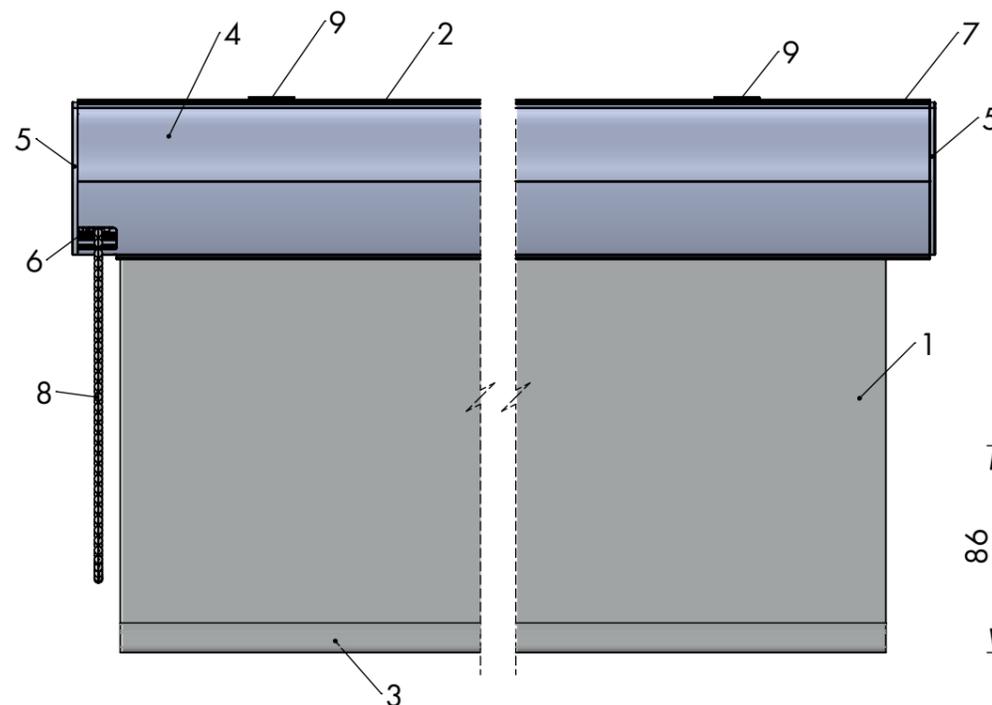



SCALE: 1:4

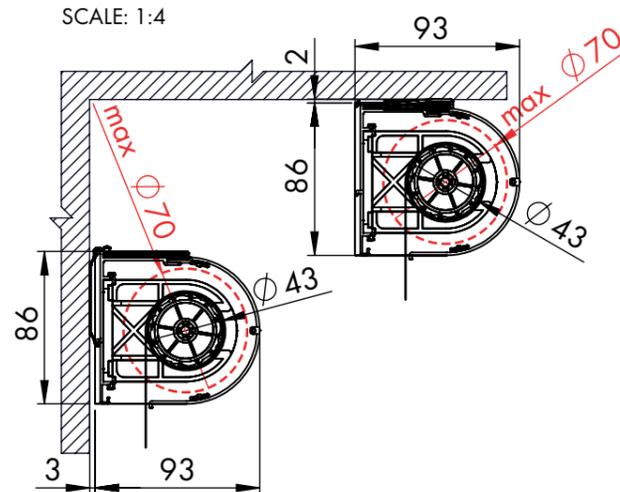

SCALE: 1:3

WM

CM



PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..
- Chain CH..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX43	tube
3	FIN..	bottom bar
4	86R	round box
5	SC..	side cover
6	CHM..	chain mechanism
7	EC..	end cup
8	CH..	chain
9	MC..	mounting clip




FINB


SCALE: 1:4

CM

WM


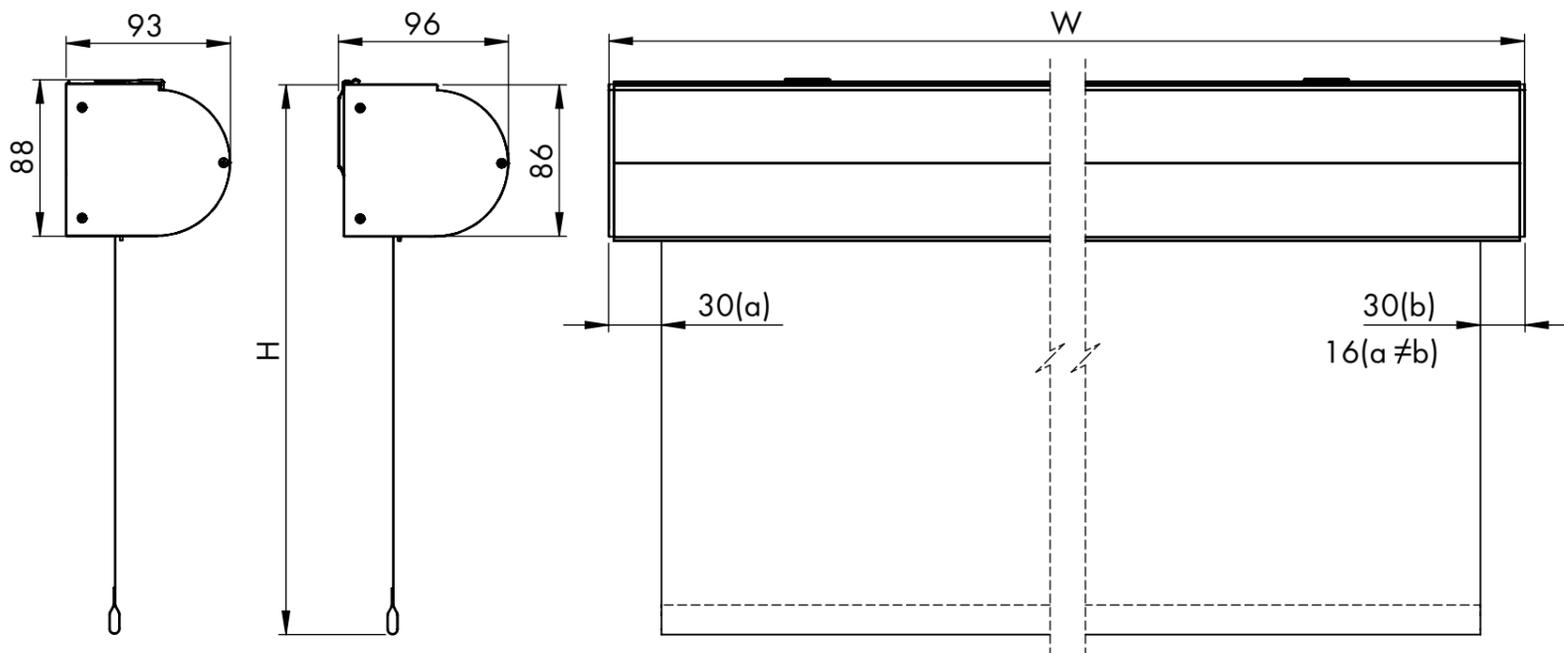


A

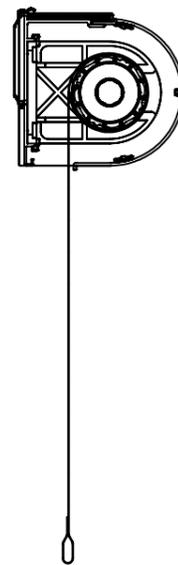

REN47


230V MOTOR SOMFY

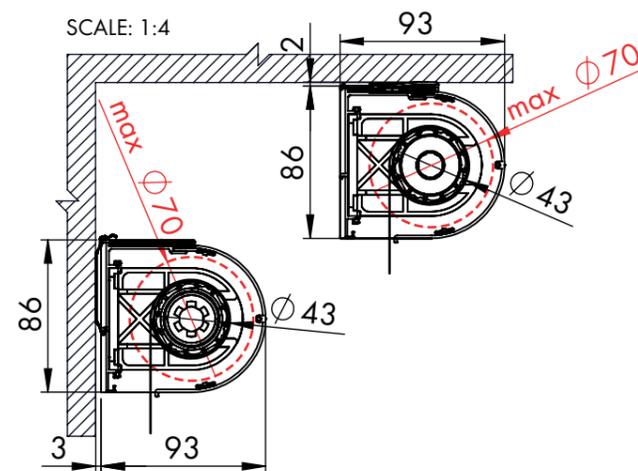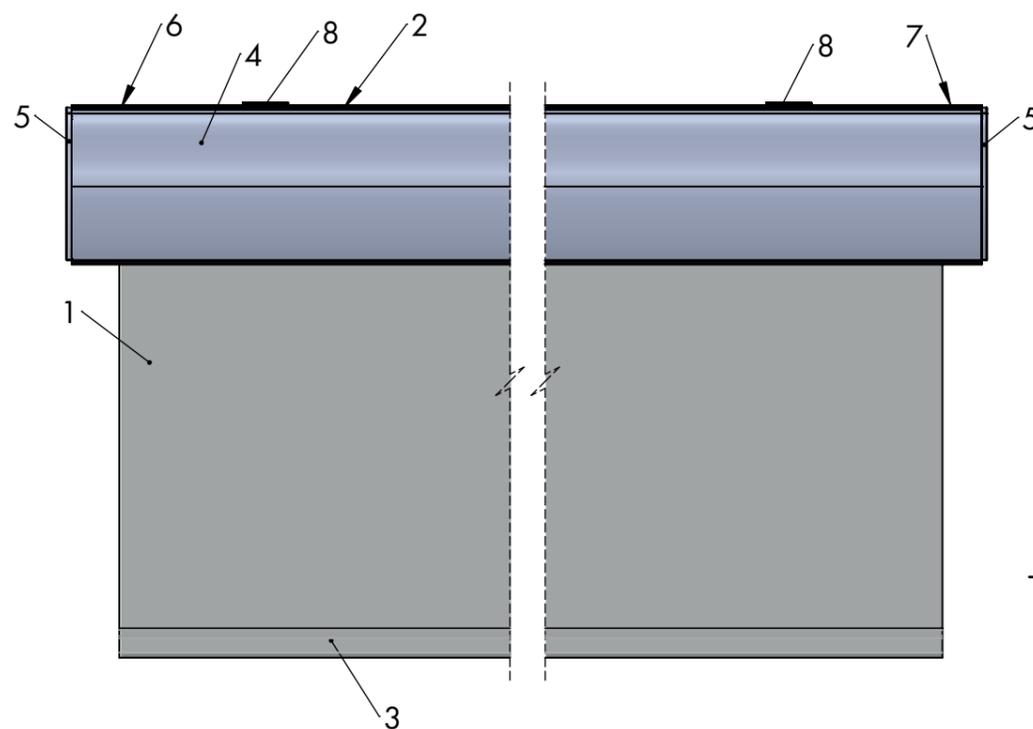

SCALE: 1:2

WM

CM

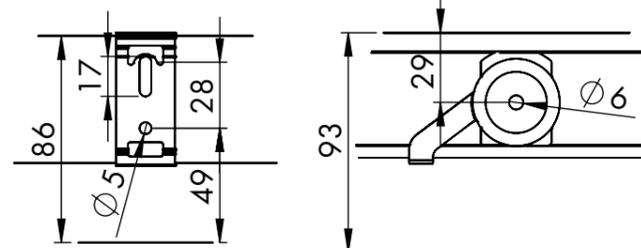

PARAMETERS



Width	W (in mm)
Height	H (in mm)
Fabric	F..
Unwinding	A
Mounting	WM (wall) or CM (ceiling)
Control Side	L (left) or R (right)
Bottom bar	FIN..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX43	tube
3	FIN..	bottom bar
4	86R	round box
5	SC..	side cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MC..	mounting clip







FINB

SCALE 1:3

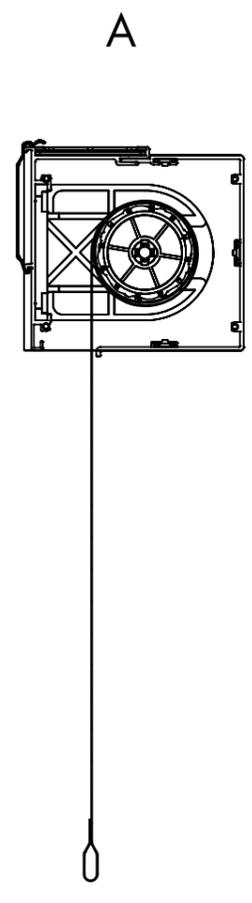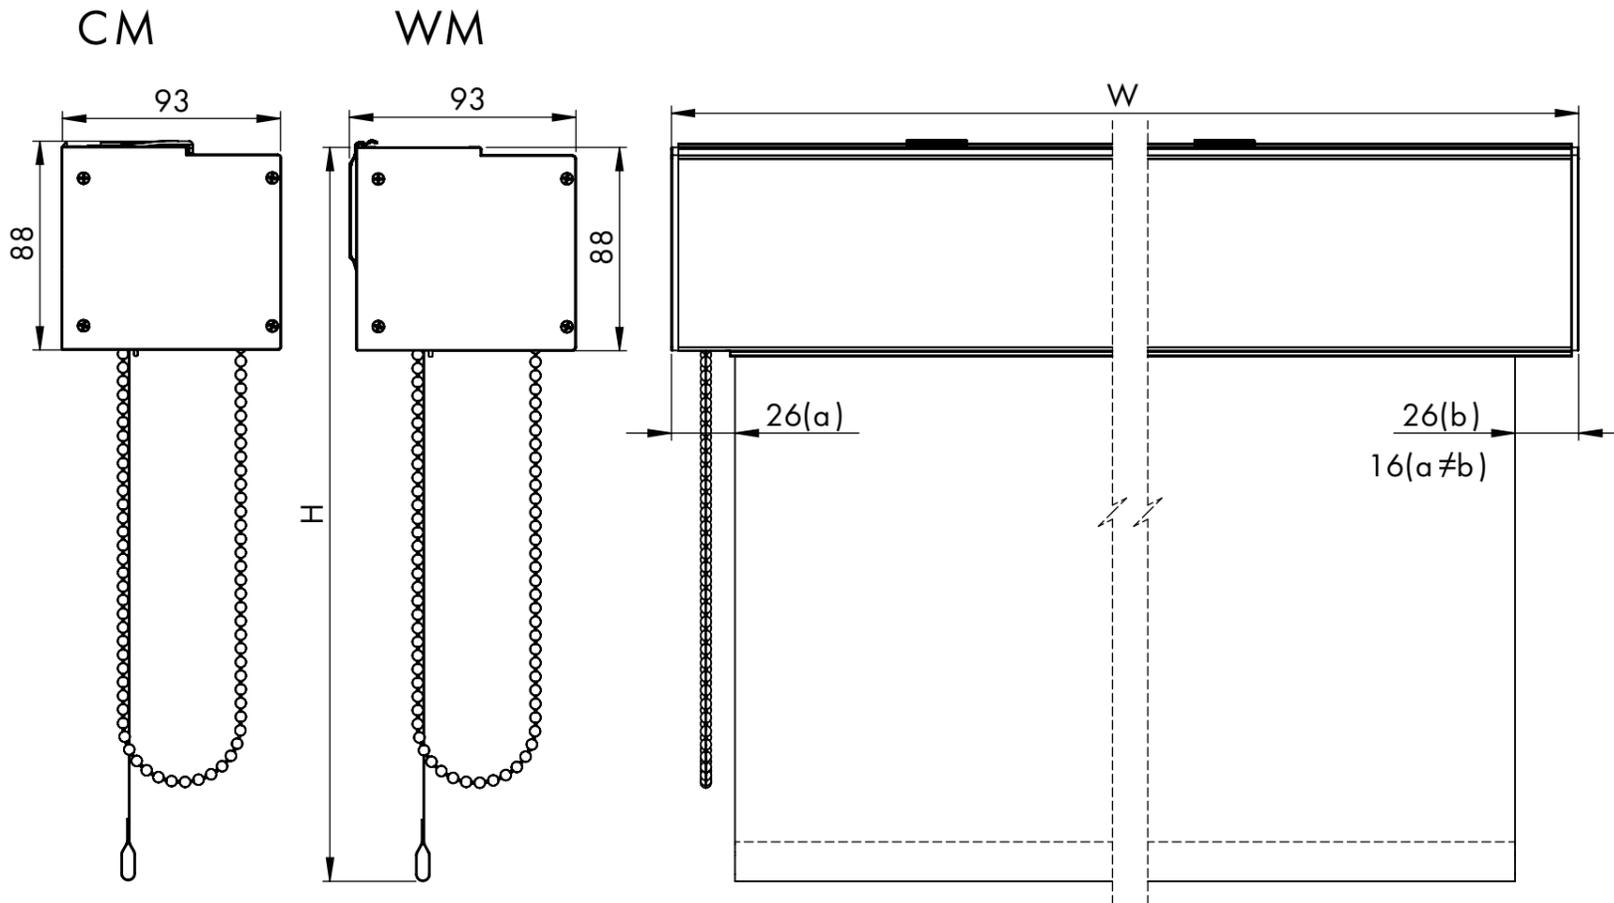

REN47 CHAIN

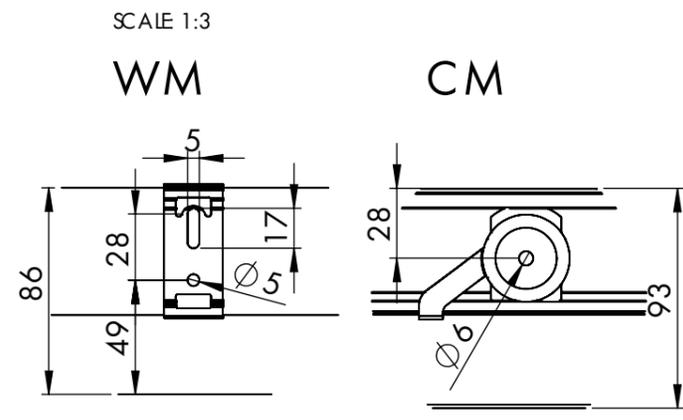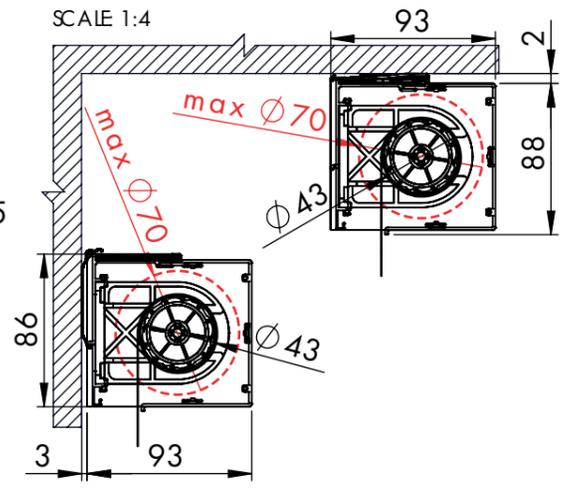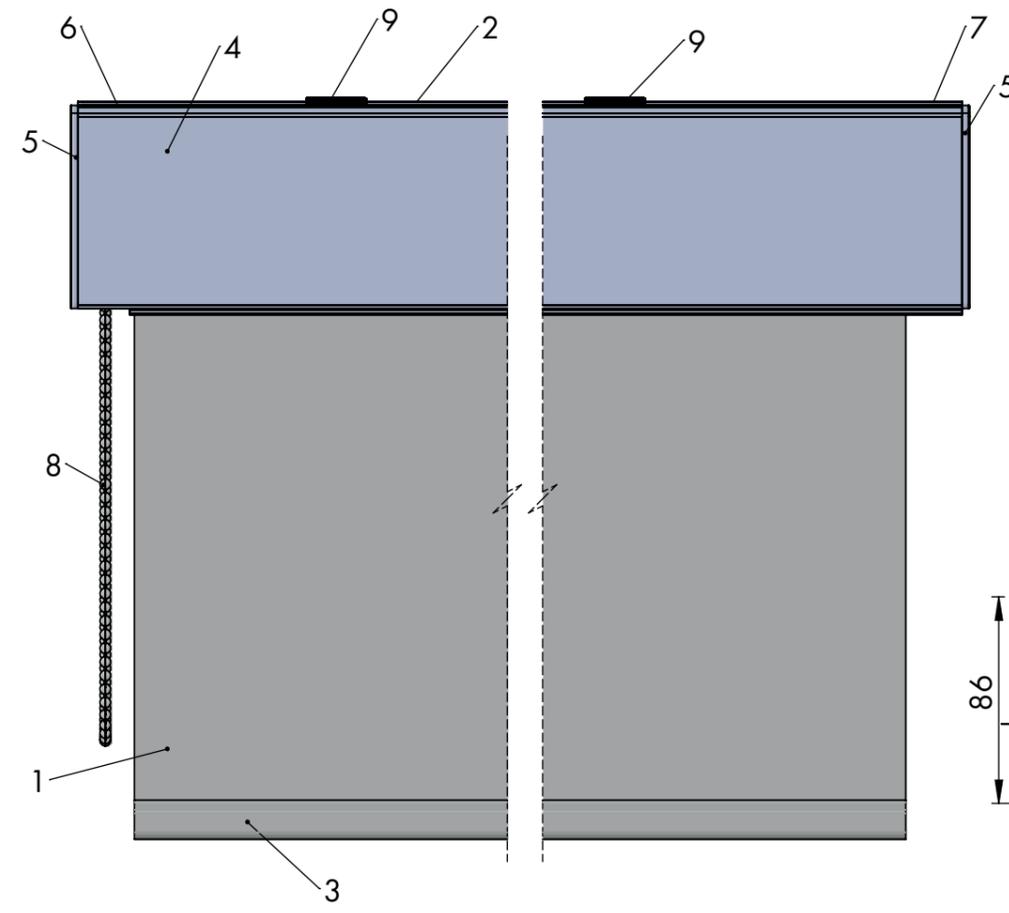

N	CODE	DESCRIPTION
1	F..	fabric
2	AX43	tube
3	FIN..	bottom bar
4	86S	square box
5	SC..	side cover
6	CHM..	chain mechanism
7	EC..	end cup
8	CH..	chain
9	MC..	mounting clip


PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..
- Chain CH..




FINB

SCALE: 1:4

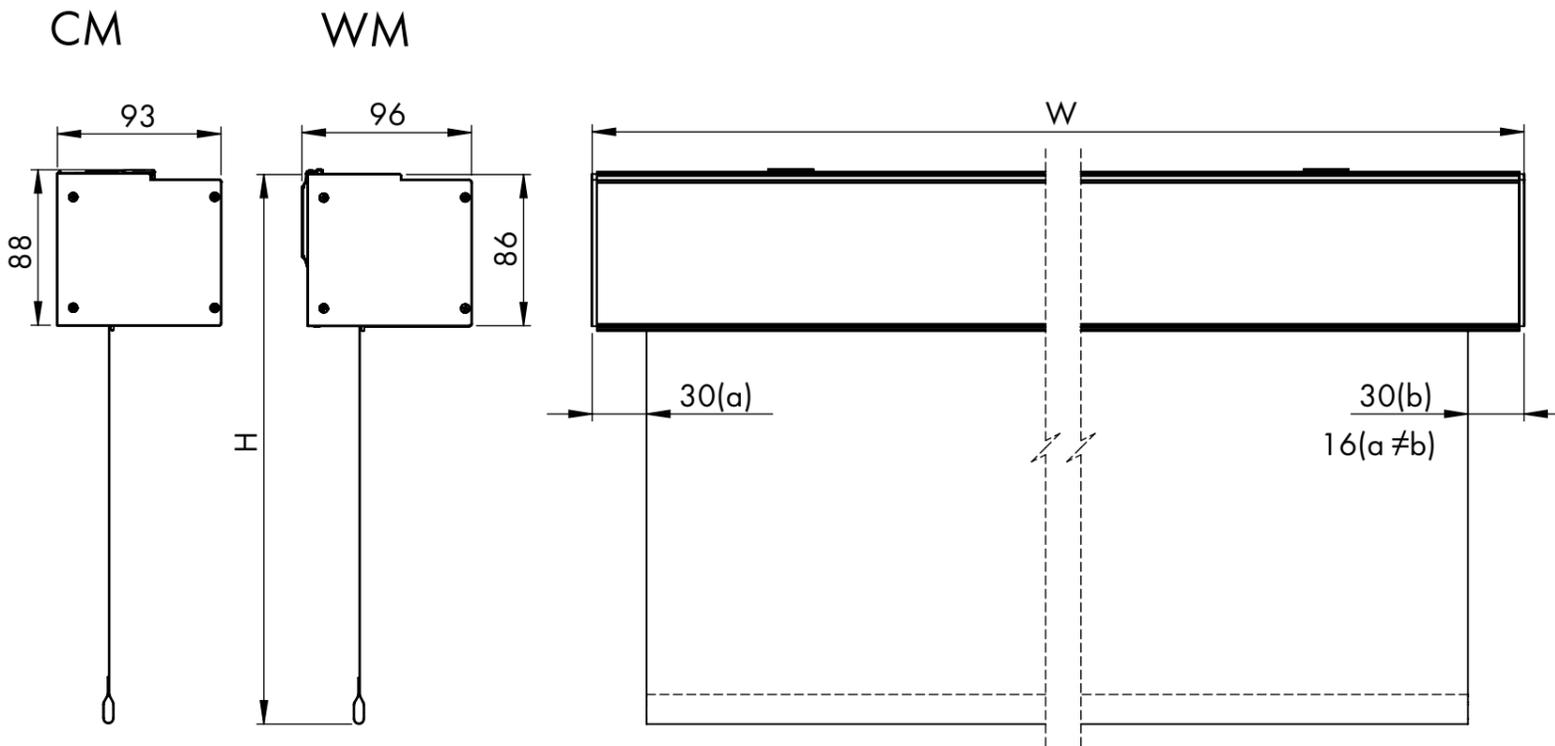

REN47

230V MOTOR SOMFY

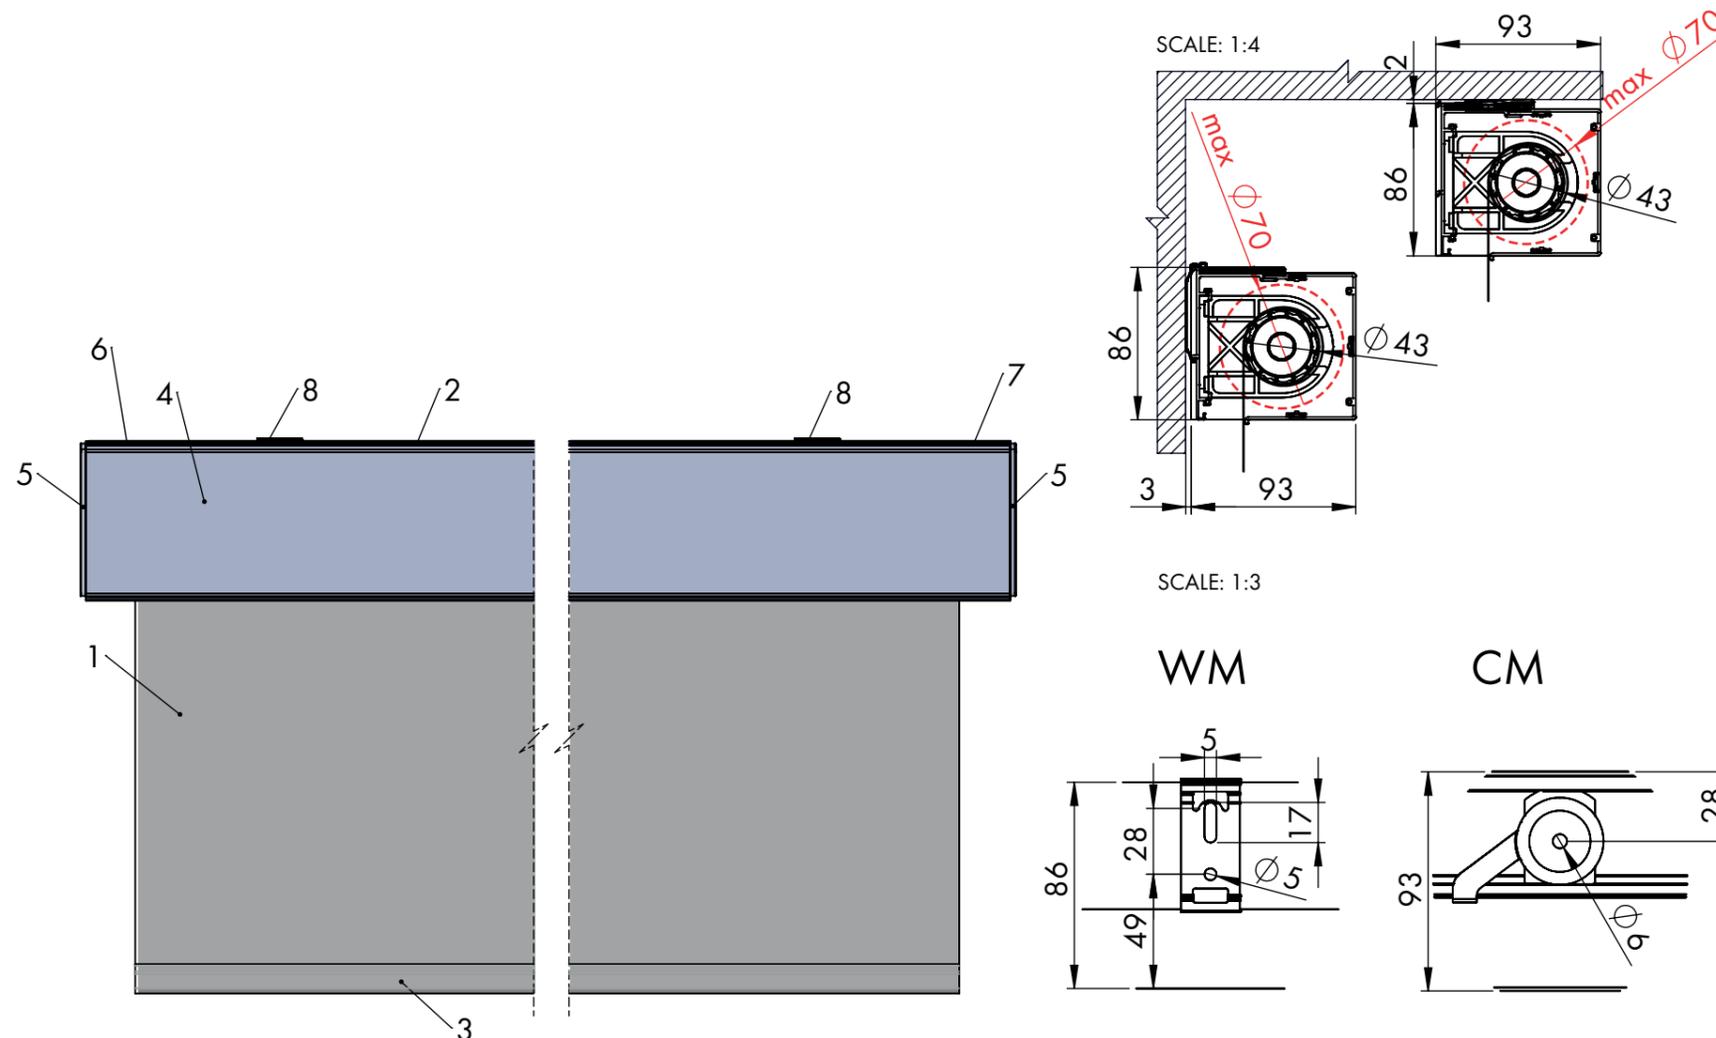

N	CODE	DESCRIPTION
1	F..	fabric
2	AX43	tube
3	FIN..	bottom bar
4	86S	square box
5	SC..	side cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MC..	mounting clip




PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..







FINB


SCALE: 1:4

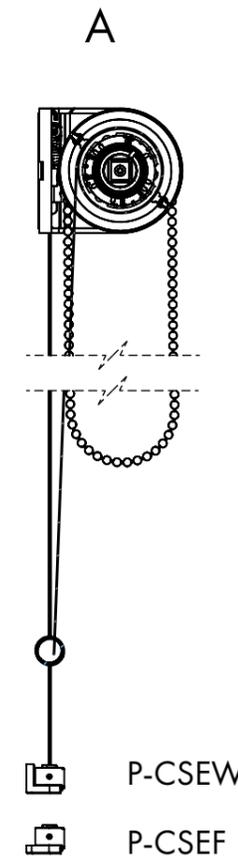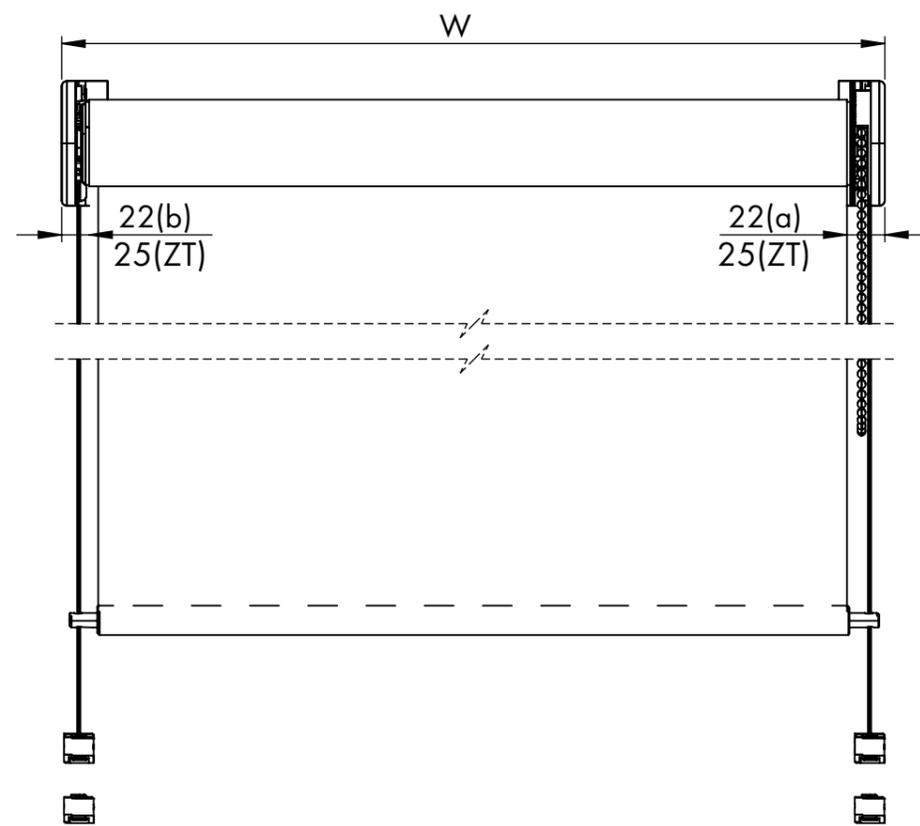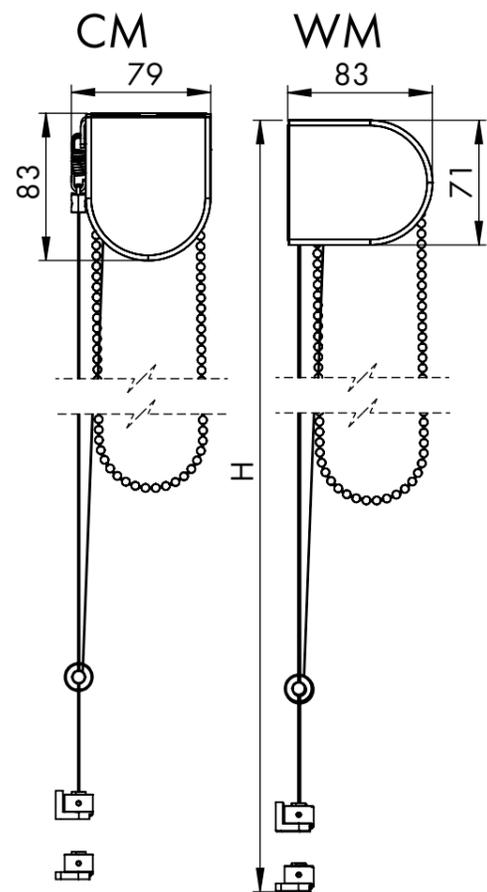

REN47 CHAIN

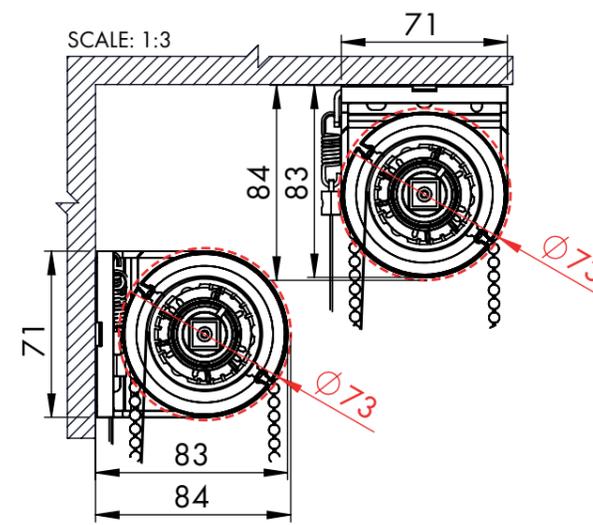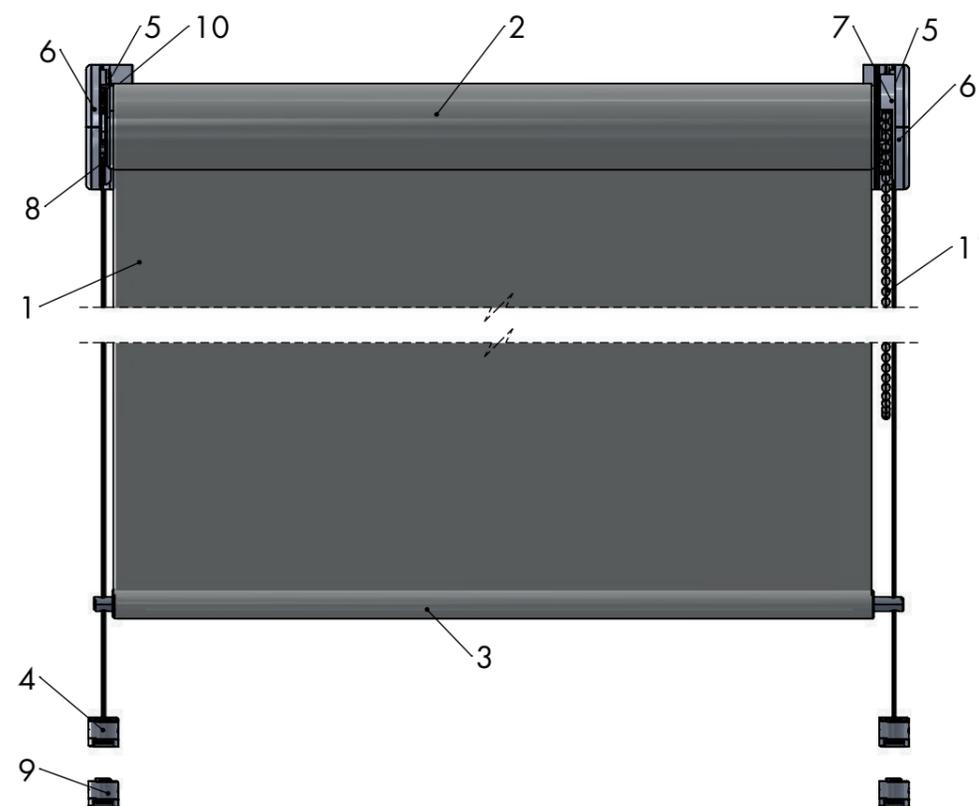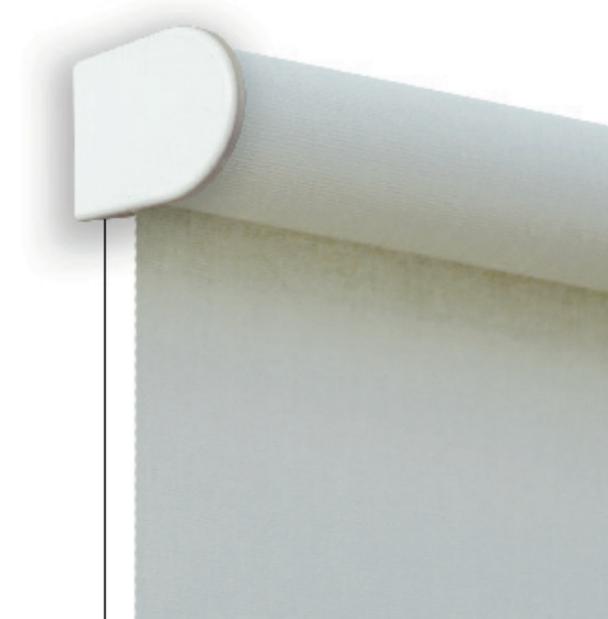

SCALE: 1:2

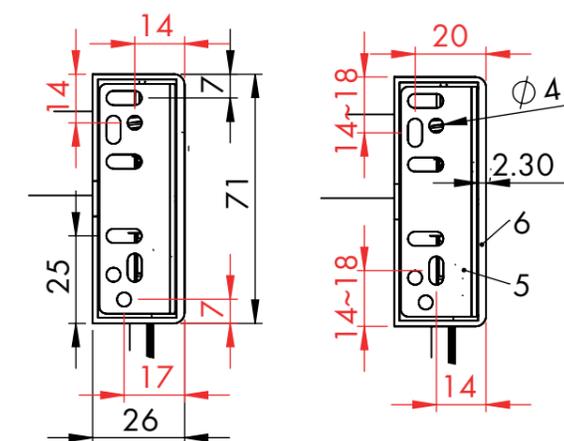

N	CODE	DESCRIPTION
1	F..	fabric
2	AX32	tube
3	FIN..	bottom bar
4	SGB..	sideguiding pin FIN
5	B..	bracket
6	BC..	bracket cover
7	CHM..	chain mechanism
8	SGT..	sideguiding top set
9	SGD..	sideguiding down bracket
10	EC..	end cup
11	CH..	chain




PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding only A
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..





FINB


SCALE: 1:4

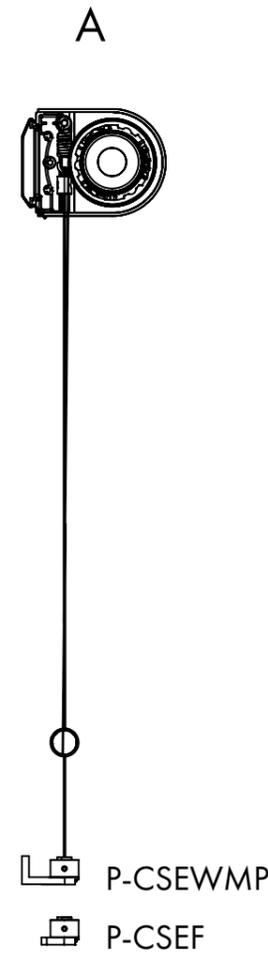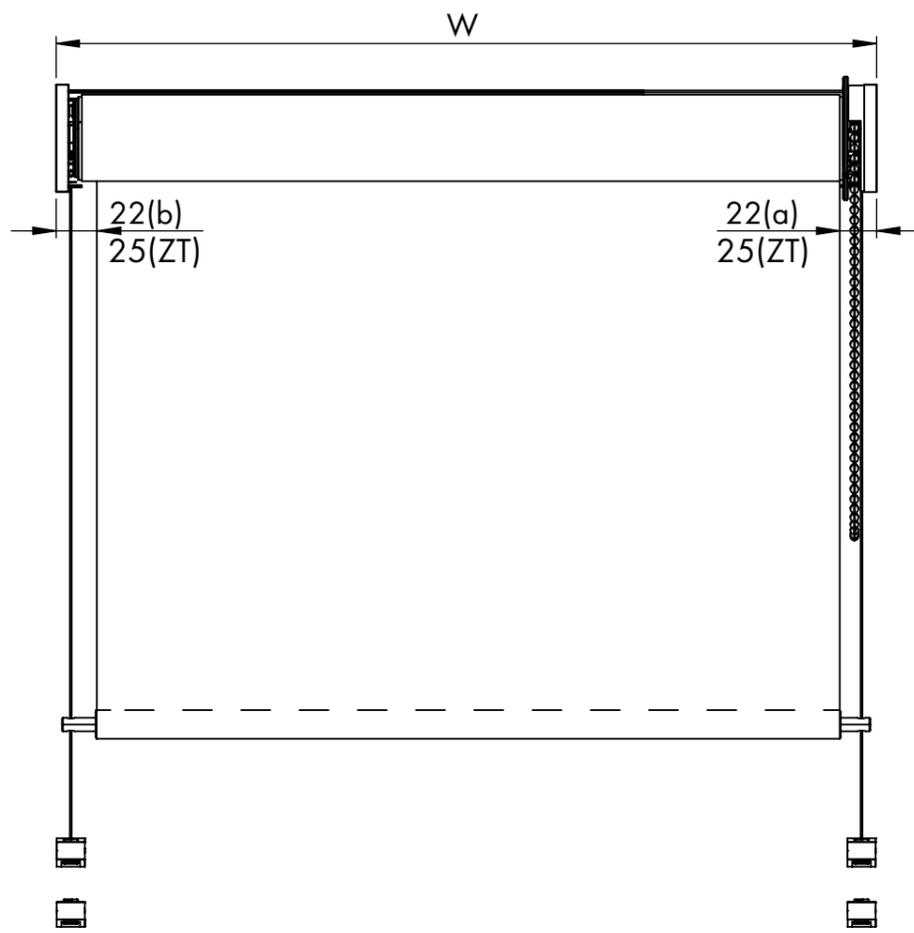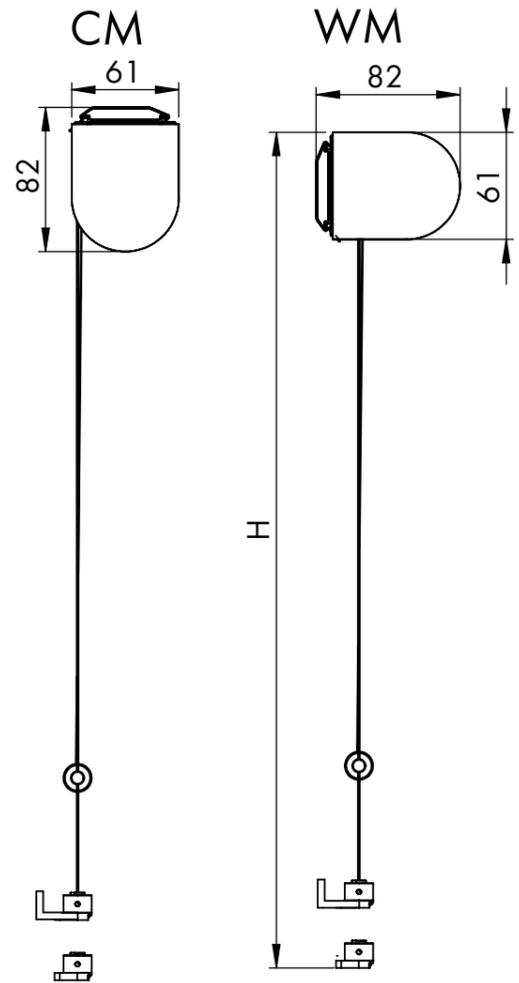

REN47 CHAIN

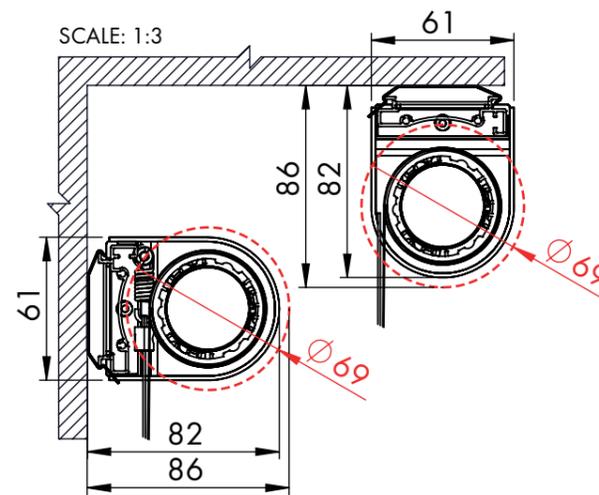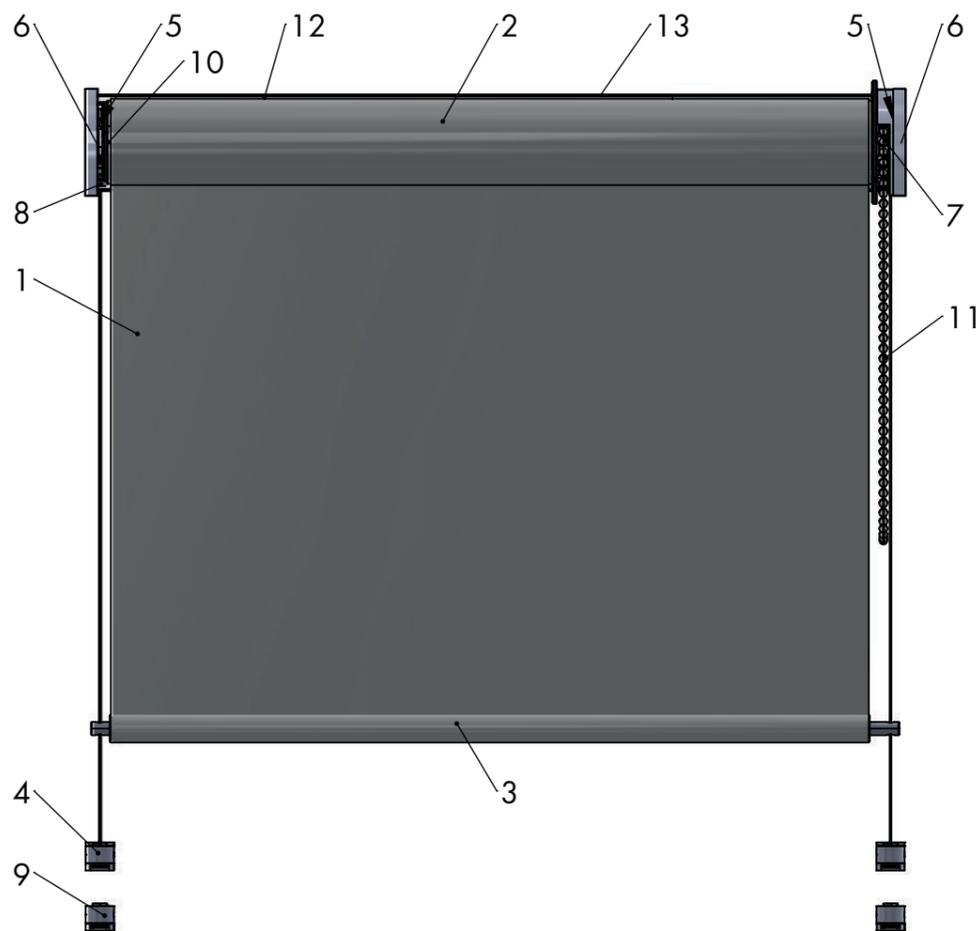

SCALE: 1:2



PARAMETERS




Width	W (in mm)
Height	H (in mm)
Fabric	F..
Unwinding	only A
Mounting	WM (wall) or CM (ceiling)
Control Side	L (left) or R (right)
Bottom bar	FIN..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX32	tube
3	FIN..	bottom bar
4	SGB..	sideguiding pin FIN
5	B..	bracket
6	BC..	bracket cover
7	CHM..	chain mechanism
8	SGT..	sideguiding top set
9	SGD..	sideguiding down bracket
10	EC..	end cup
11	CH..	chain
12	MP..	mounting profile
13	MC..	mounting clip







FINB

SCALE: 1:4

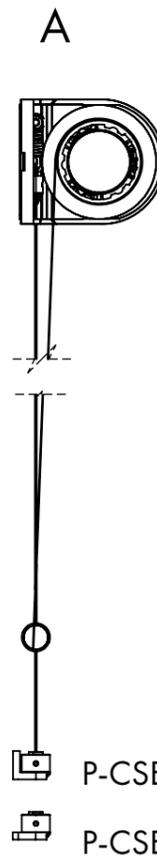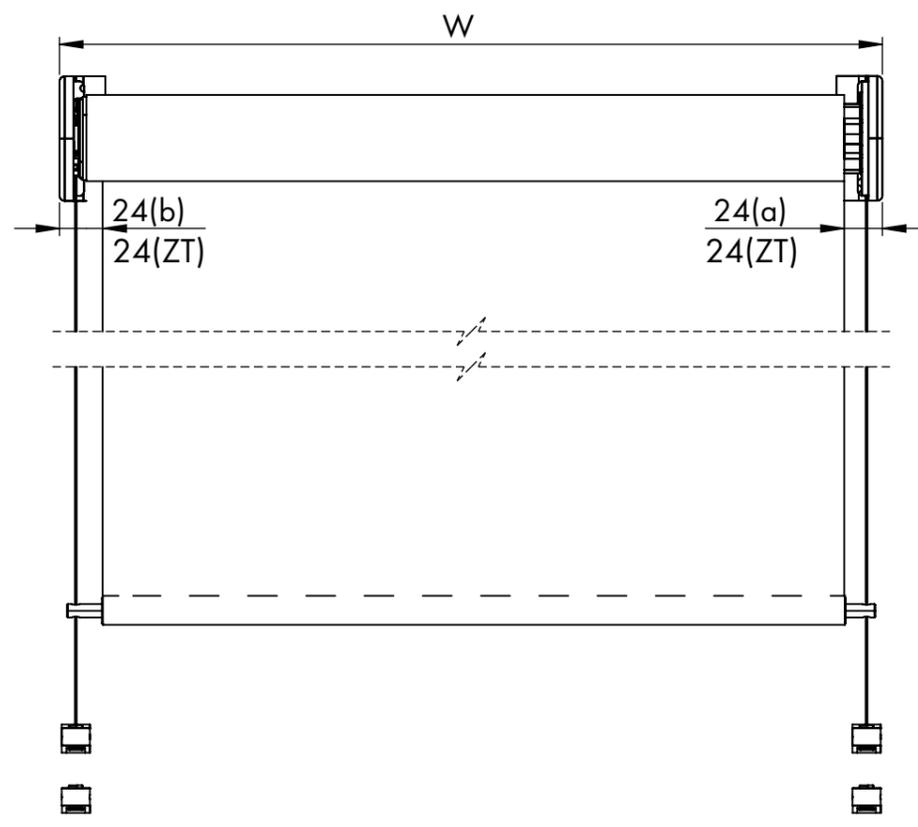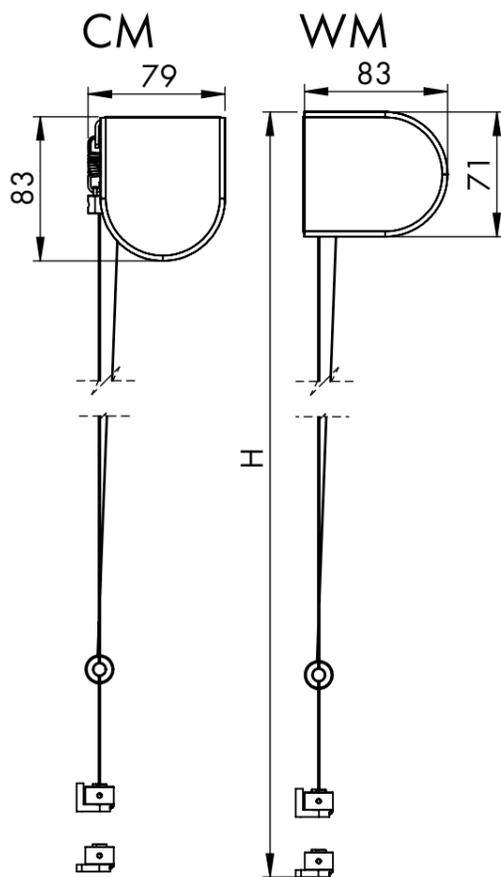

REN47

ACCU MOTOR SOMFY RTS

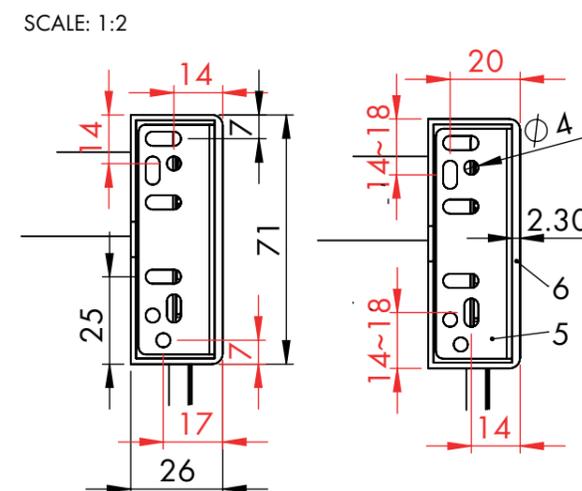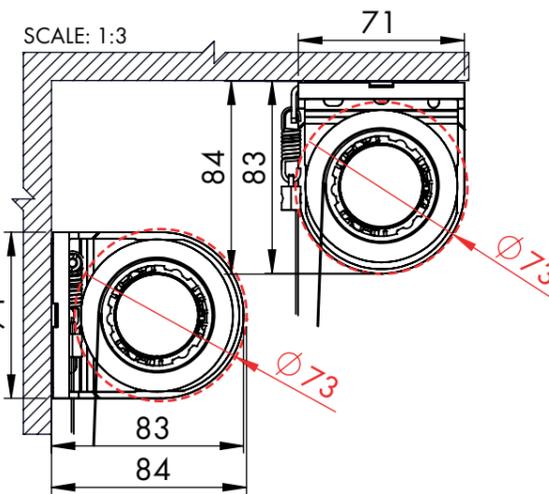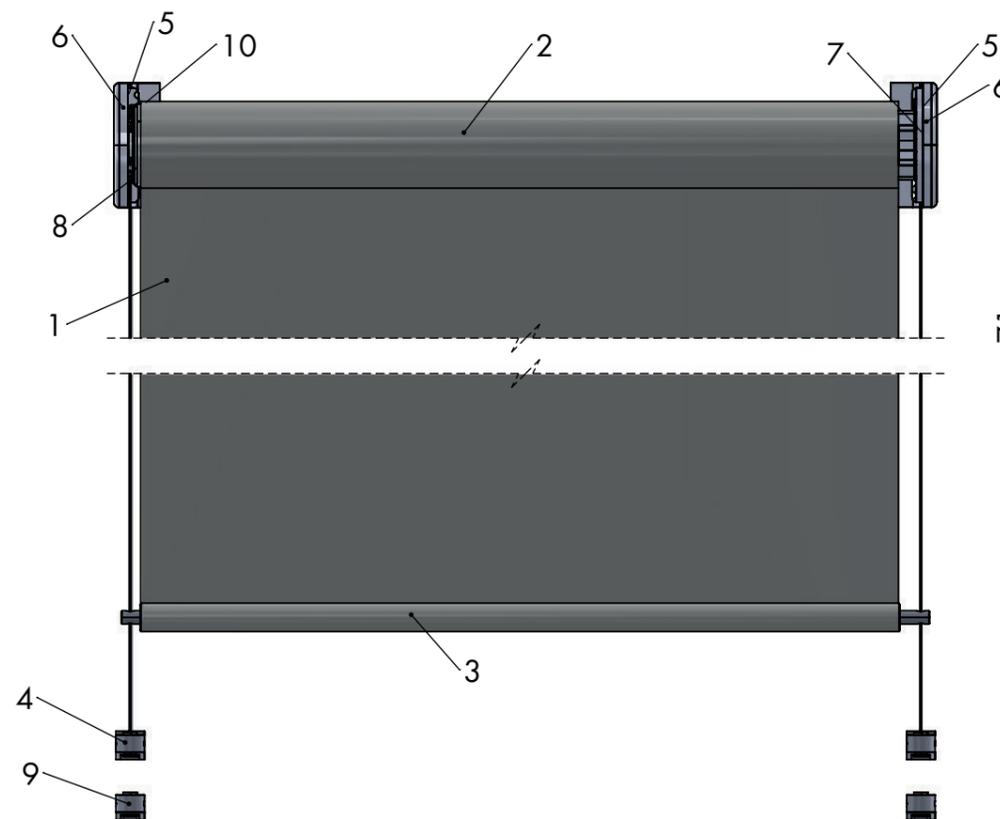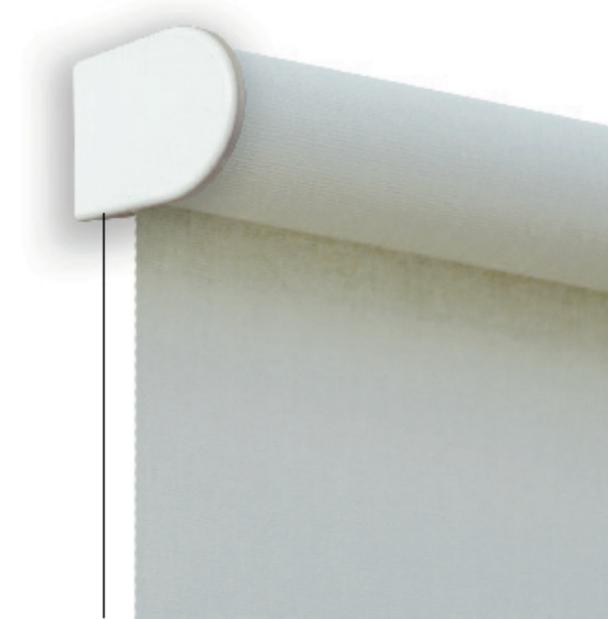

N	CODE	DESCRIPTION
1	F..	fabric
2	AX32	tube
3	FIN..	bottom bar
4	SGB..	sideguiding pin FIN
5	B..	bracket
6	BC..	bracket cover
7	MOT..	motor + adapter
8	SGT..	sideguiding top set
9	SGD..	sideguiding down bracket
10	EC..	end cup




PARAMETERS

Width W (in mm)
 Height H (in mm)
 Fabric F..
 Unwinding only A
 Mounting WM (wall) or CM (ceiling)
 Control Side L (left) or R (right)
 Bottom bar FIN..







FINB

SCALE: 1:4

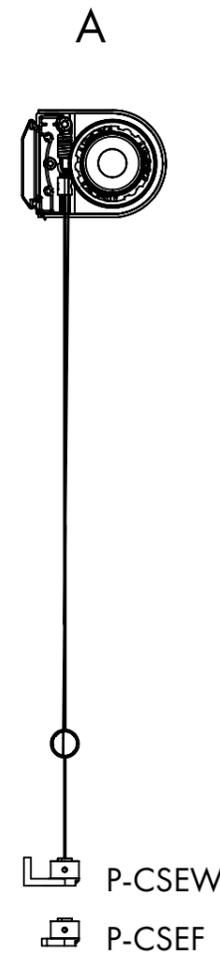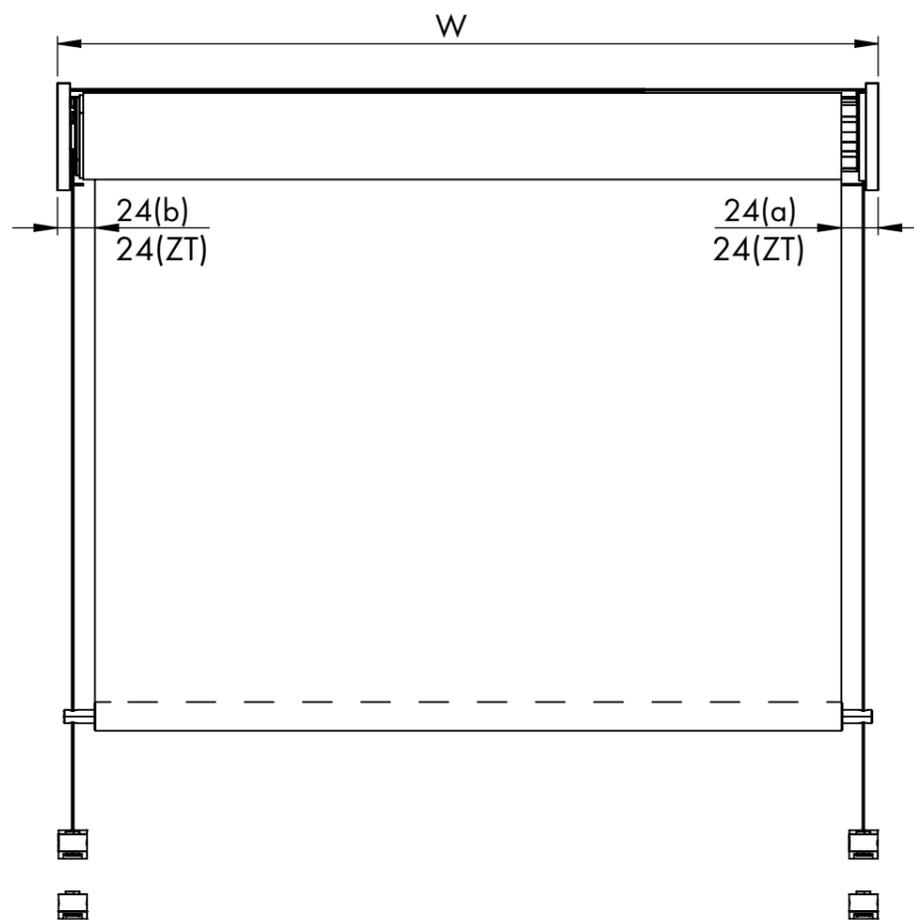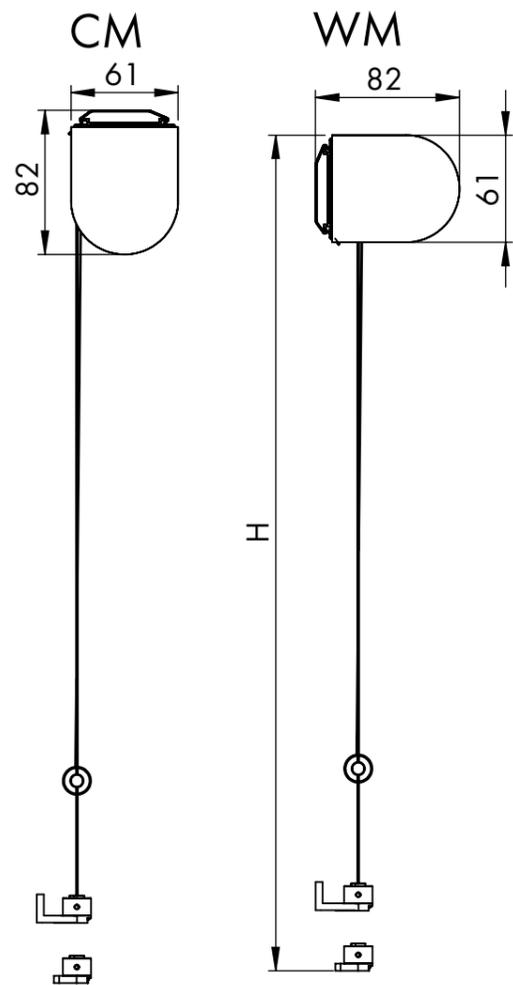


REN47

ACCU MOTOR SOMFY RTS

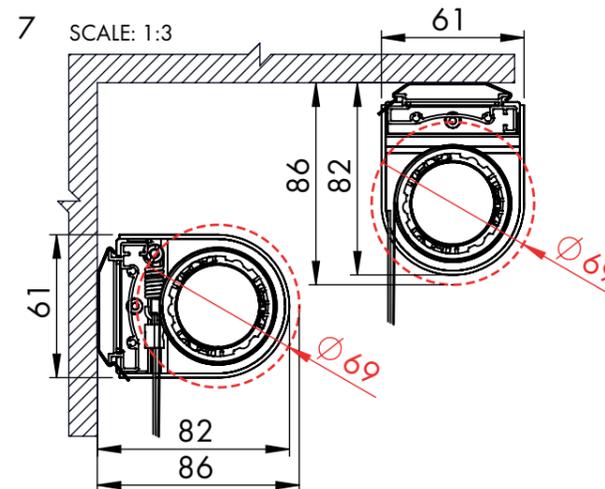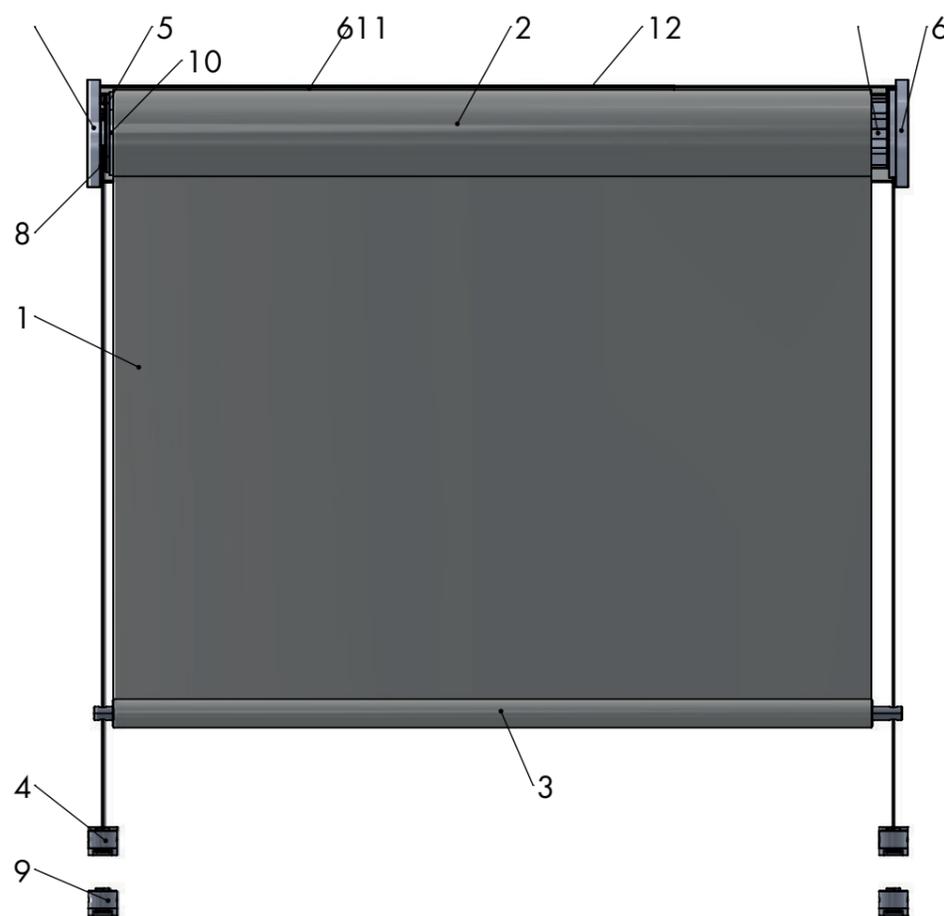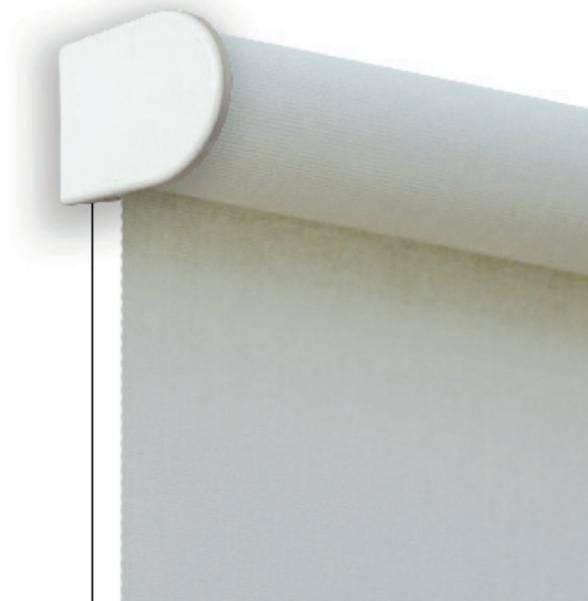

SCALE: 1:2



N	CODE	DESCRIPTION
1	F..	fabric
2	AX32	tube
3	FIN..	bottom bar
4	SGB..	sideguiding pin FIN
5	B..	bracket
6	BC..	bracket cover
7	MOT..	motor + adapter
8	SGT..	sideguiding top set
9	SGD..	sideguiding down bracket
10	EC..	end cup
11	MP..	mounting profile
12	MC..	mounting clip




PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding only A
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..






FINB

SCALE: 1:4

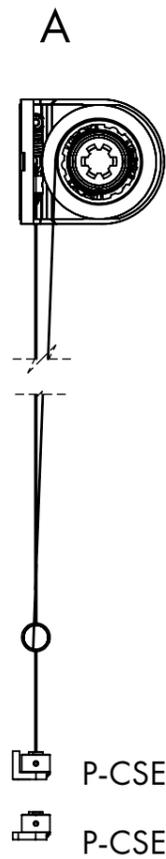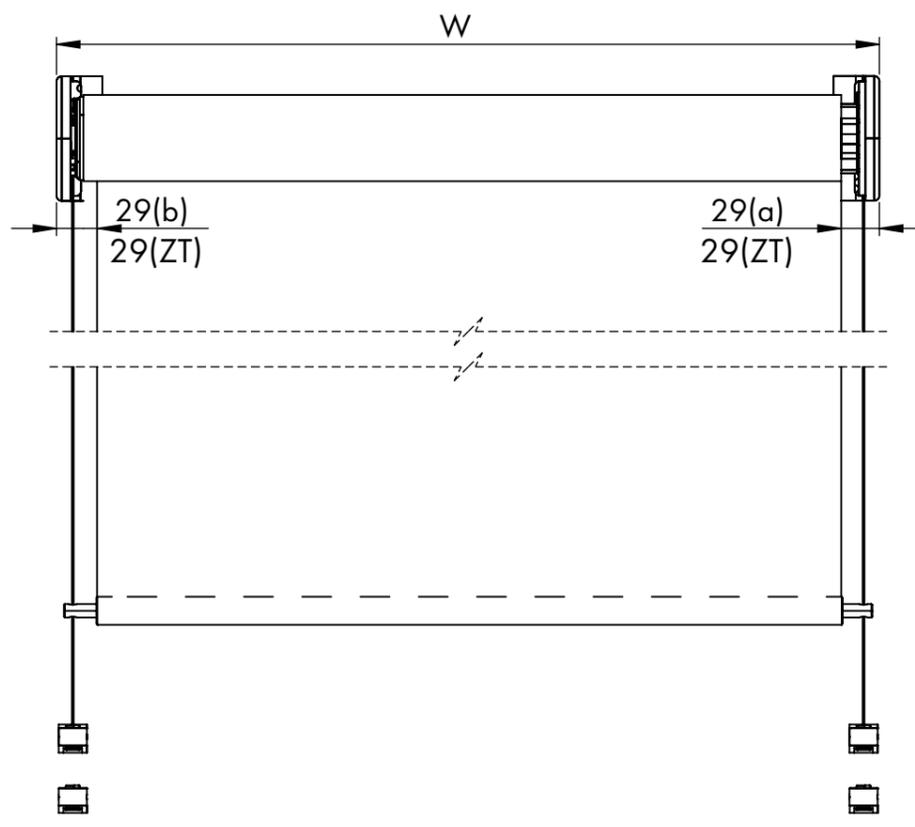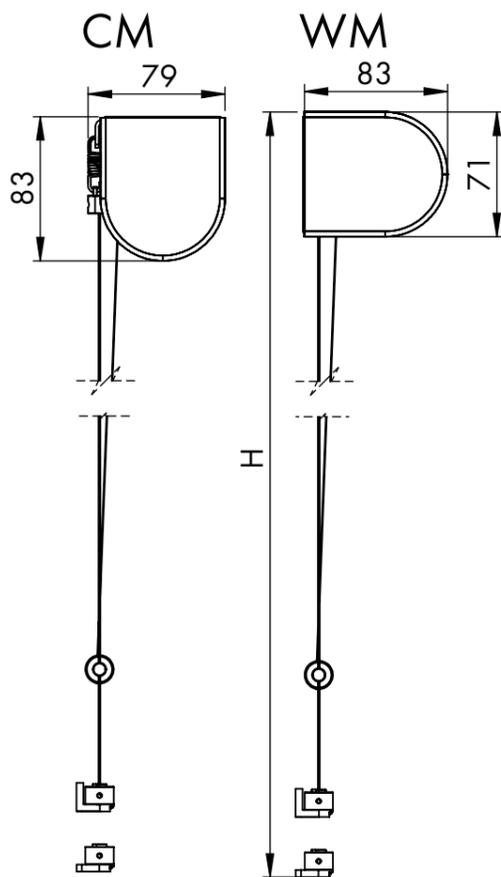

REN47

230V MOTOR SOMFY

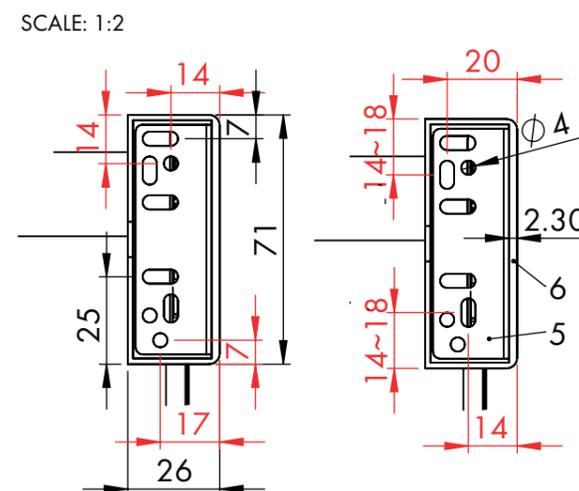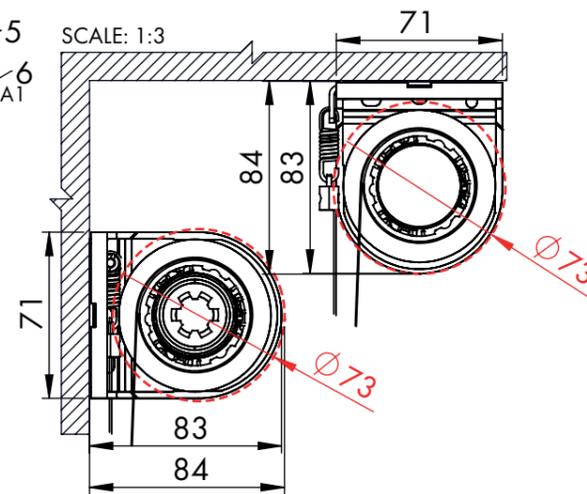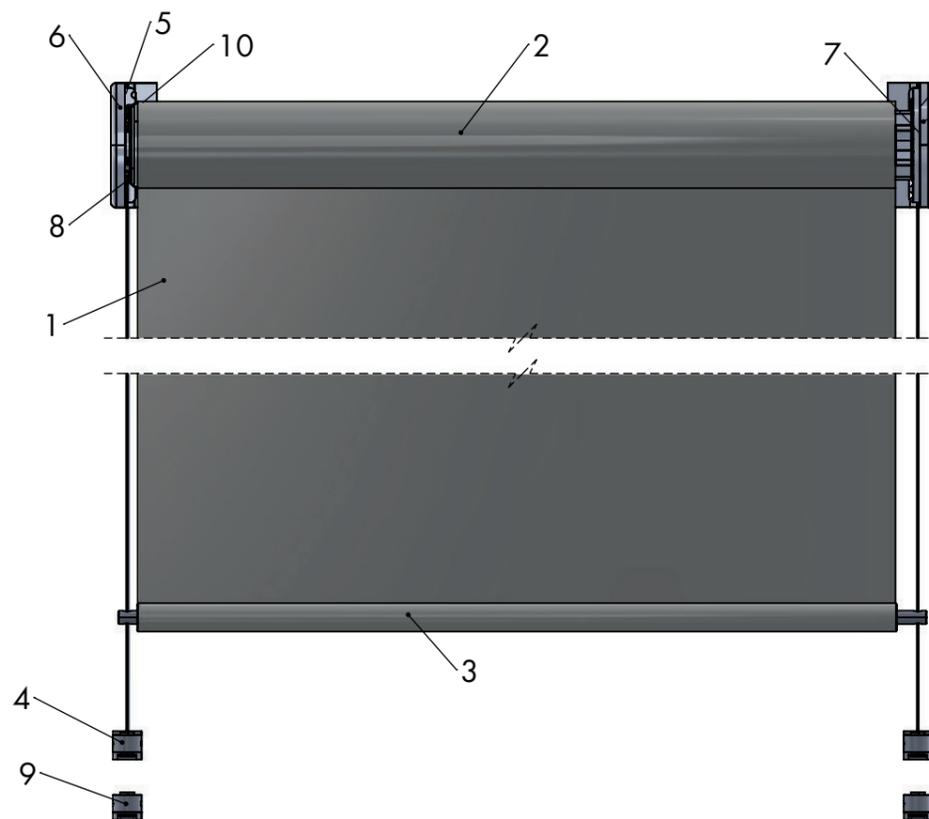

N	CODE	DESCRIPTION
1	F..	fabric
2	AX32	tube
3	FIN..	bottom bar
4	SGB..	sideguiding pin FIN
5	B..	bracket
6	BC..	bracket cover
7	MOT..	motor + adapter
8	SGT..	sideguiding top set
9	SGD..	sideguiding down bracket
10	EC..	end cup




PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding only A
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..






FINB

SCALE: 1:4

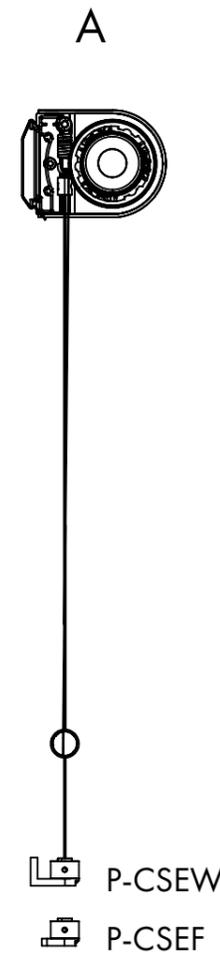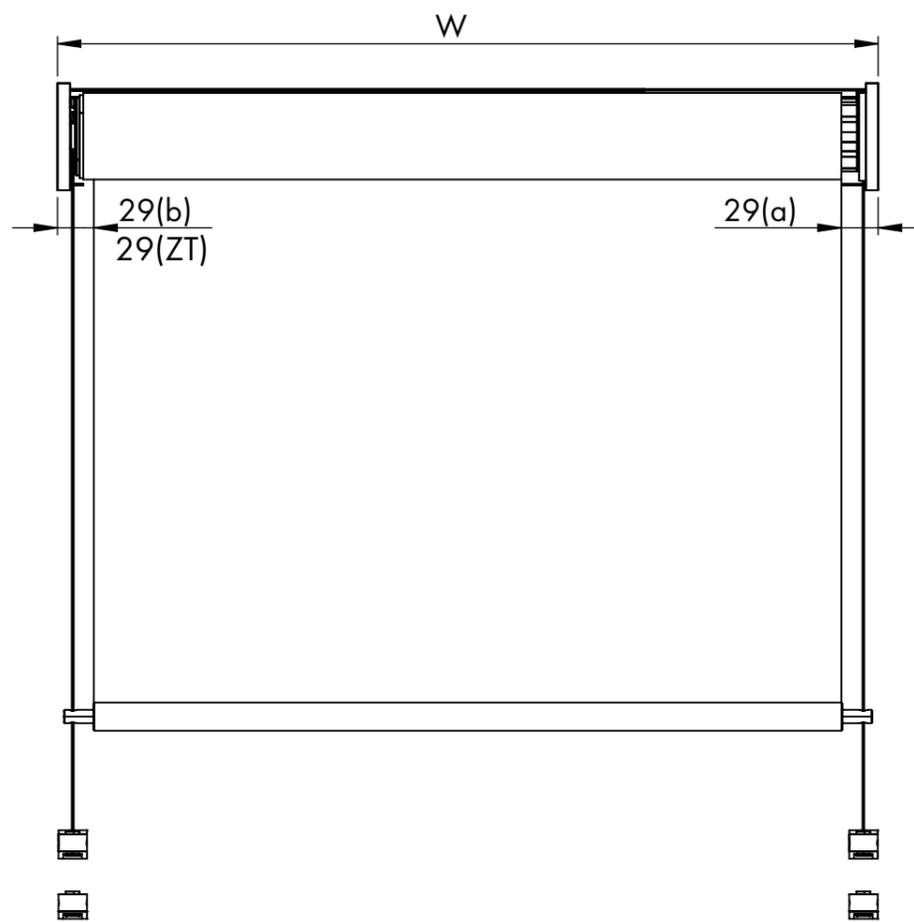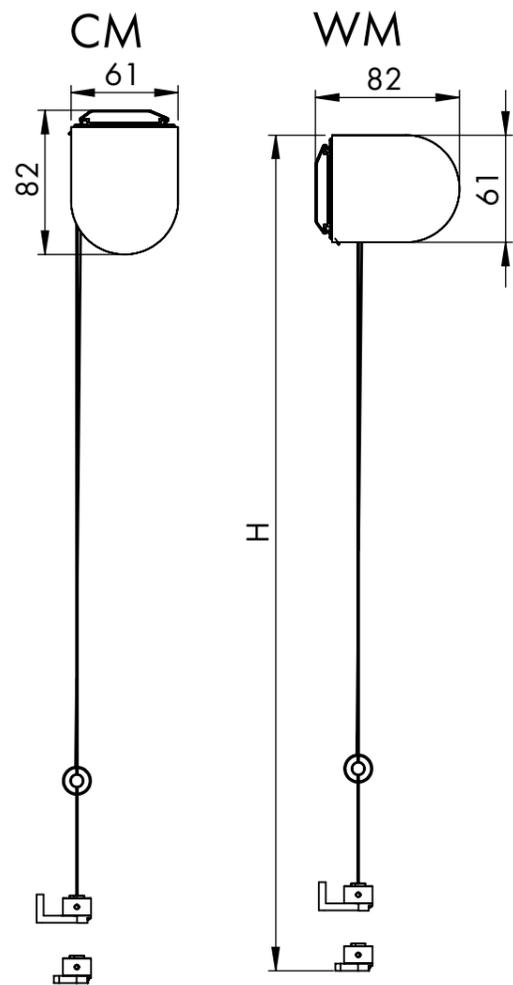

REN47

230V MOTOR SOMFY

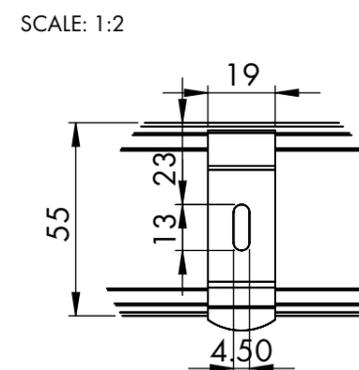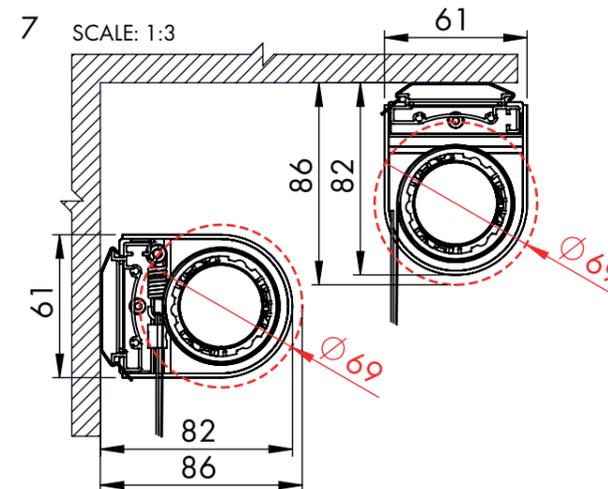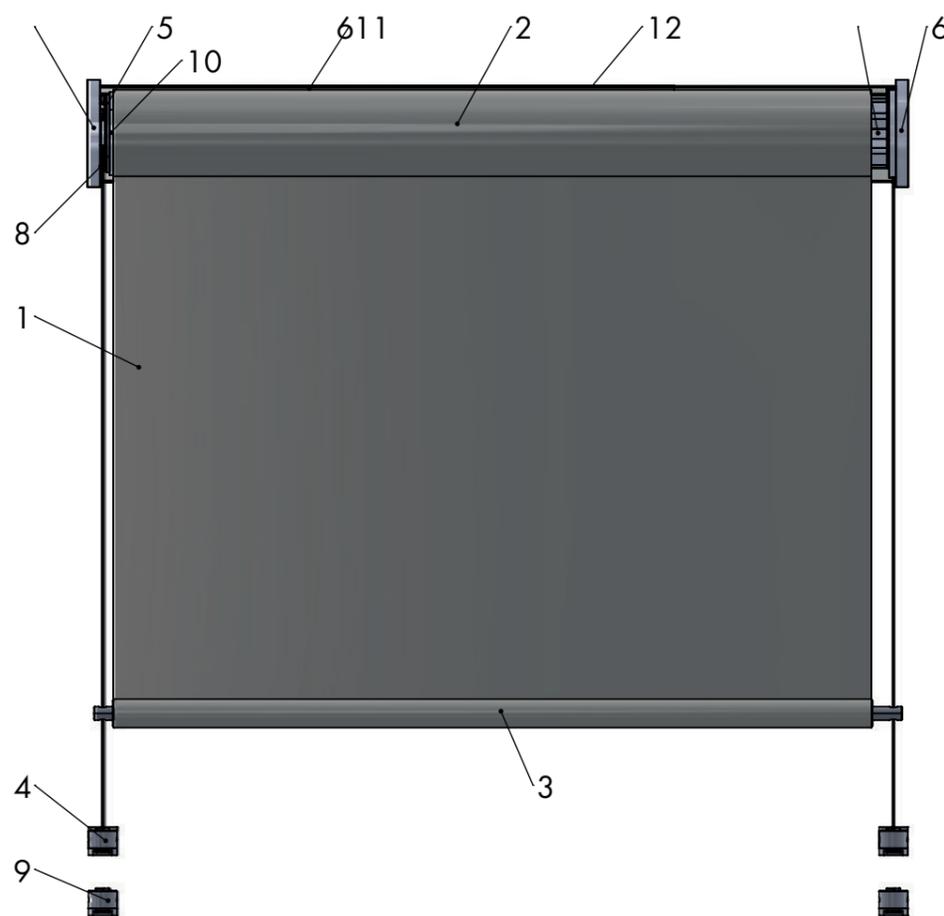

N	CODE	DESCRIPTION
1	F..	fabric
2	AX32	tube
3	FIN..	bottom bar
4	SGB..	sideguiding pin FIN
5	B..	bracket
6	BC..	bracket cover
7	MOT..	motor + adapter
8	SGT..	sideguiding top set
9	SGD..	sideguiding down bracket
10	EC..	end cup
11	MP..	mounting profile
12	MC..	mounting clip




PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding only A
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..





FINB


SCALE: 1:4

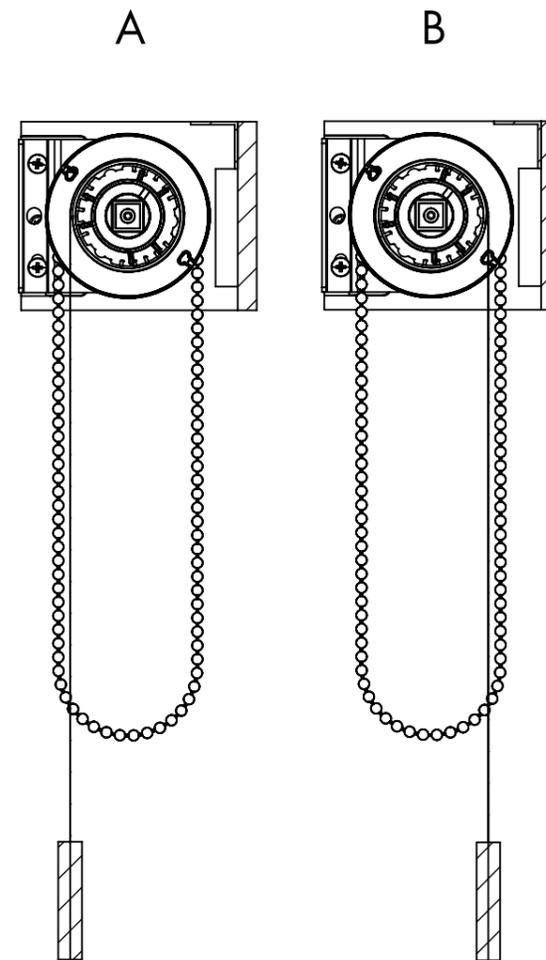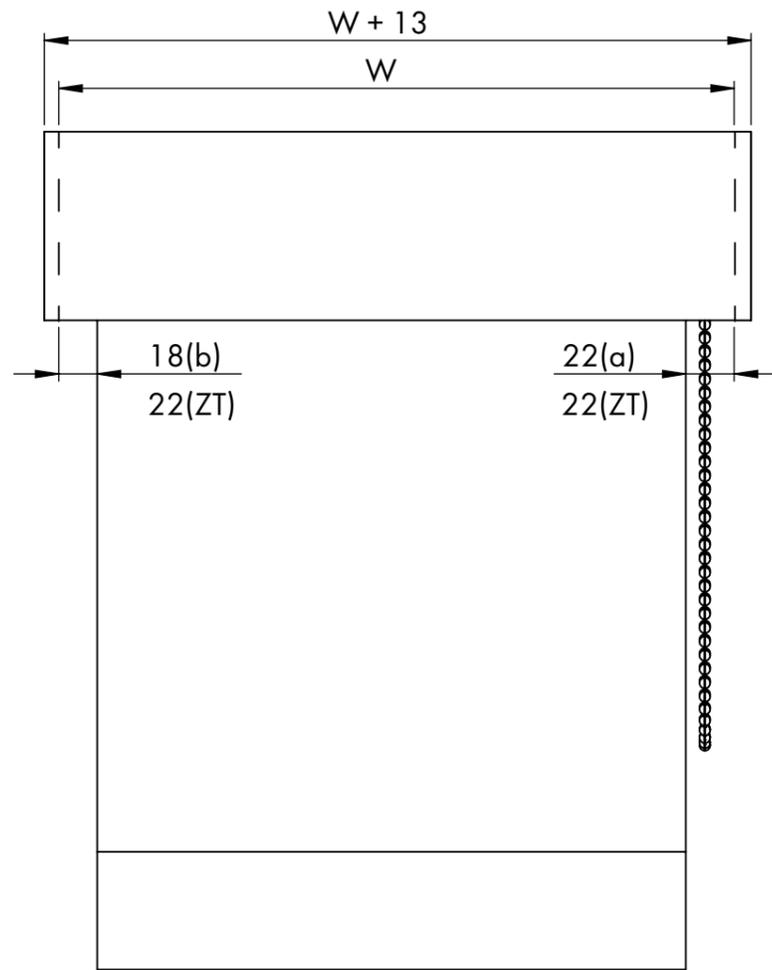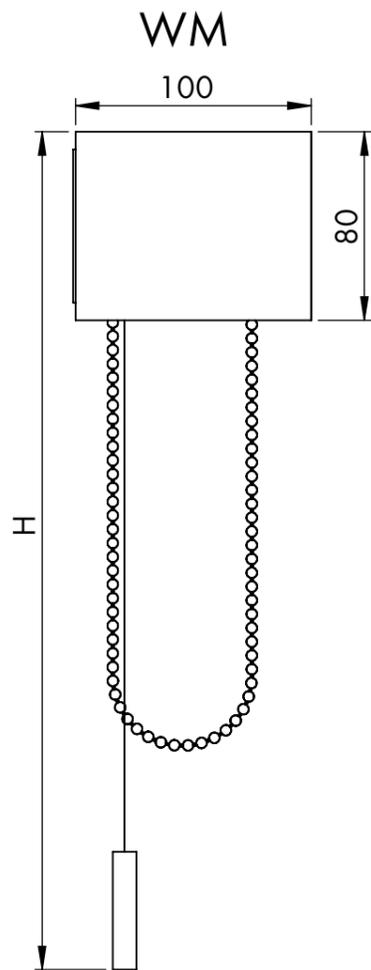


REN47 CHAIN

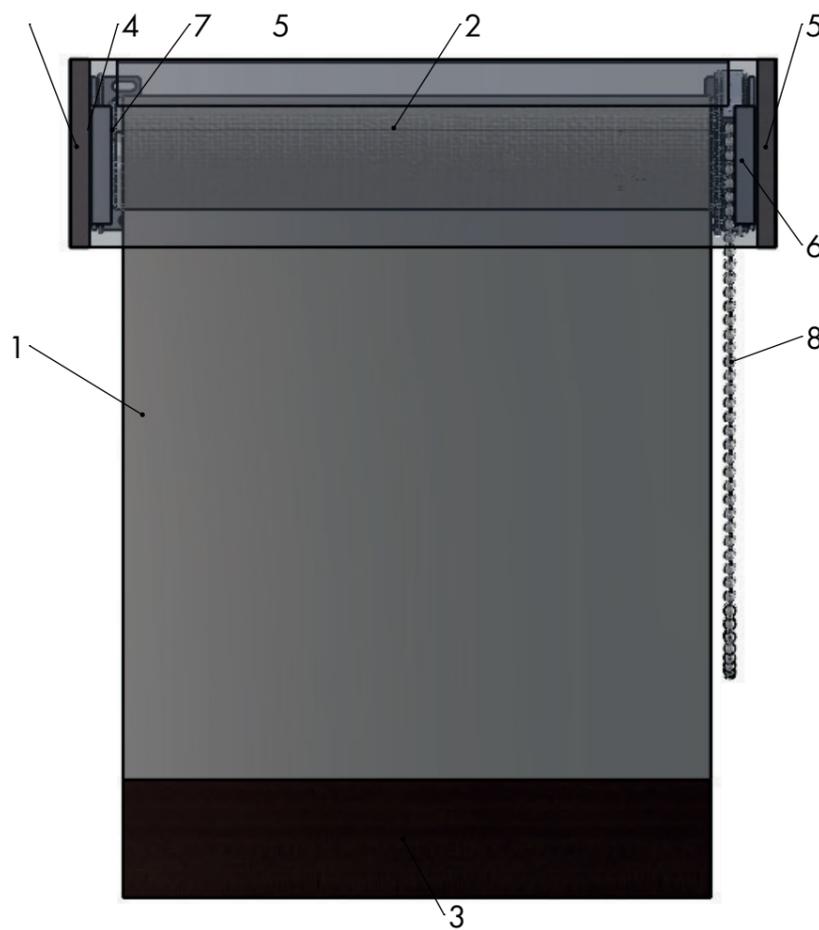

SCALE: 1:3

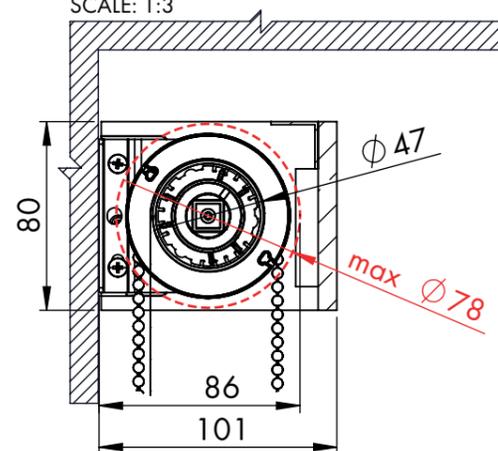


SCALE: 1:2

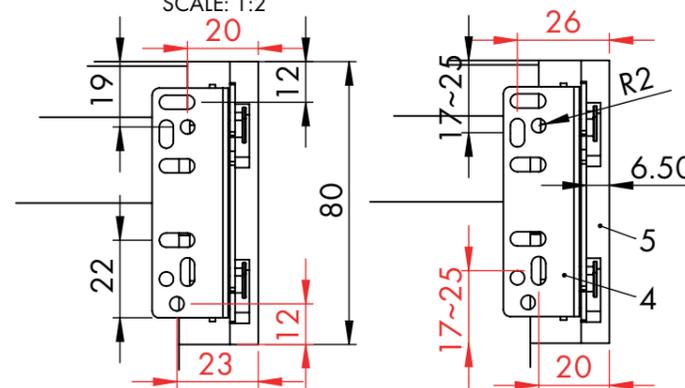

PARAMETERS




Width	W max 3400 mm
Height	H (in mm)
Fabric	F..
Unwinding	A or B (contra)
Mounting	WM (wall)
Control Side	L (left) or R (right)
Bottom bar	FIN..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX32	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	CHM..	chain mechanism
7	EC..	end cup
8	CH..	chain






FINW50

SCALE: 1:4

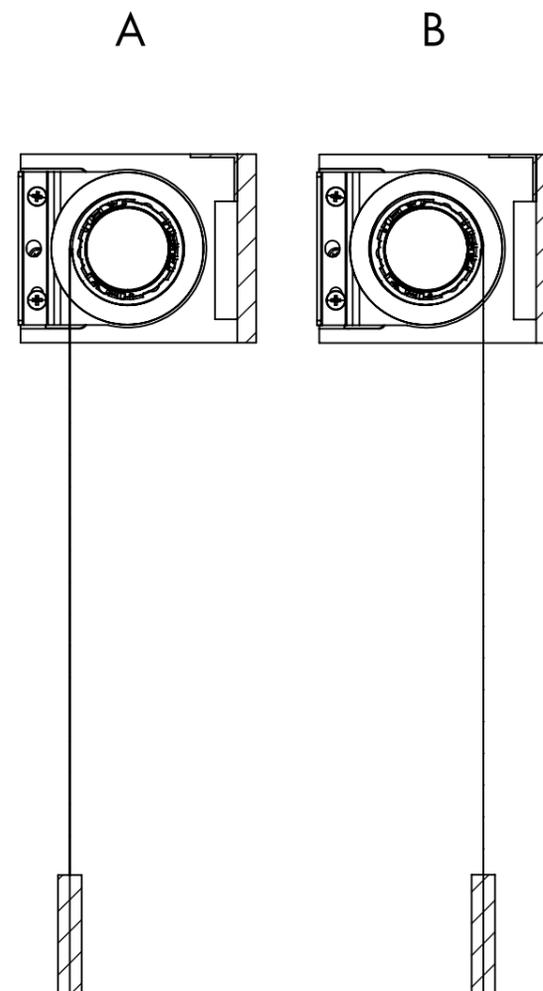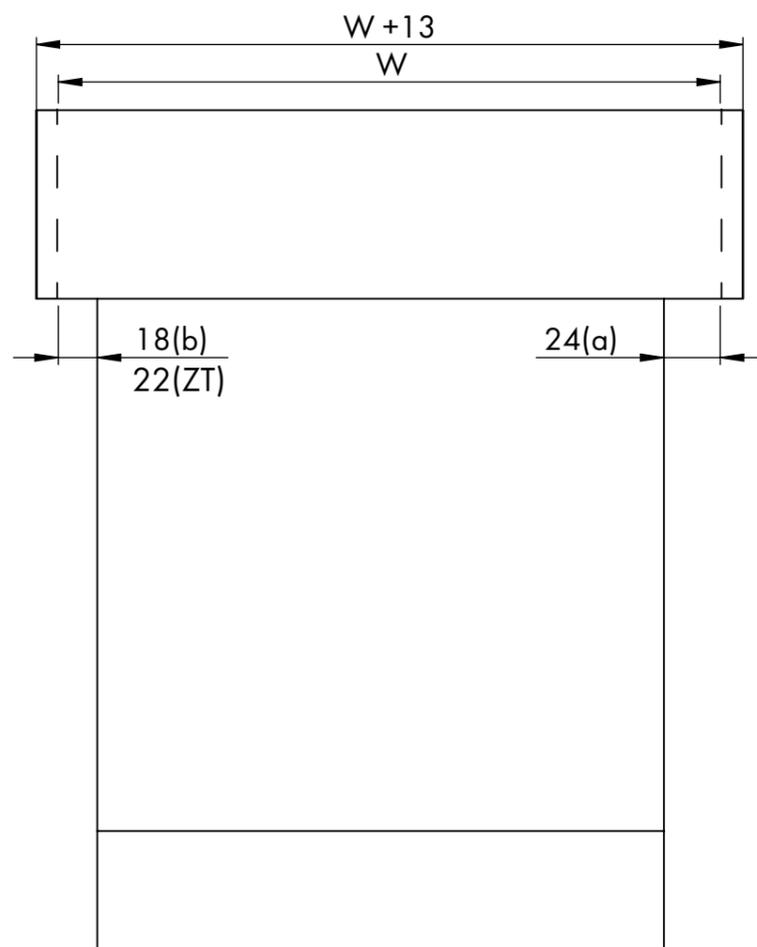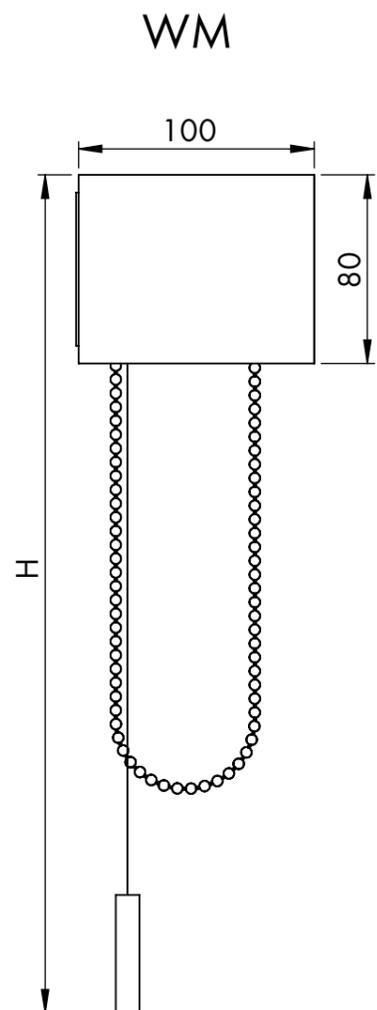

REN47


ACCU MOTOR SOMFY RTS

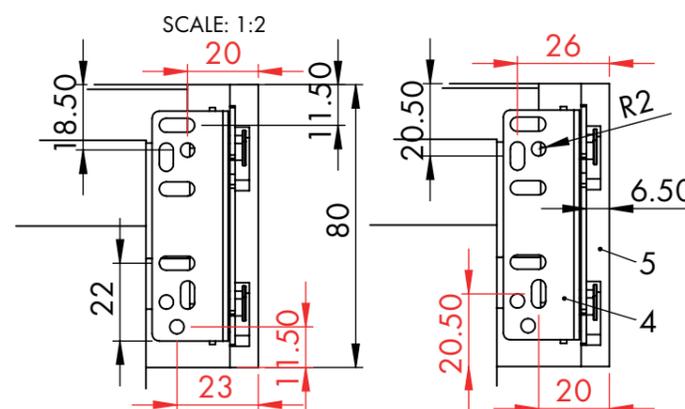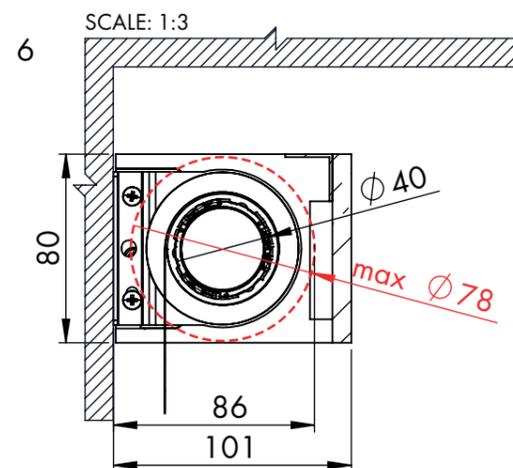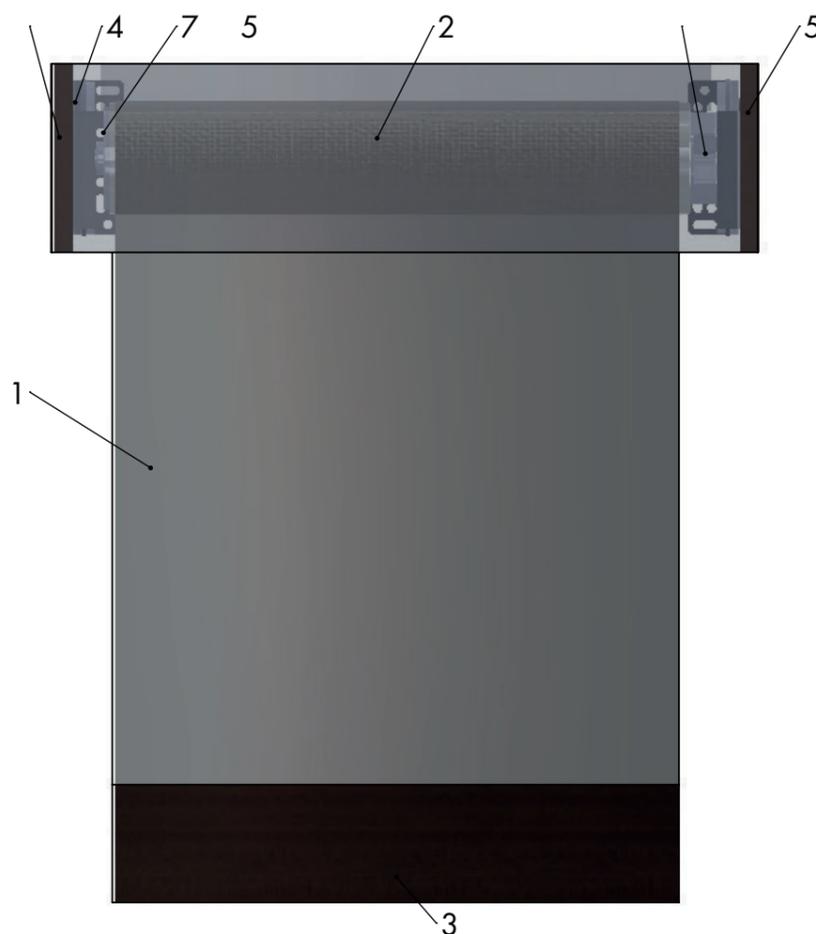

PARAMETERS




Width	W max 3400 mm
Height	H (in mm)
Fabric	F..
Unwinding	A or B (contra)
Mounting	WM (wall)
Control Side	L (left) or R (right)
Bottom bar	FIN..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX32	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup







FINW50

SCALE: 1:4

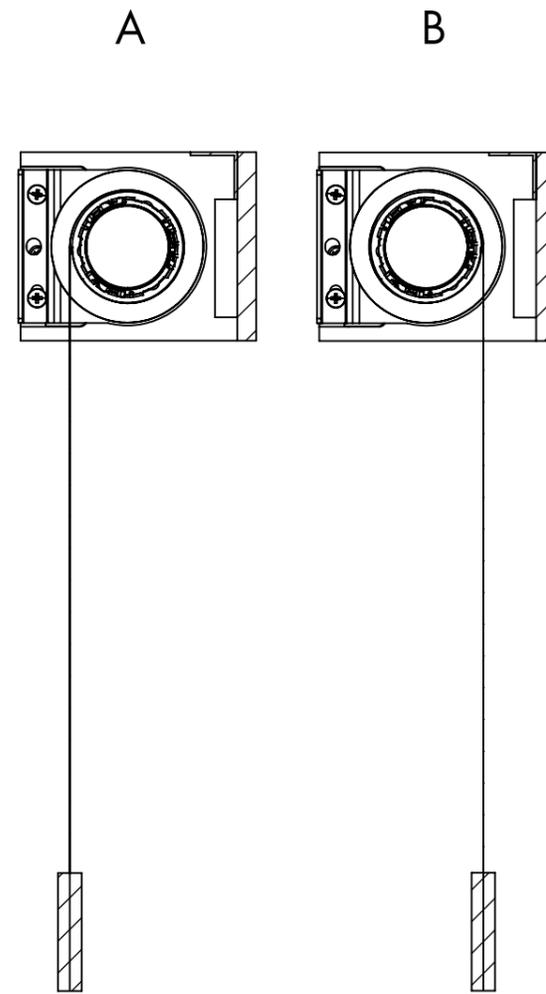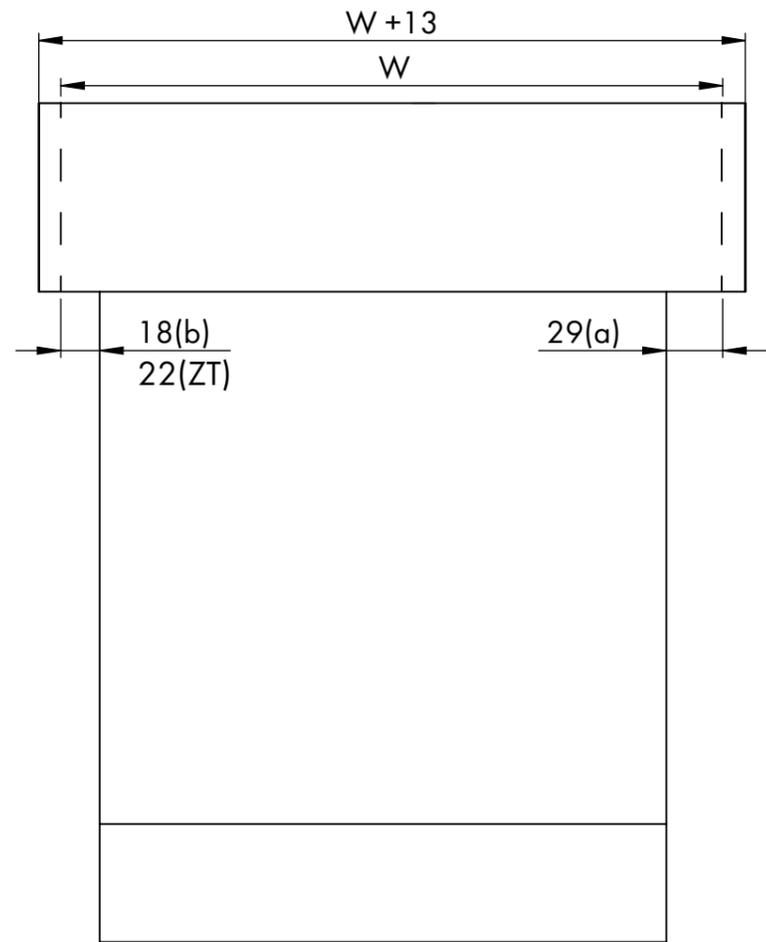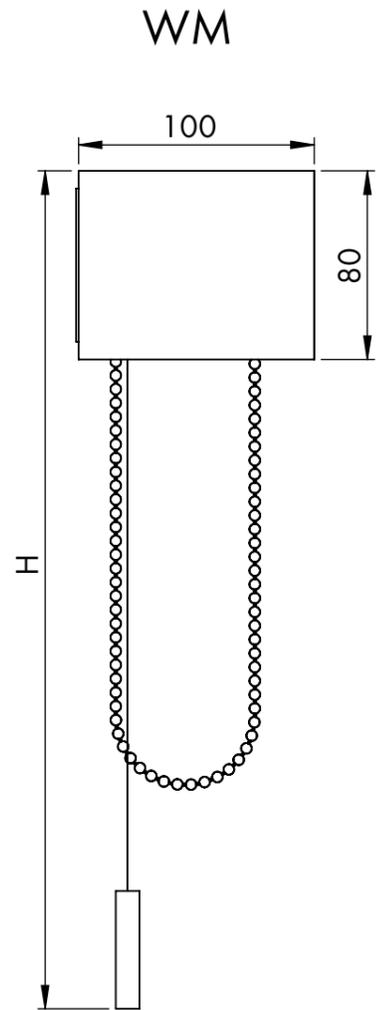

REN47

230V MOTOR SOMFY

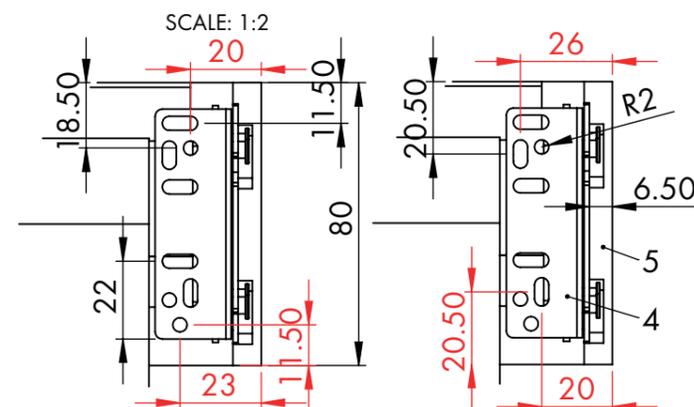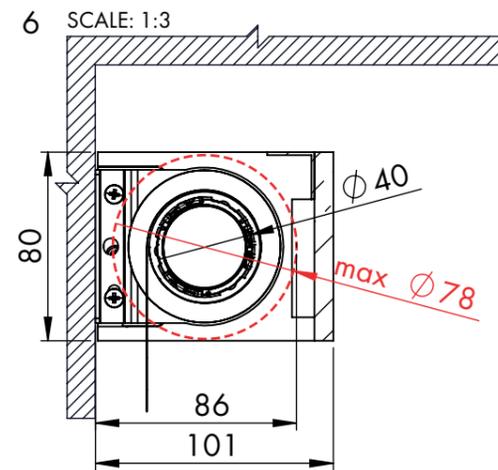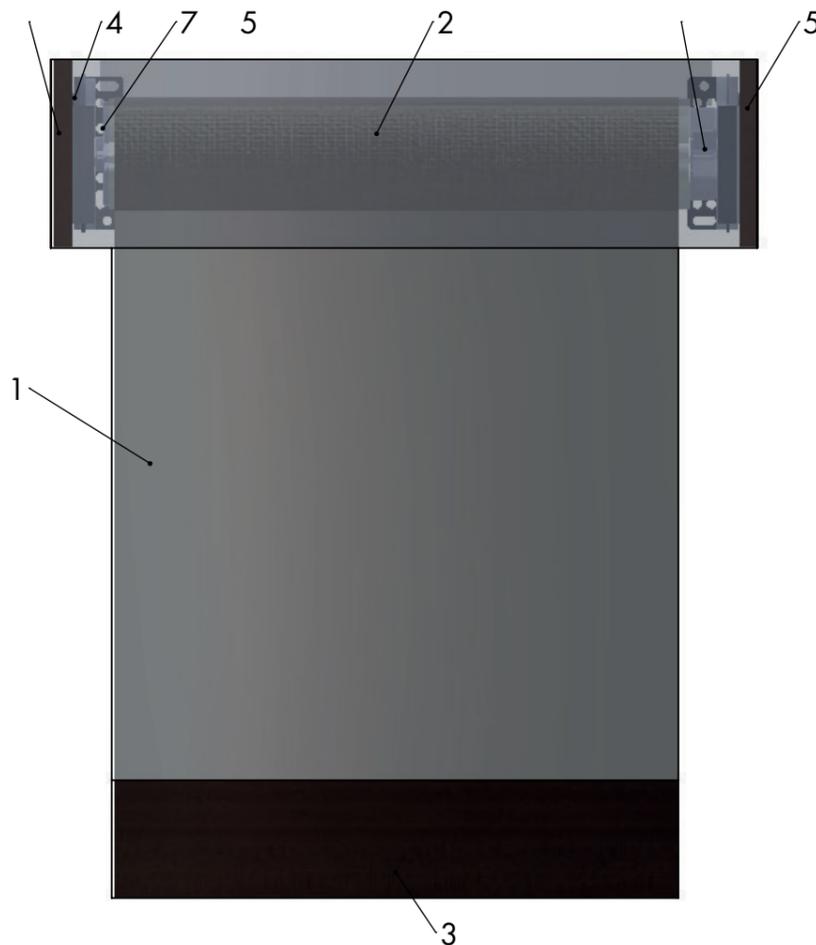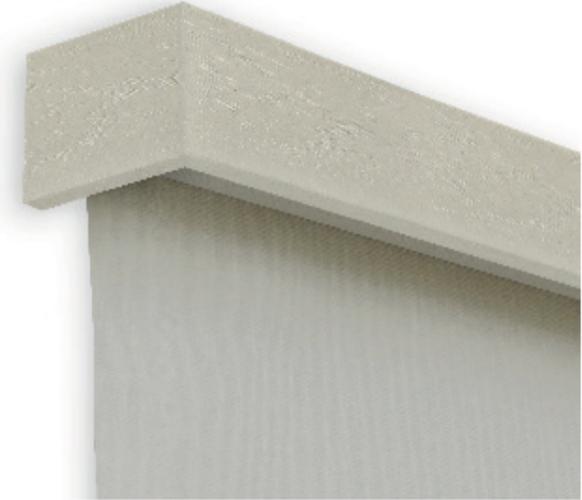

PARAMETERS



Width	W_{max} 3400 mm
Height	H (in mm)
Fabric	F..
Unwinding	A or B (contra)
Mounting	WM (wall)
Control Side	L (left) or R (right)
Bottom bar	FIN..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX32	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup




FINW50




CM / WM

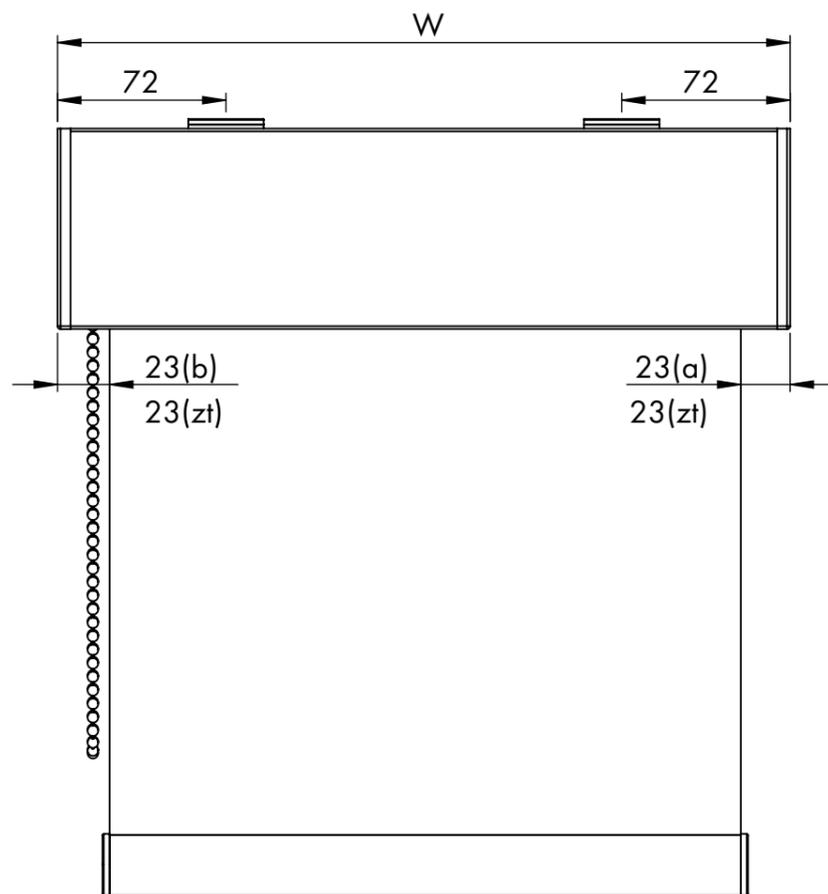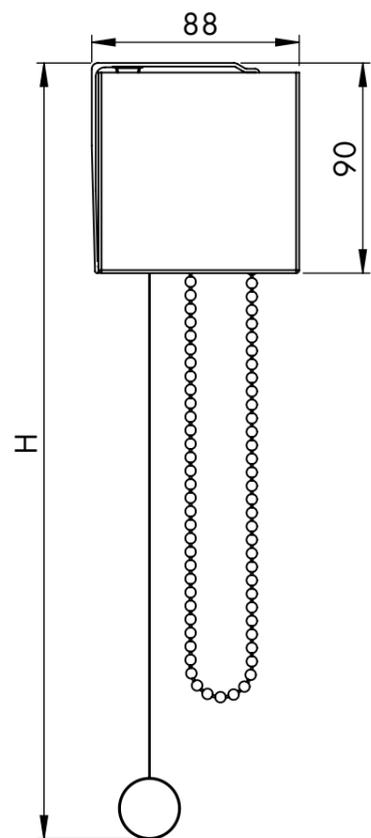


A

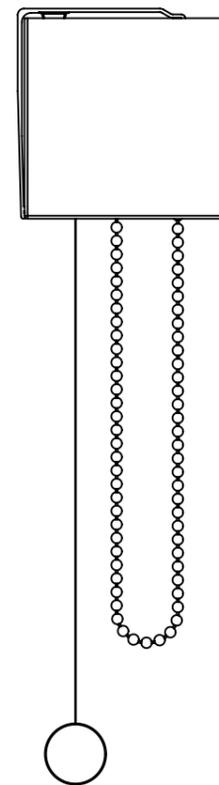


REN47
CHAIN

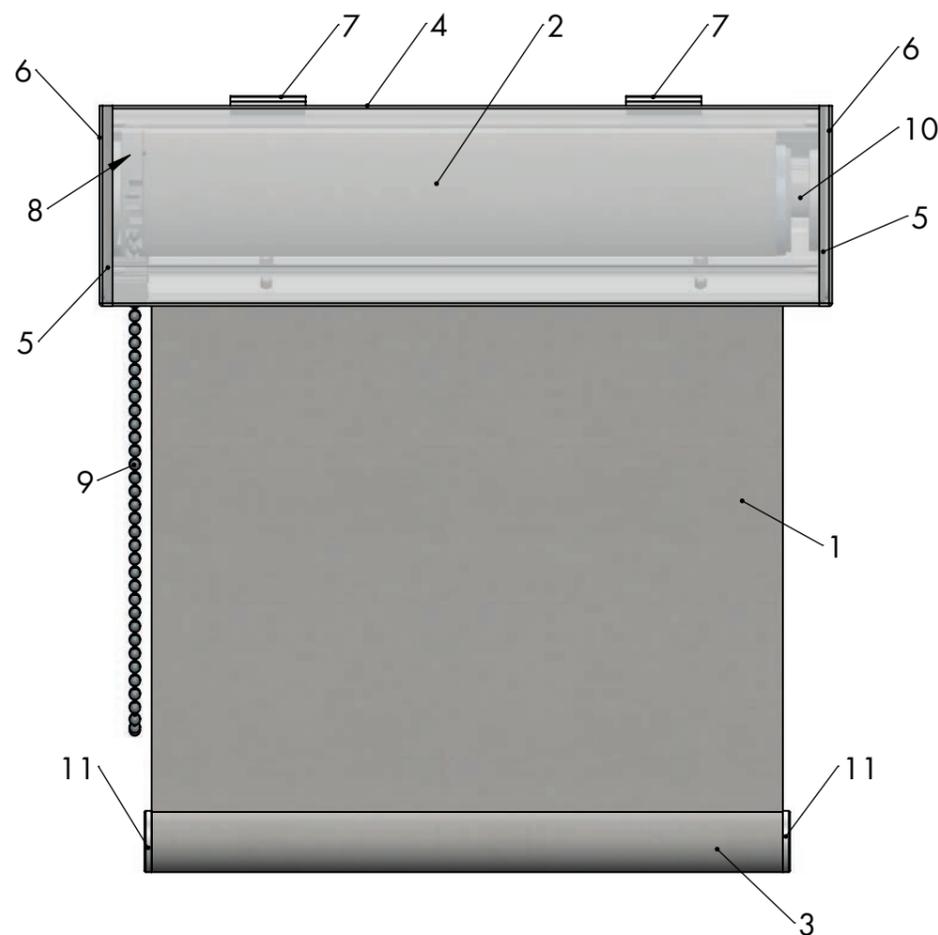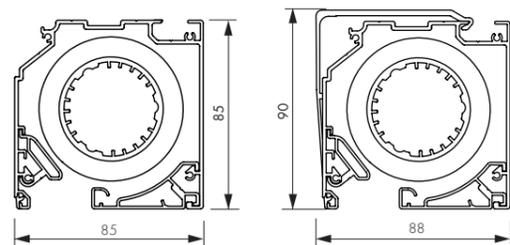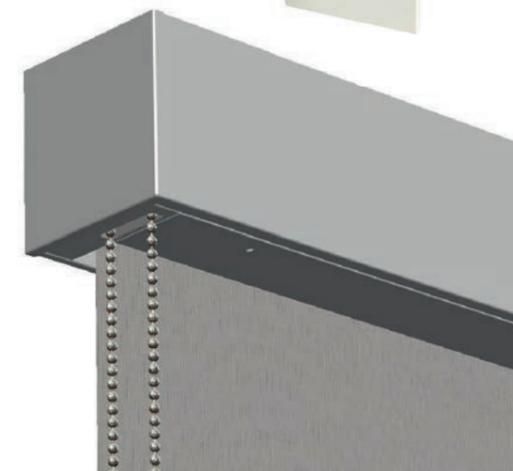

SCALE: 1:3

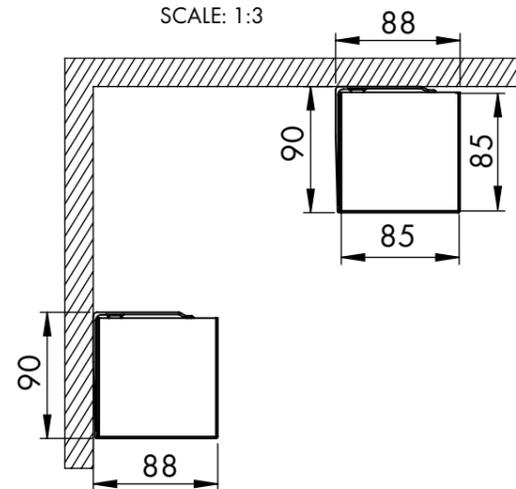

SCALE: 1:3

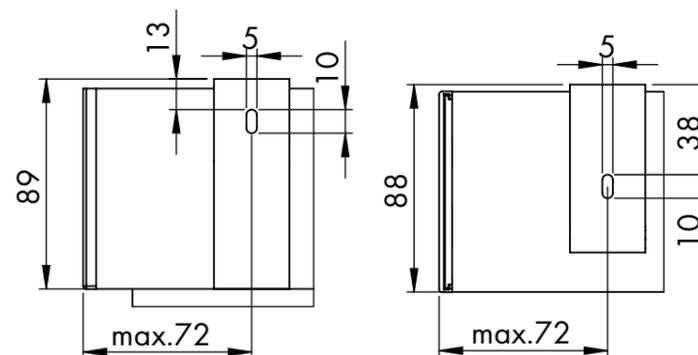

PARAMETERS



- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding only A
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..
- Chain CH..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FIN..	bottom bar
4	XX..	box profile
5	B..	bracket
6	BC..	bracket cover
7	XX..	mounting bracket
8	CHM..	chain mechanism
9	CH..	chain
10	XX..	pin
11	EC..	end cup




FINO

CM / WM

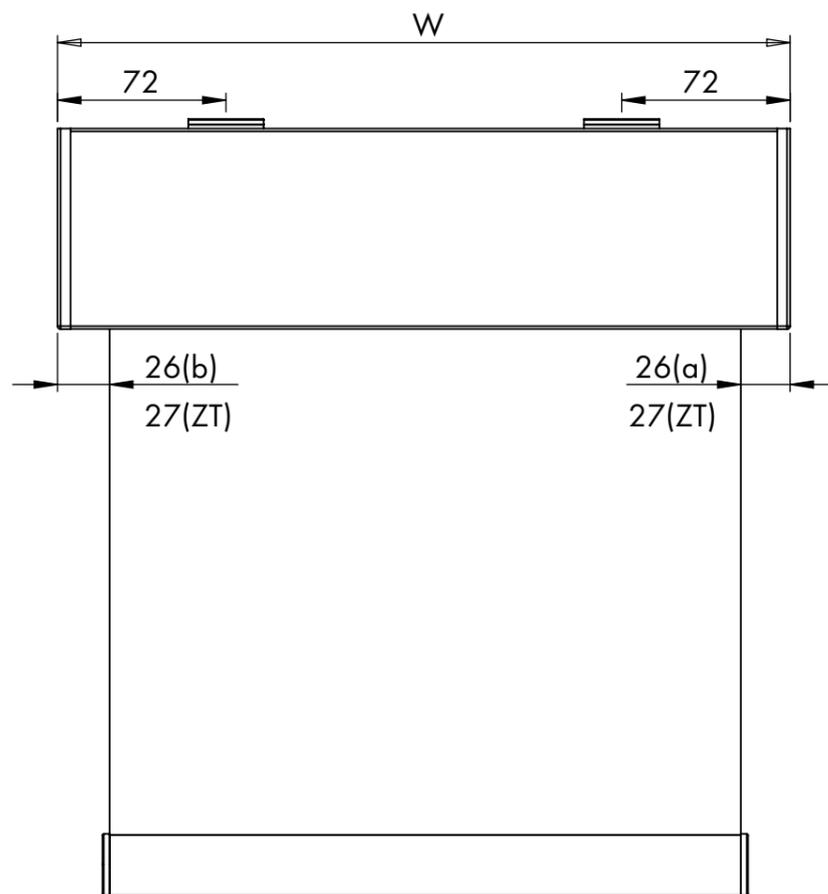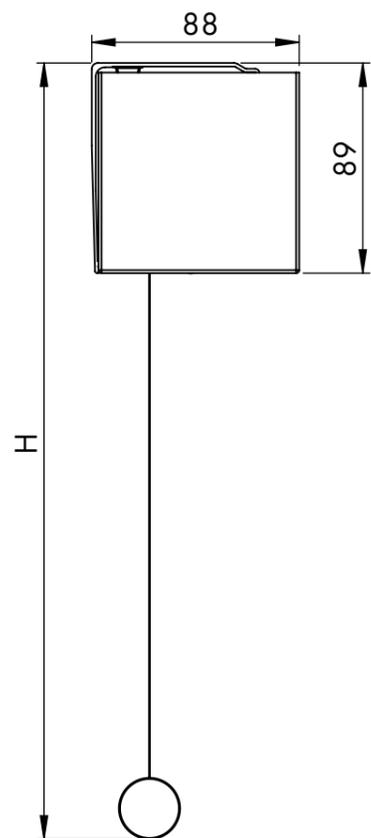

A

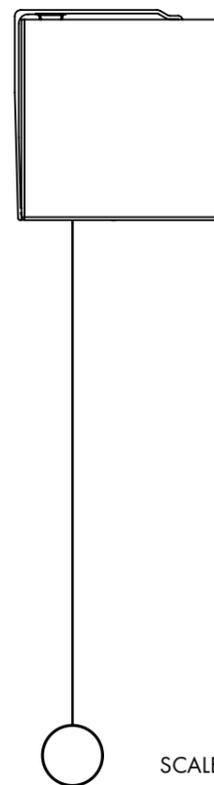


REN47




230V MOTOR SOMFY Y



SCALE: 1:3

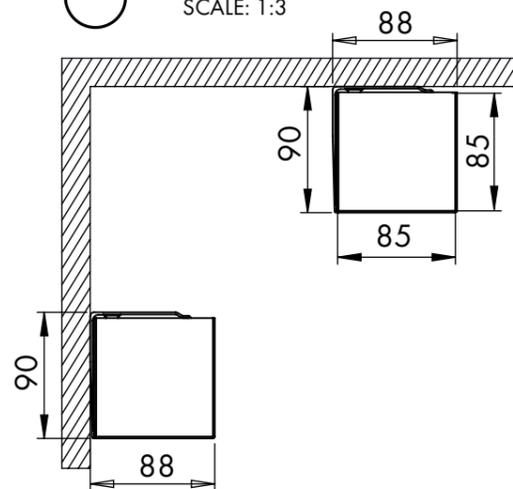

SCALE: 1:3

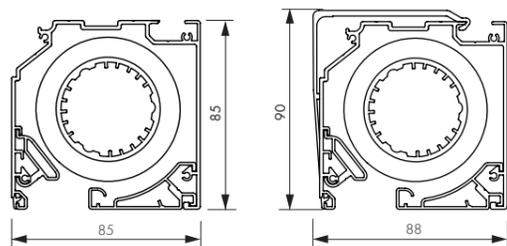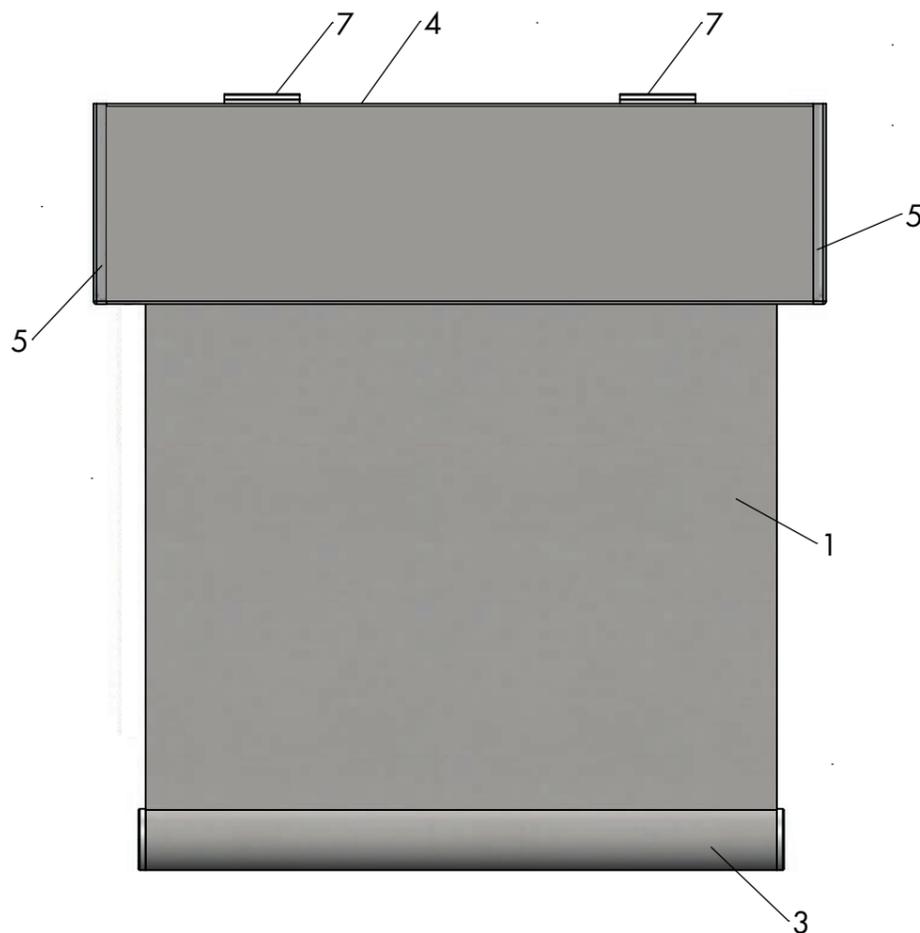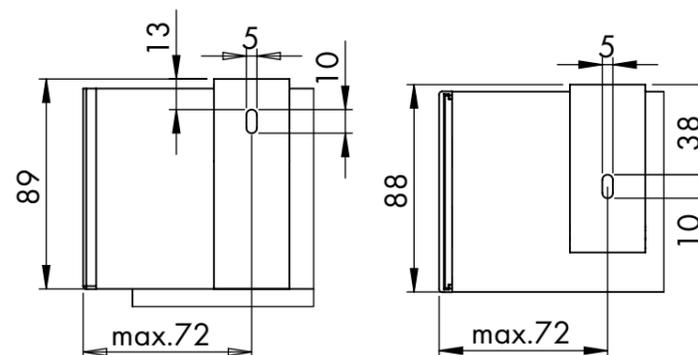

N	CODE	DESCRIPTION
1	F..	fabric
3	FIN..	bottom bar
4	XX..	box profile
5	B..	bracket
7	XX..	mounting bracket


PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding only A
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..
- Chain CH..





FINO

SCALE: 1:3

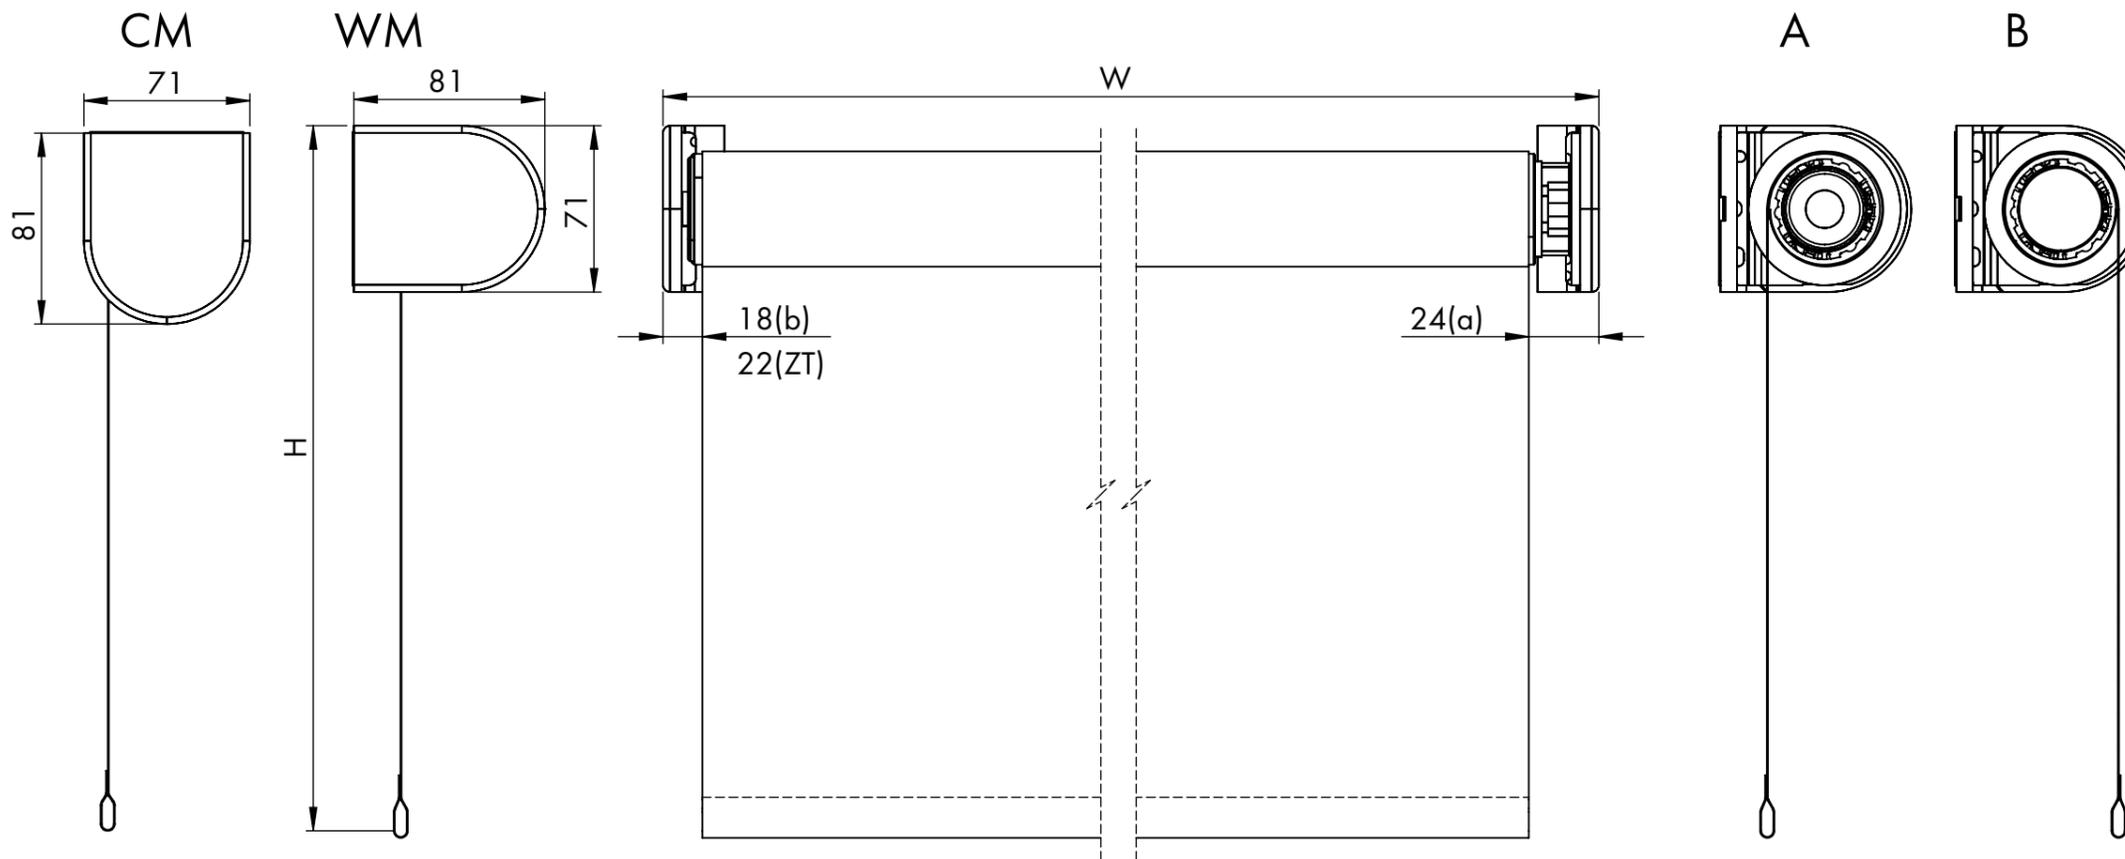

REN47

ACCU MOTOR SOMFY RTS

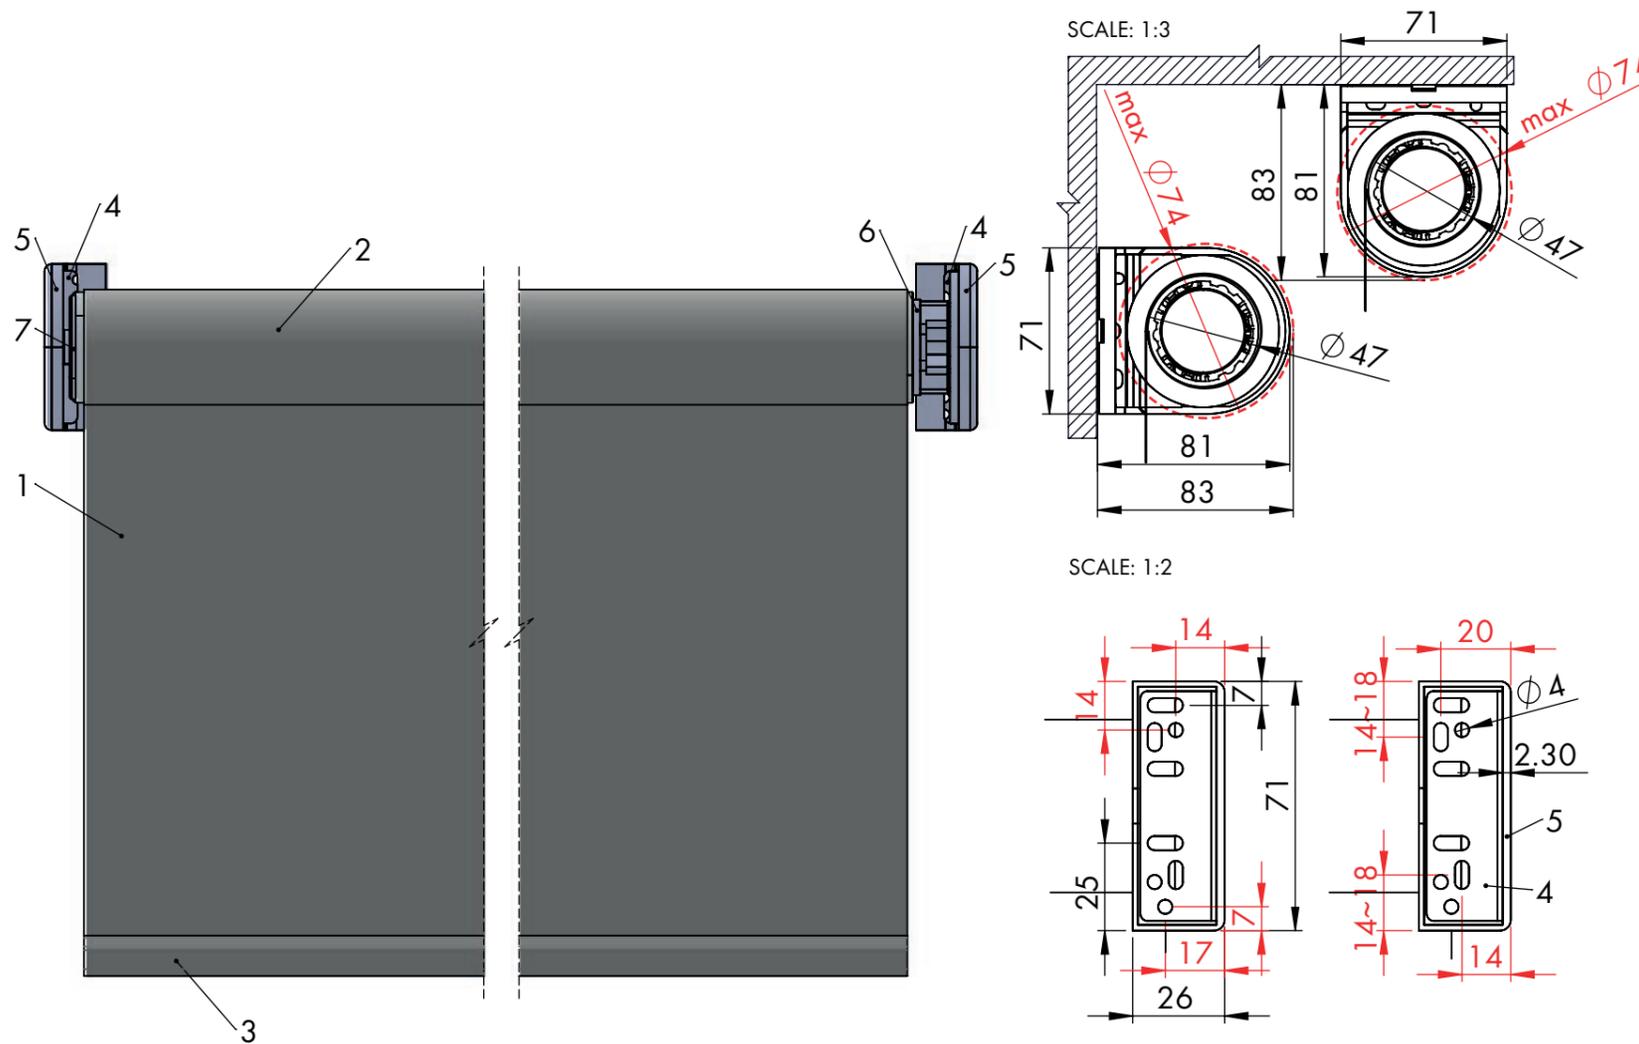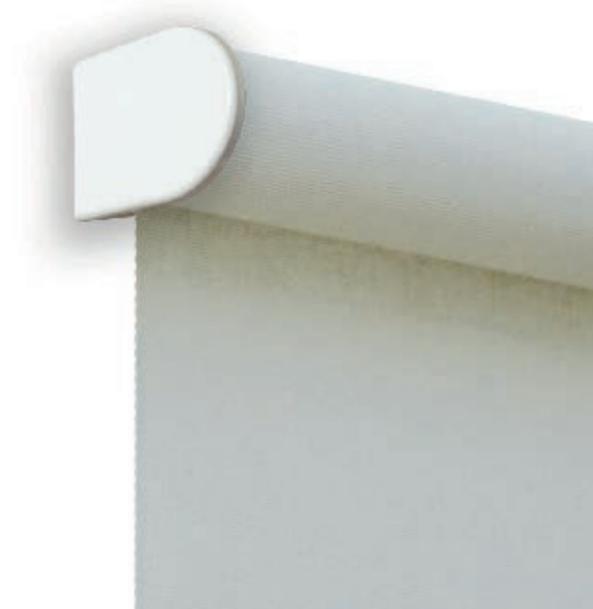



N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup

PARAMETERS

Width	W (in mm)
Height	H (in mm)
Fabric	F..
Unwinding	A or B (contra)
Mounting	WM (wall) or CM (ceiling)
Control Side	L (left) or R (right)
Bottom bar	FIN..




FINB

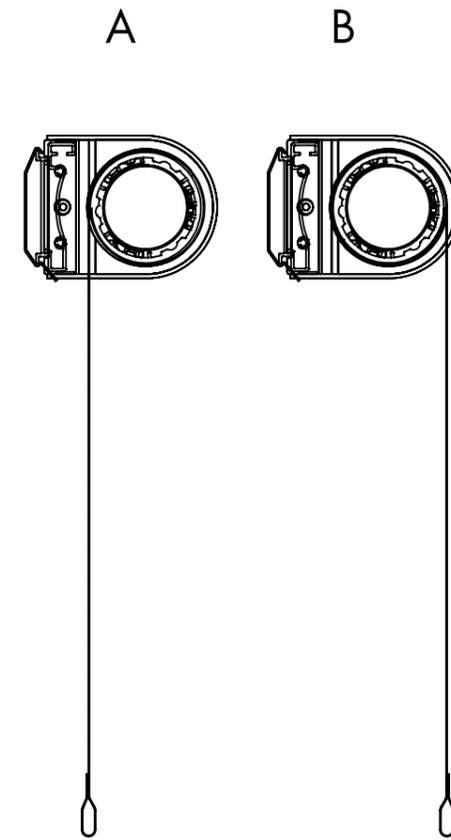
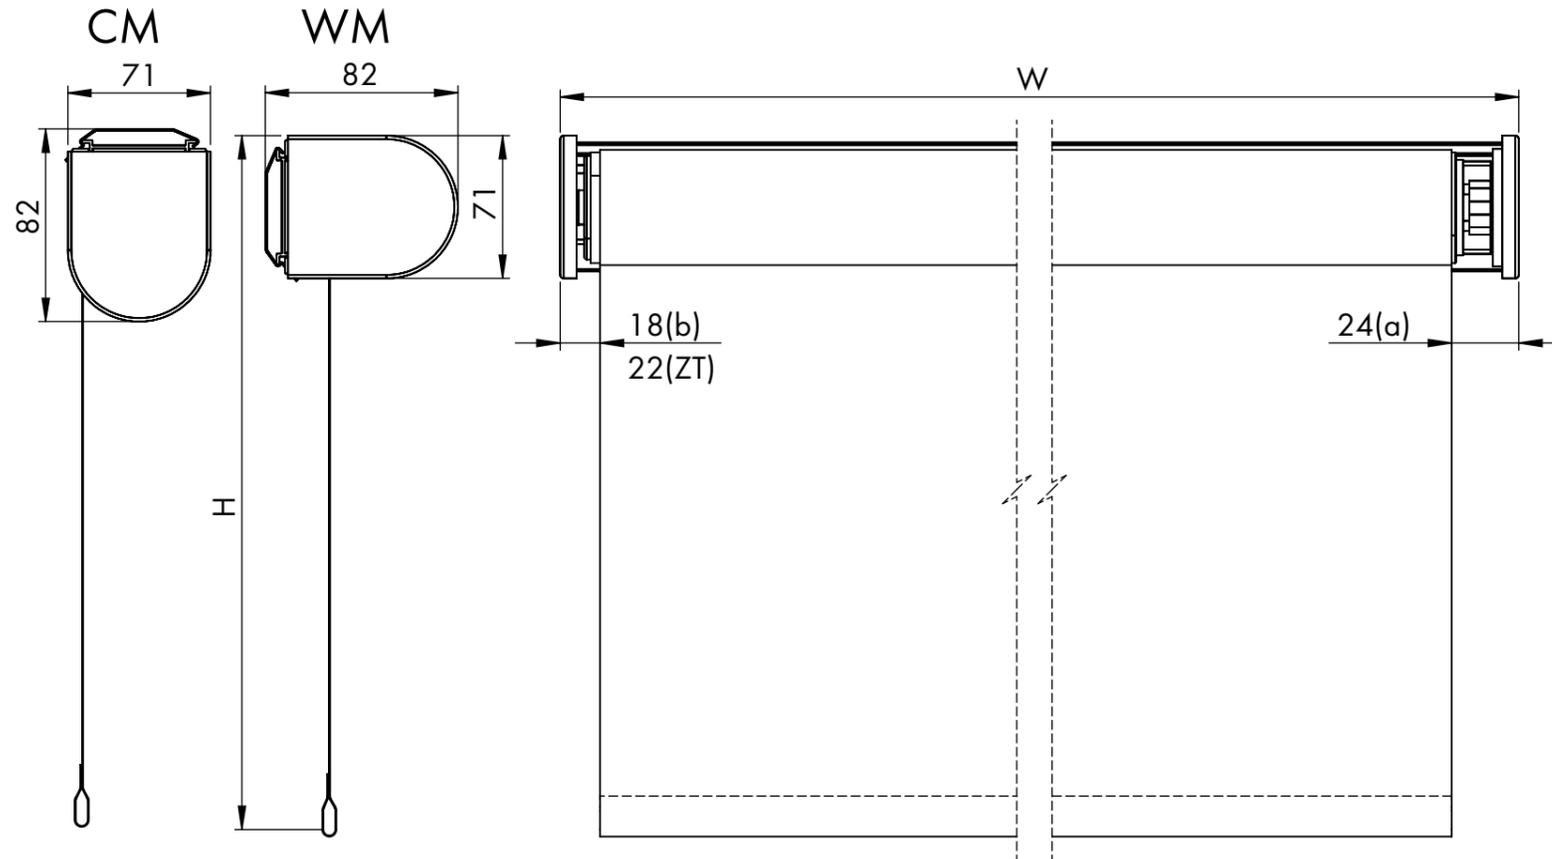


REN47

ACCU MOTOR SOMFY RTS

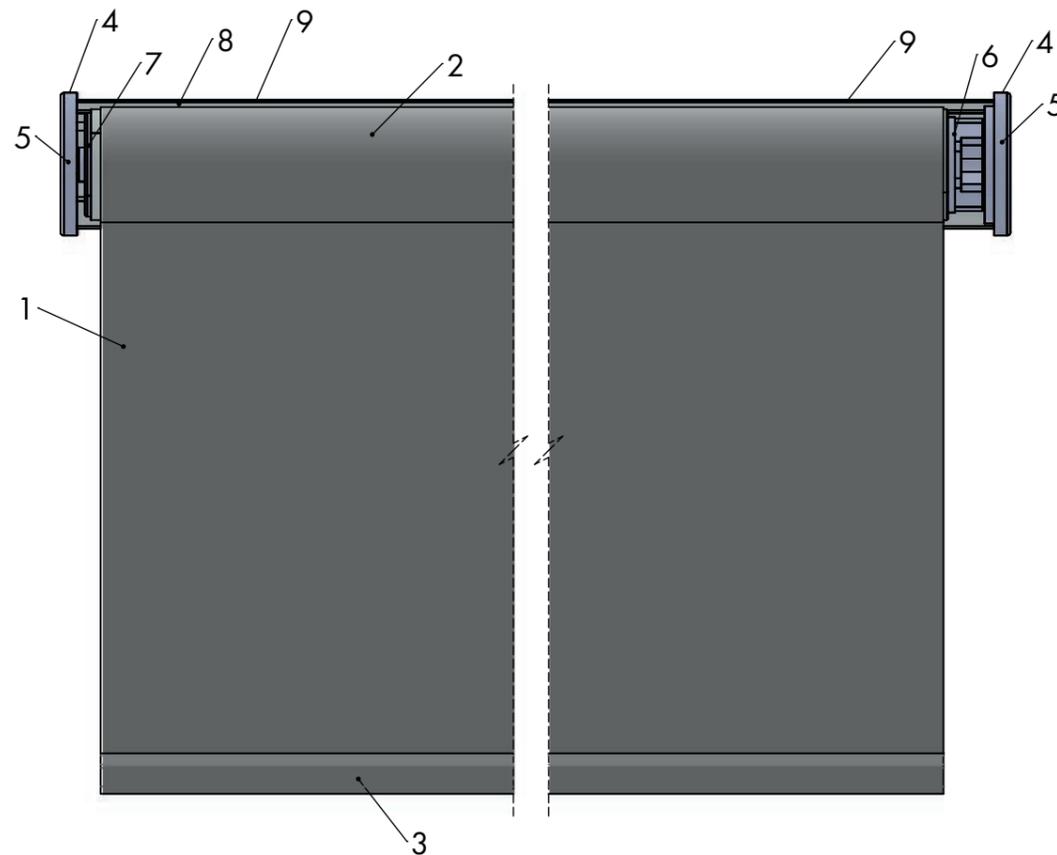

N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MP..	mounting profile
9	MC..	mounting clip

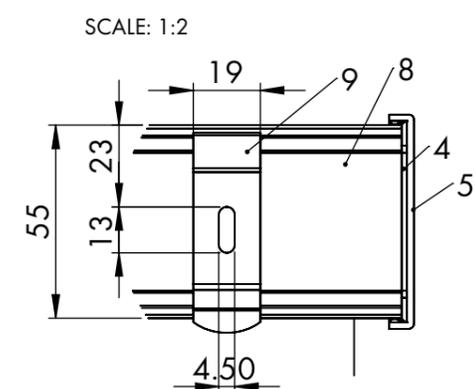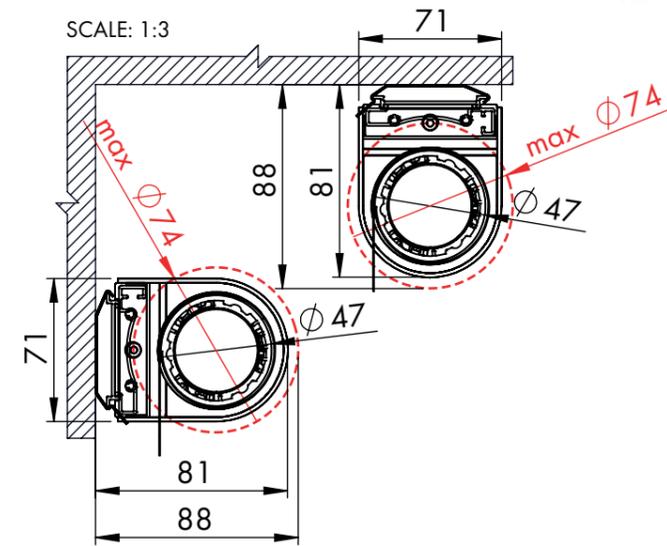


PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..






FINB

SCALE: 1:3

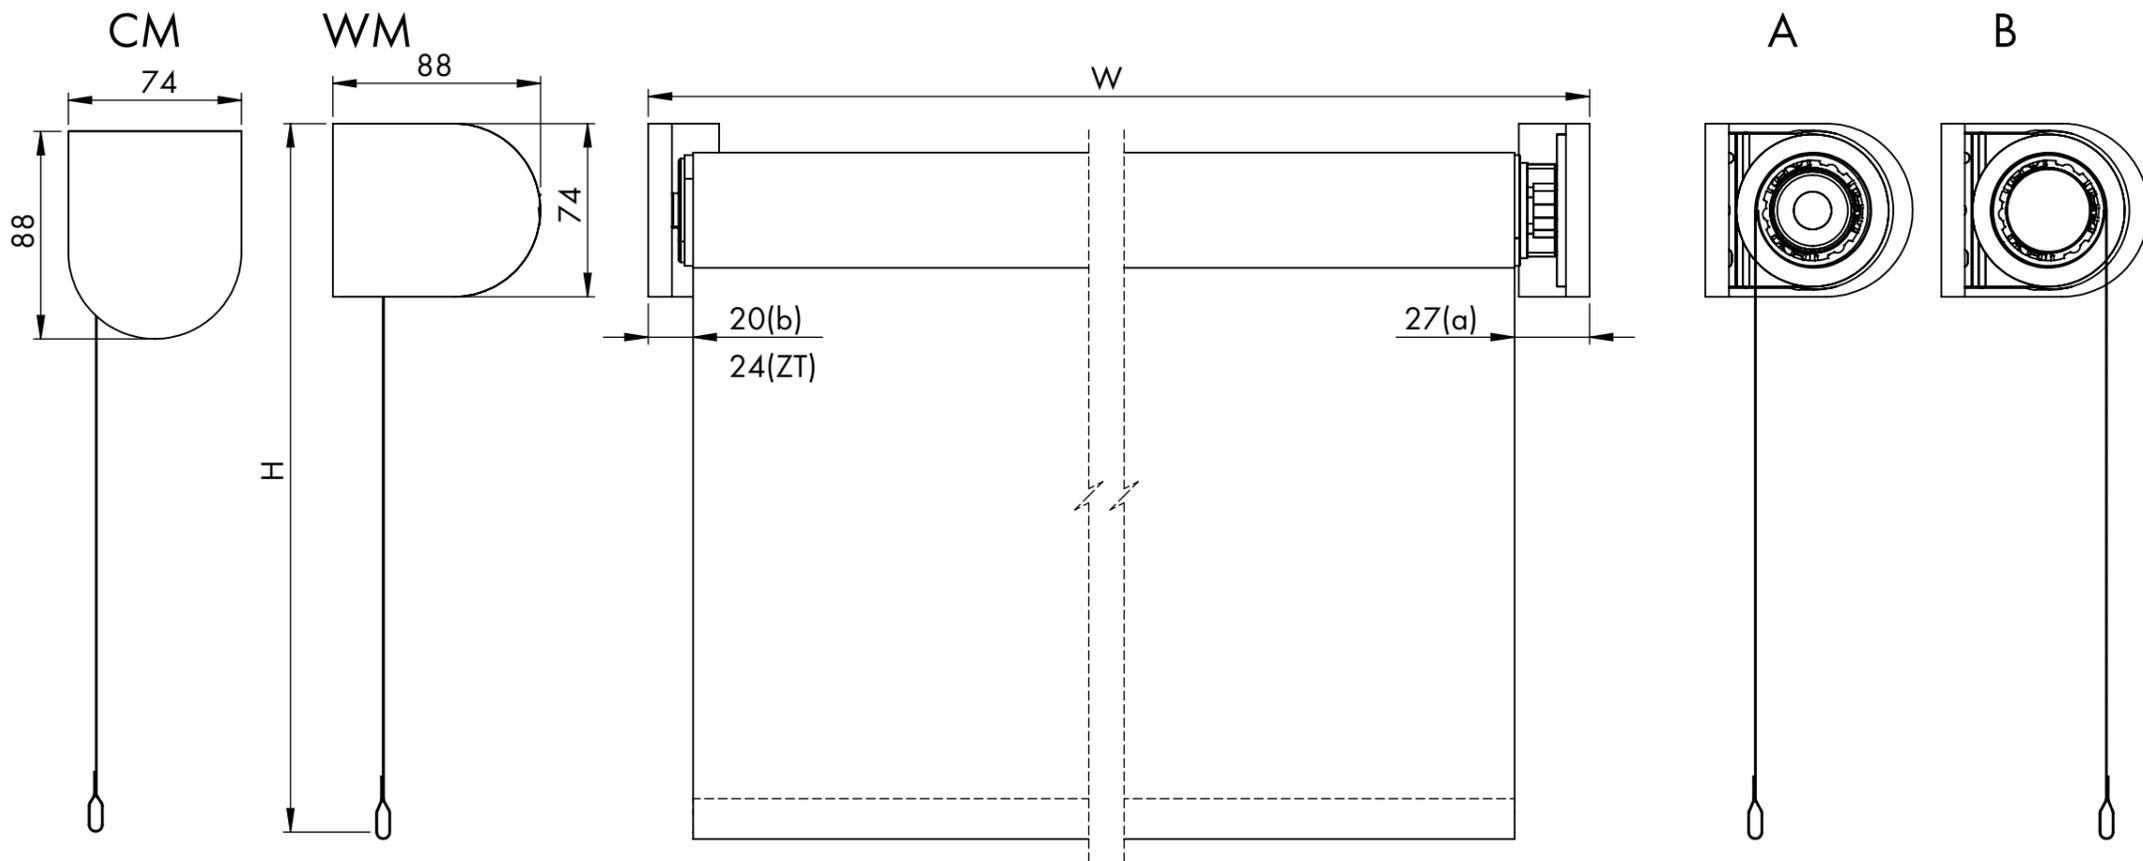

REN47

ACCU MOTOR SOMFY RTS

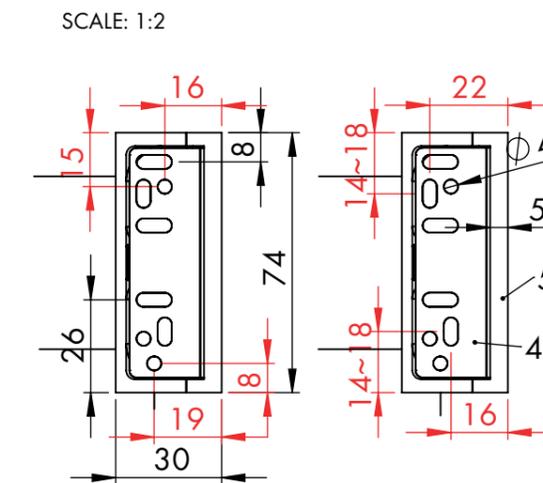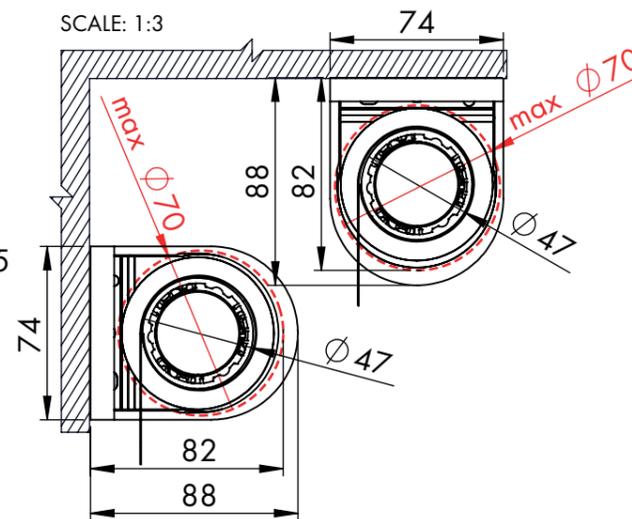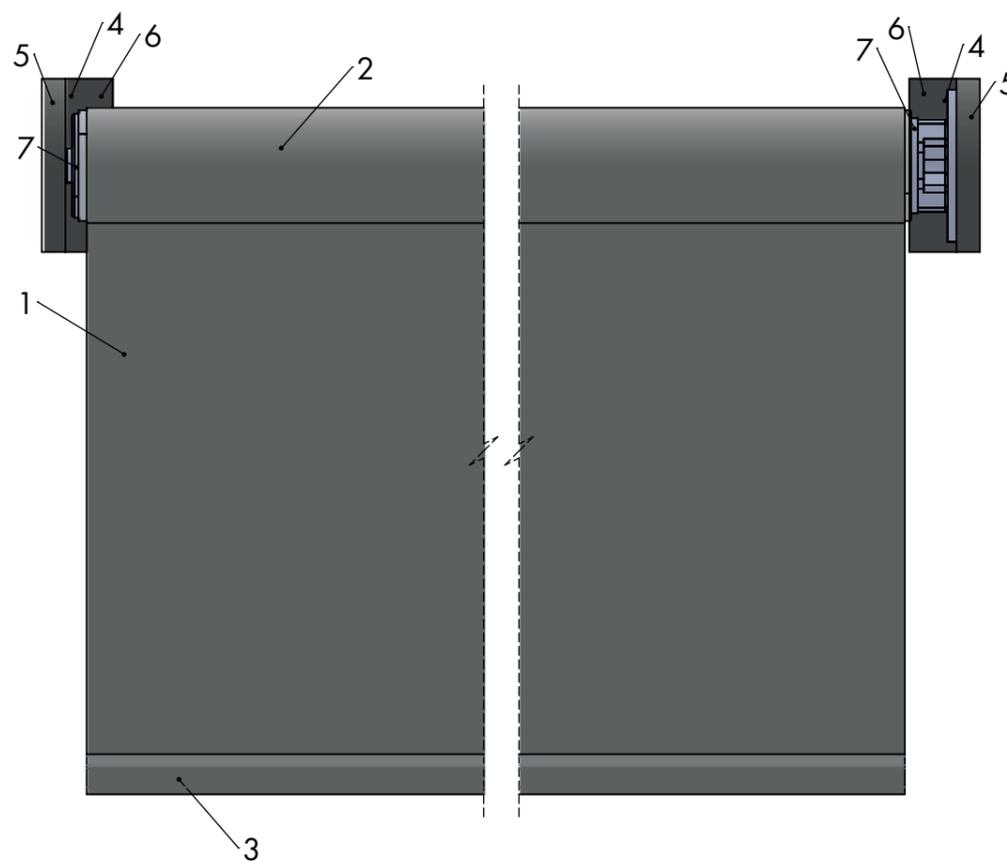



PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	SC..	screw cover
7	MOT..	motor + adapter
8	EC..	end cup




FINB

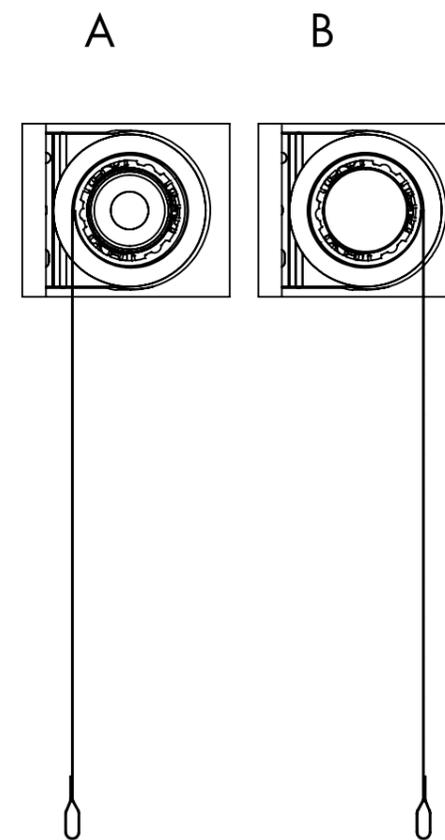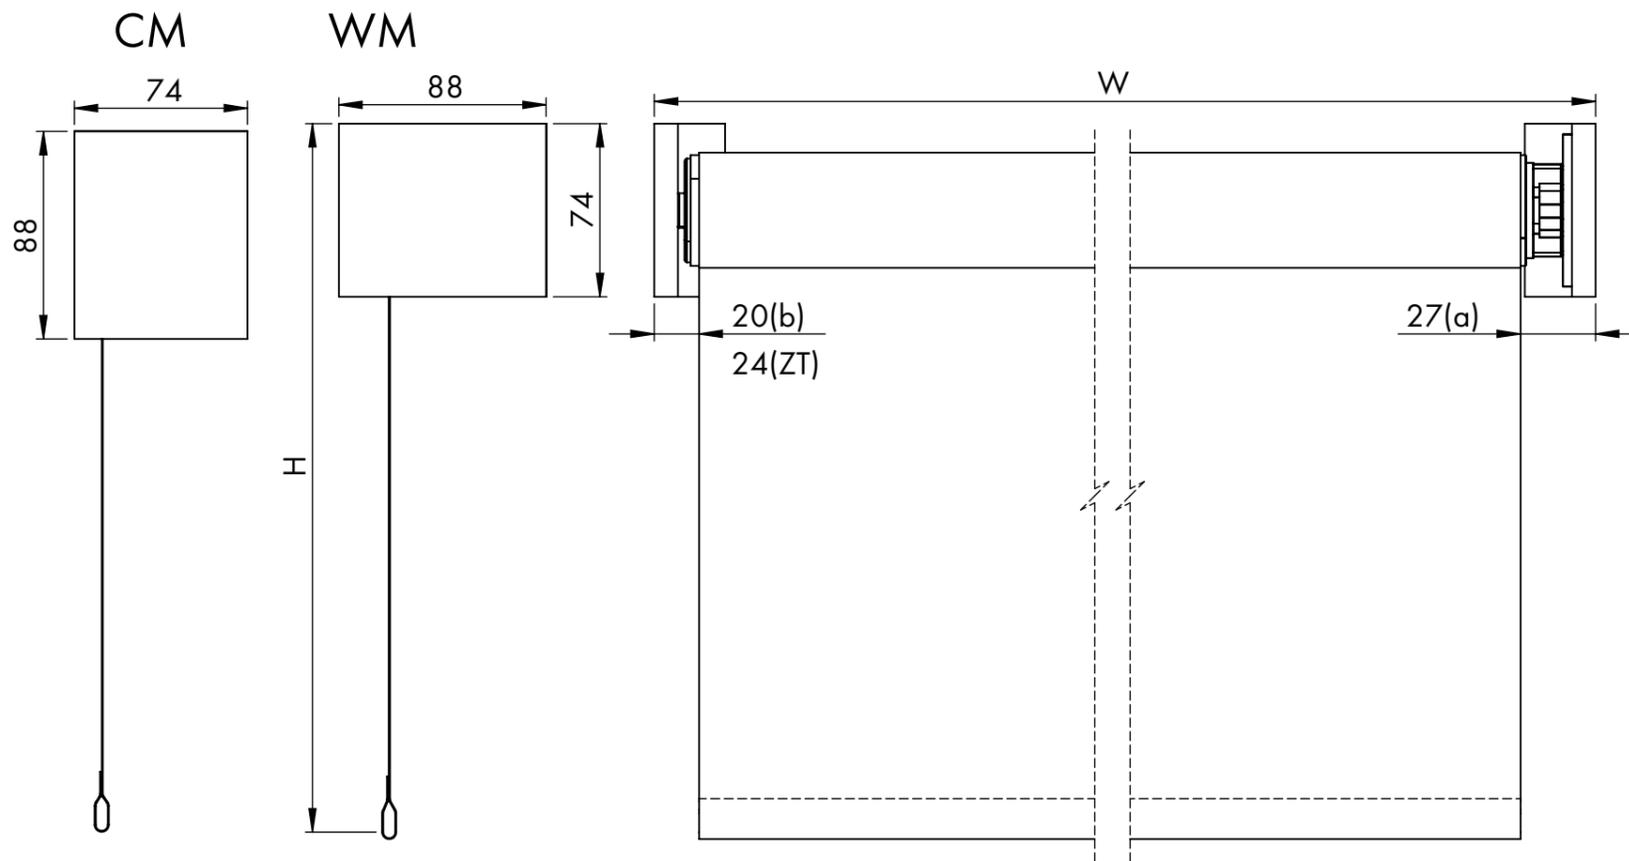

REN47

ACCU MOTOR SOMFY RTS

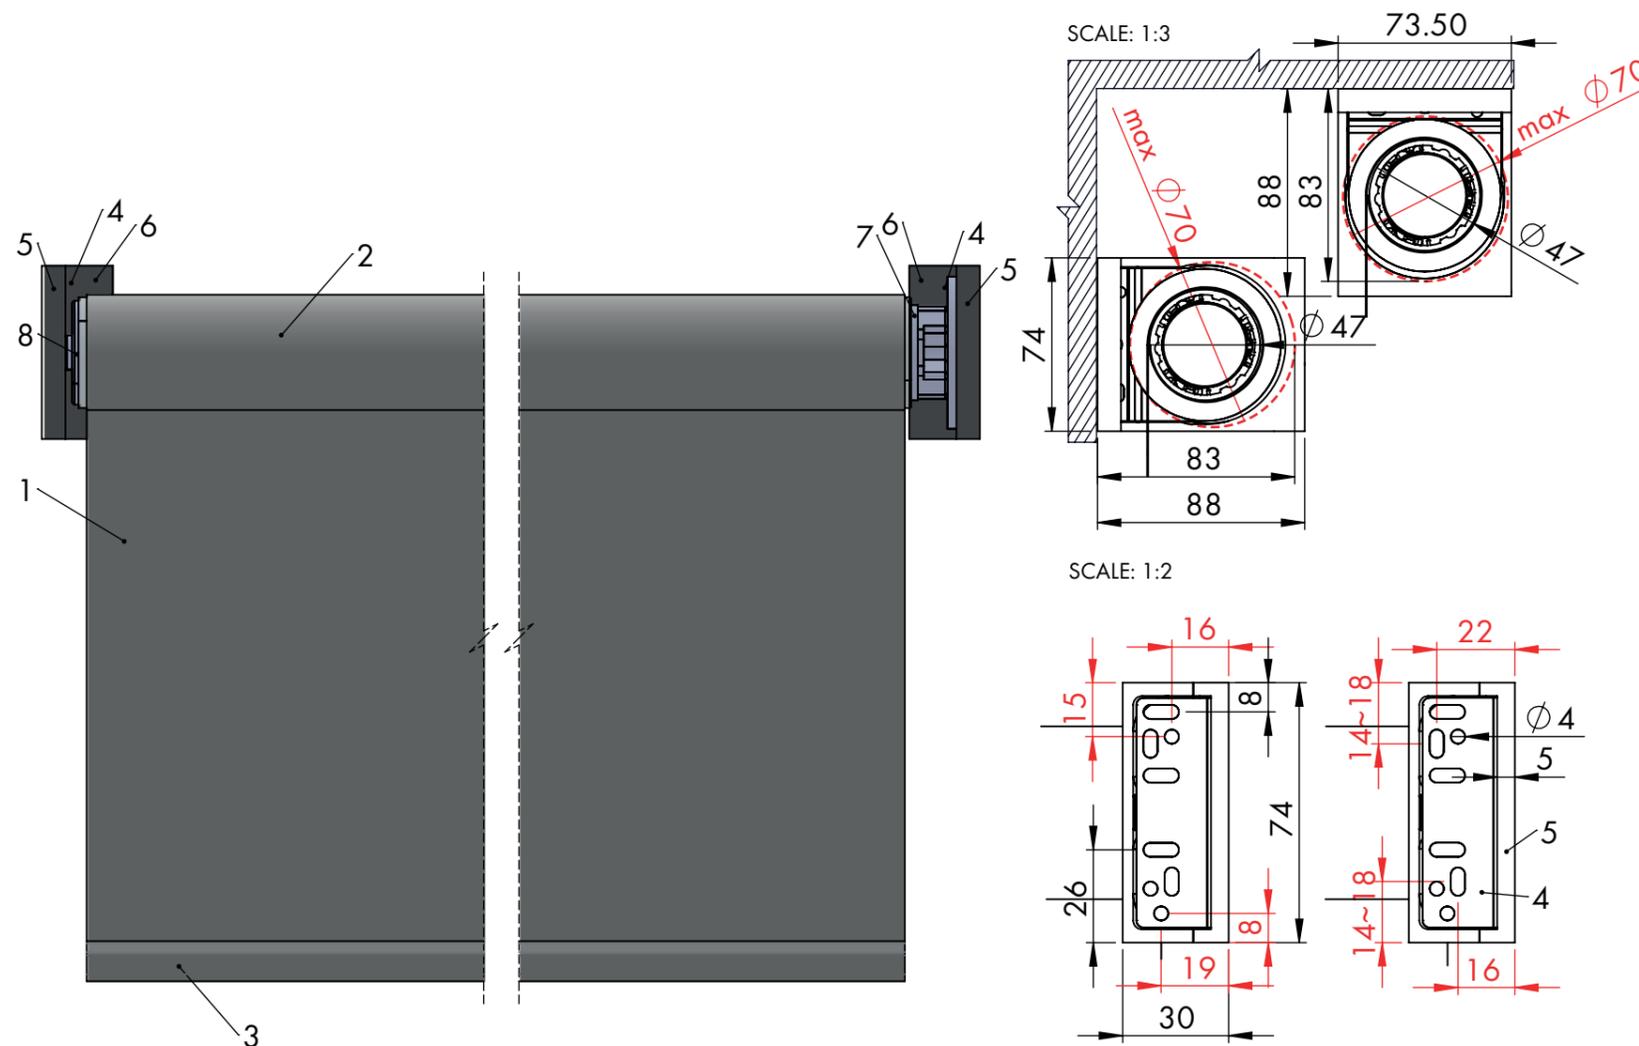



N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	SC..	screw cover
7	MOT..	motor + adapter
8	EC..	end cup

PARAMETERS

- Width: W (in mm)
- Height: H (in mm)
- Fabric: F..
- Unwinding: A or B (contra)
- Mounting: WM (wall) or CM (ceiling)
- Control Side: L (left) or R (right)
- Bottom bar: FIN..






FINB

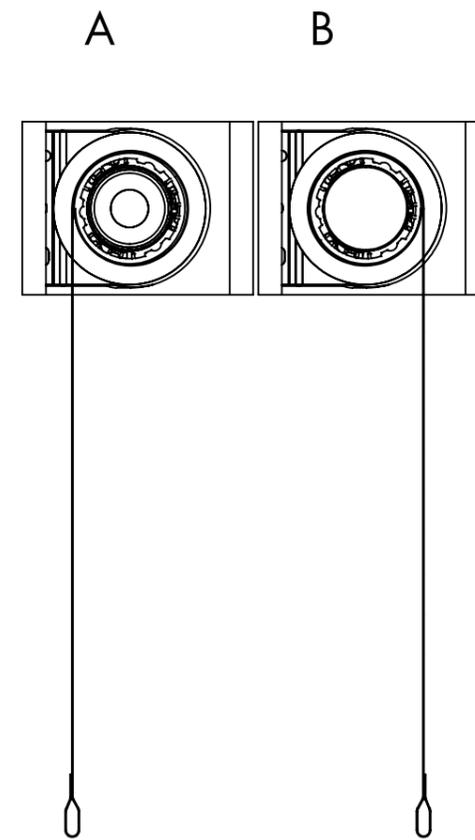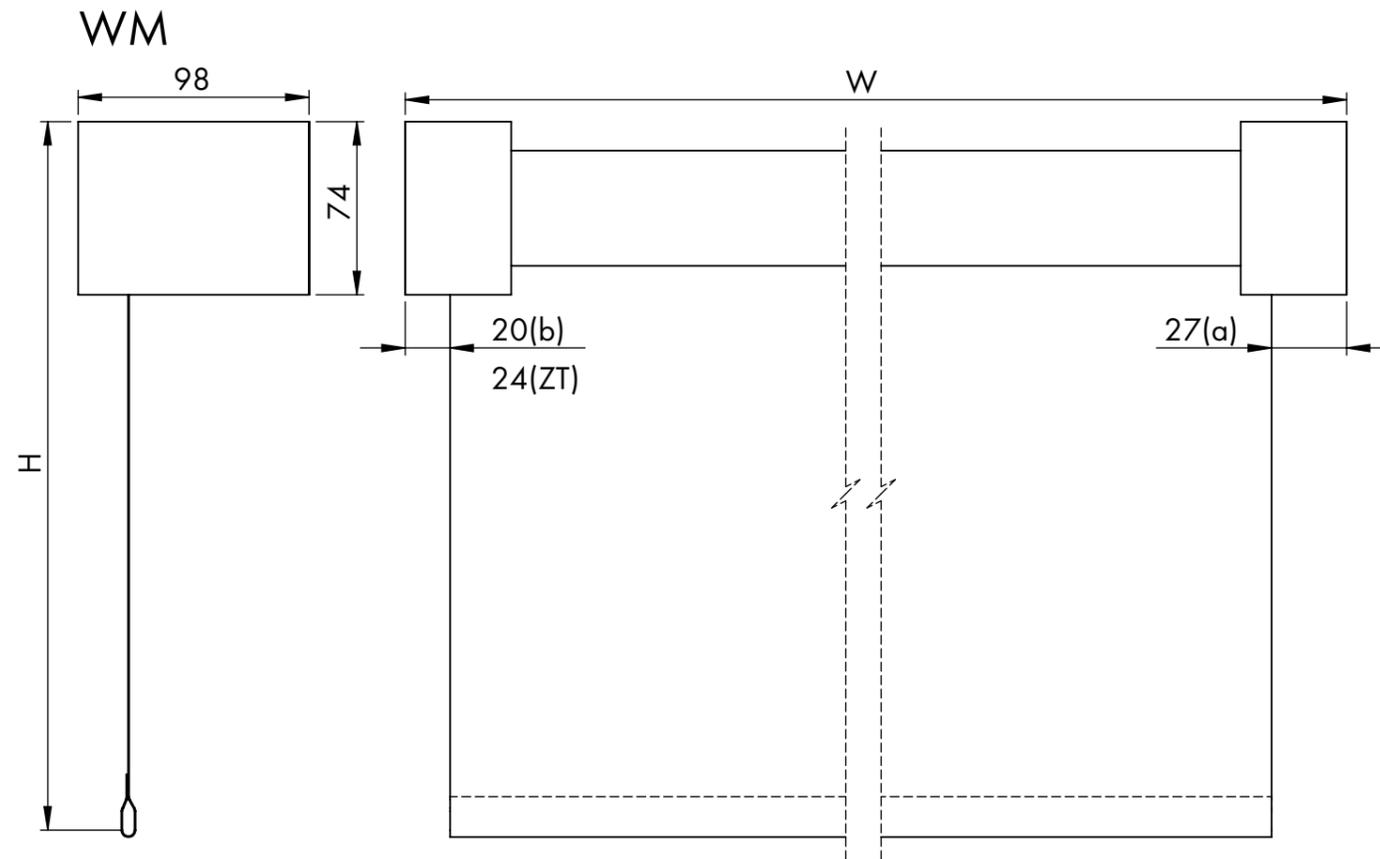

REN47

ACCU MOTOR SOMFY RTS

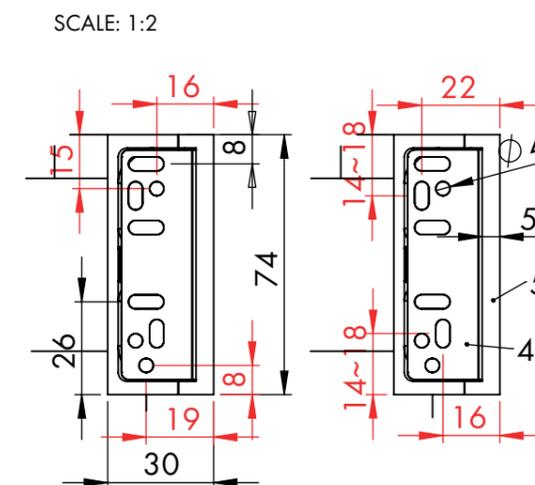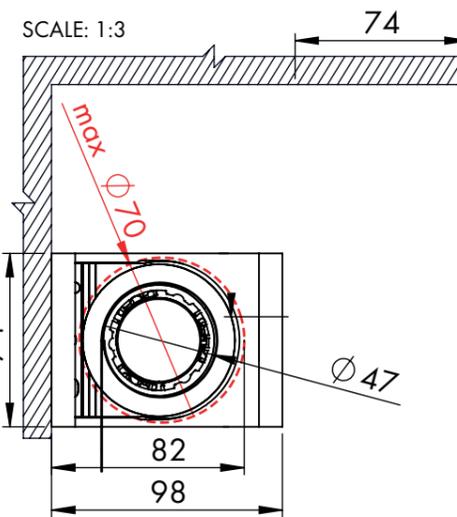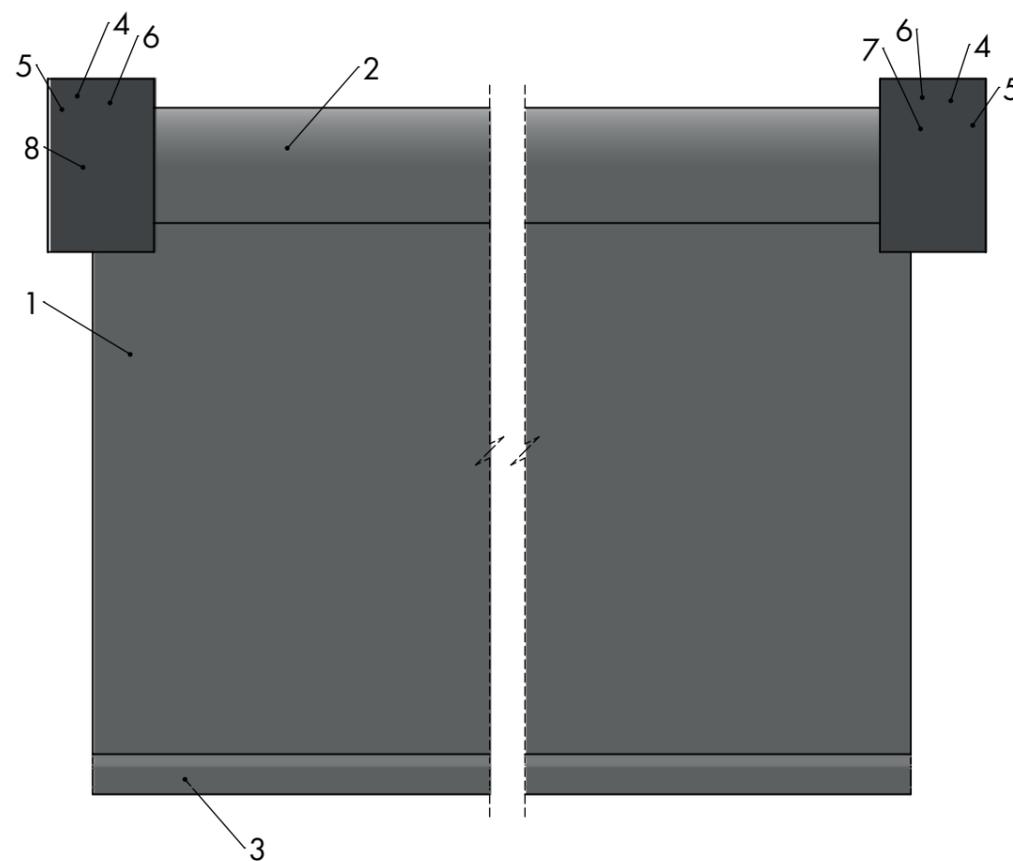



N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	SC..	screw cover
7	MOT..	motor + adapter
8	EC..	end cup

PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall)
- Control Side L (left) or R (right)
- Bottom bar FIN..






FINB

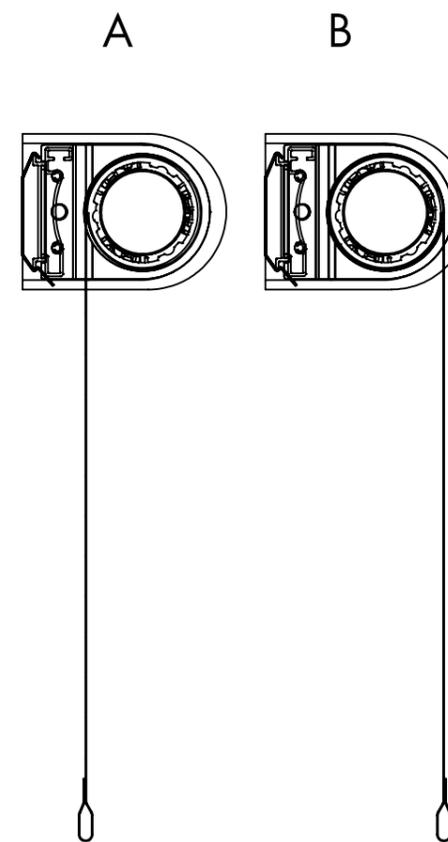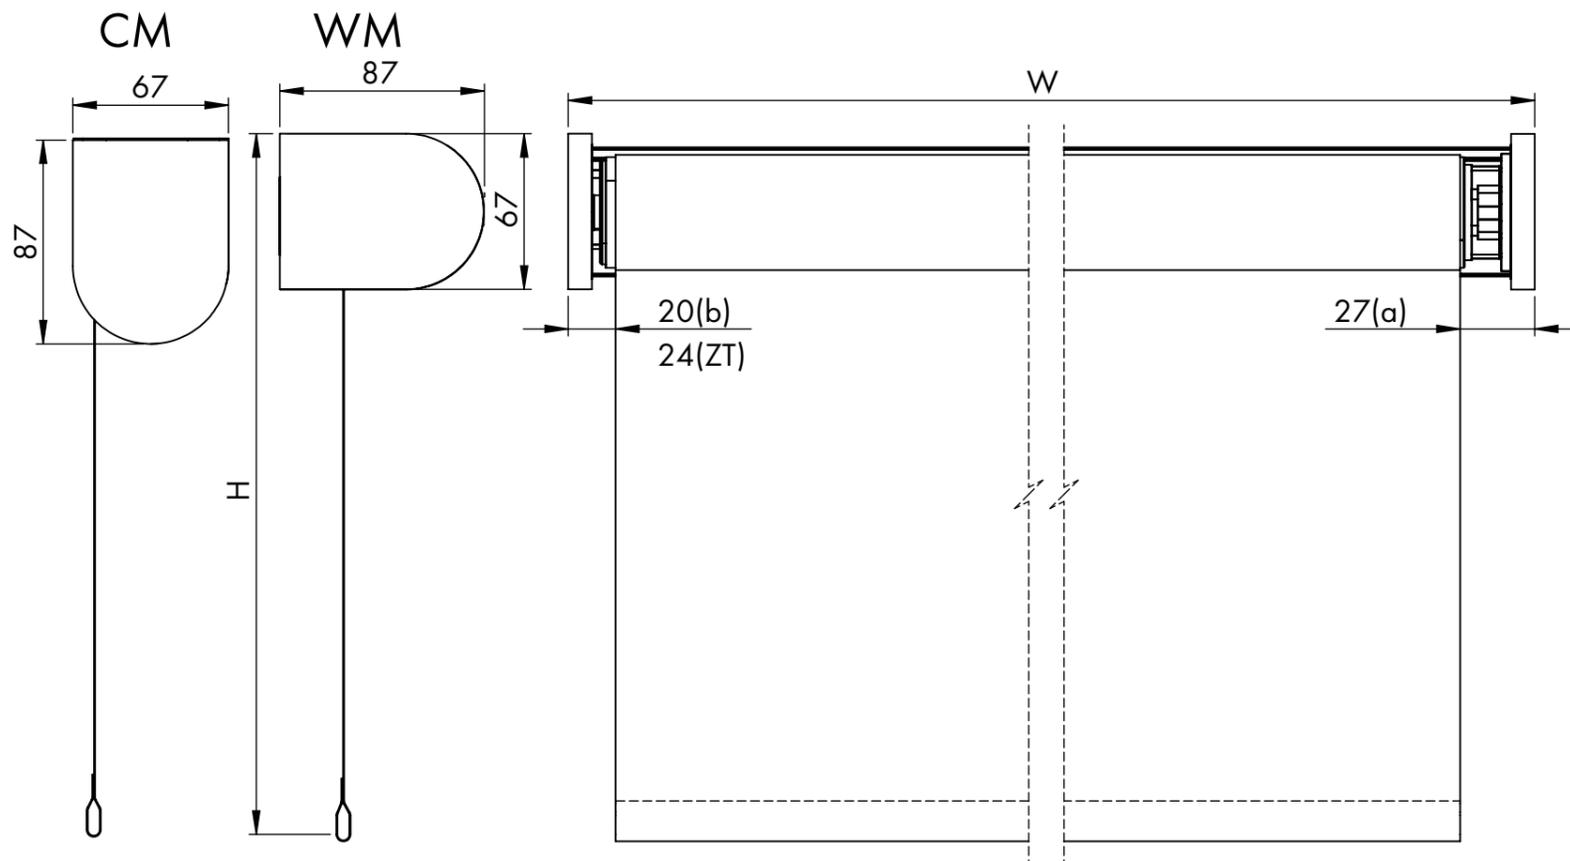

REN47

ACCU MOTOR SOMFY RTS

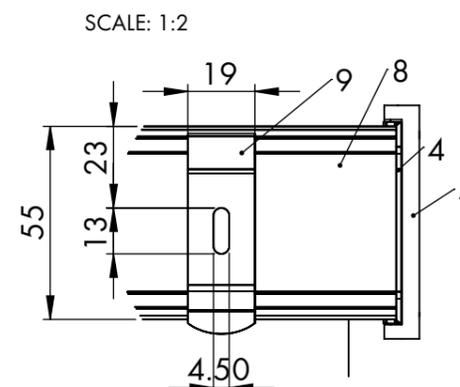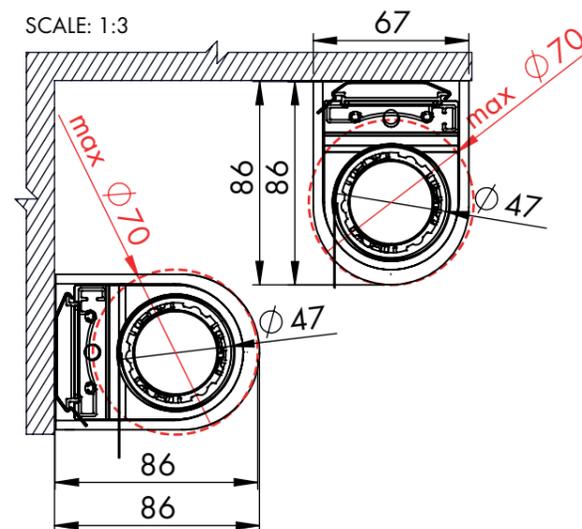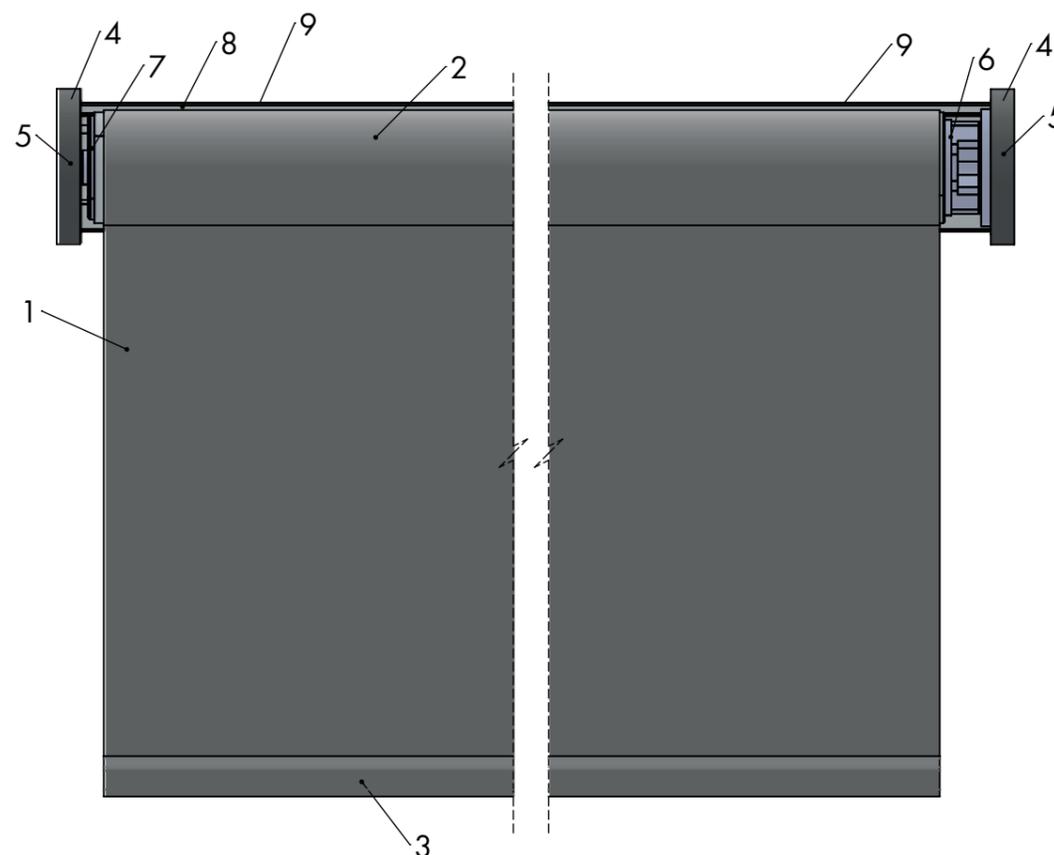



N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MP..	mounting profile
9	MC..	mounting clip

PARAMETERS

Width	W (in mm)
Height	H (in mm)
Fabric	F..
Unwinding	A or B (contra)
Mounting	WM (wall) or CM (ceiling)
Control Side	L (left) or R (right)
Bottom bar	FIN..




FINB

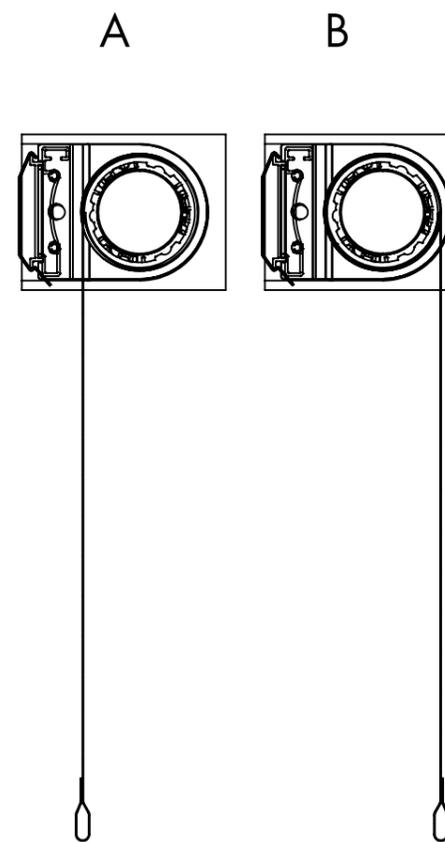
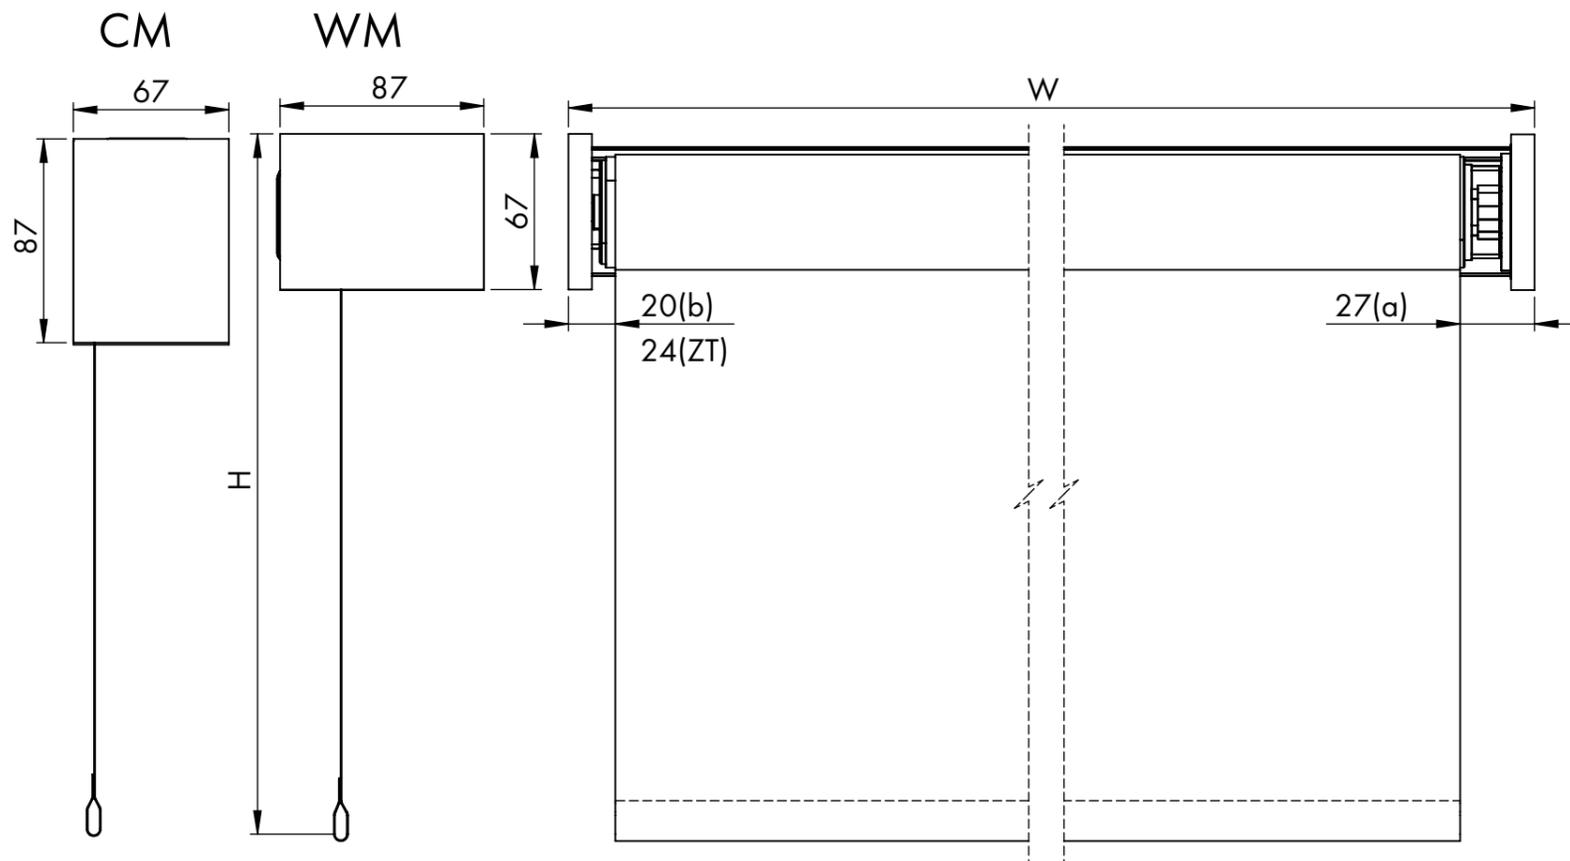


REN47

ACCU MOTOR SOMFY RTS

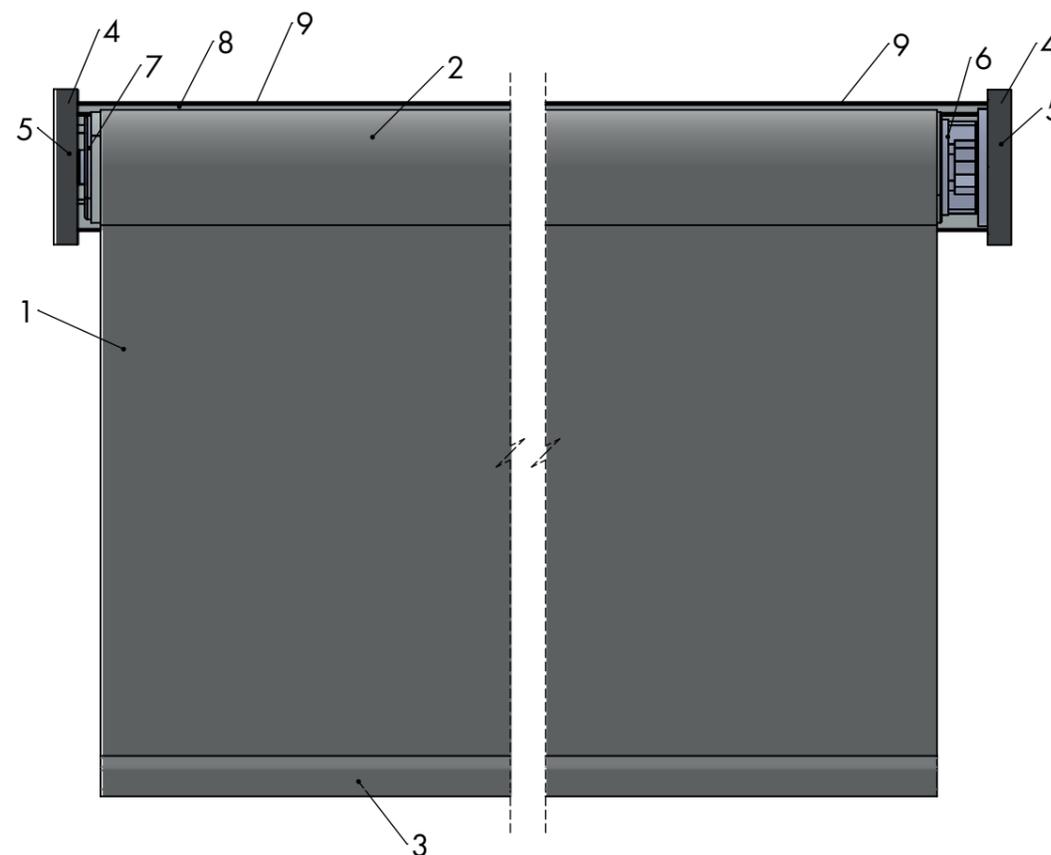

N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MP..	mounting profile
9	MC..	mounting clip

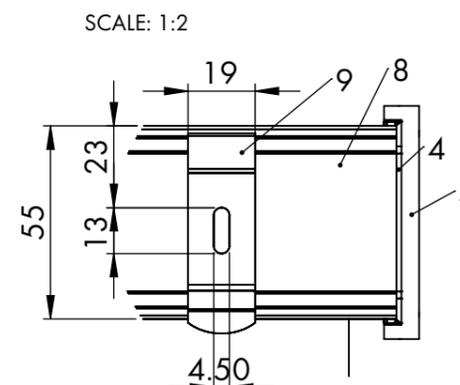
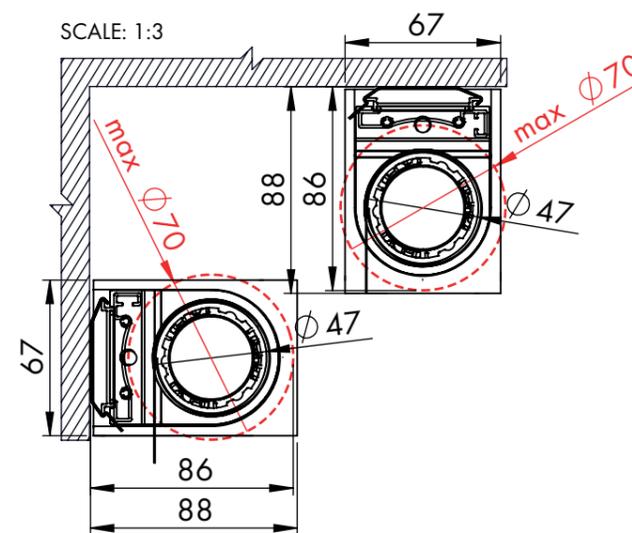


PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..






FINB

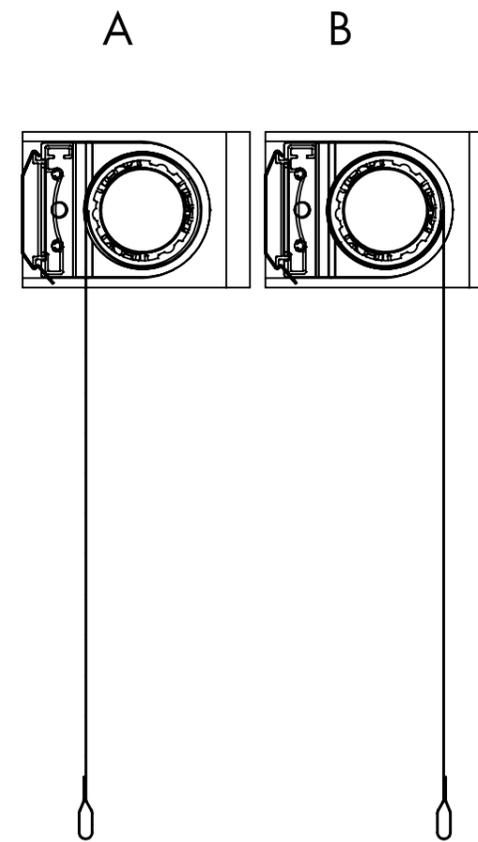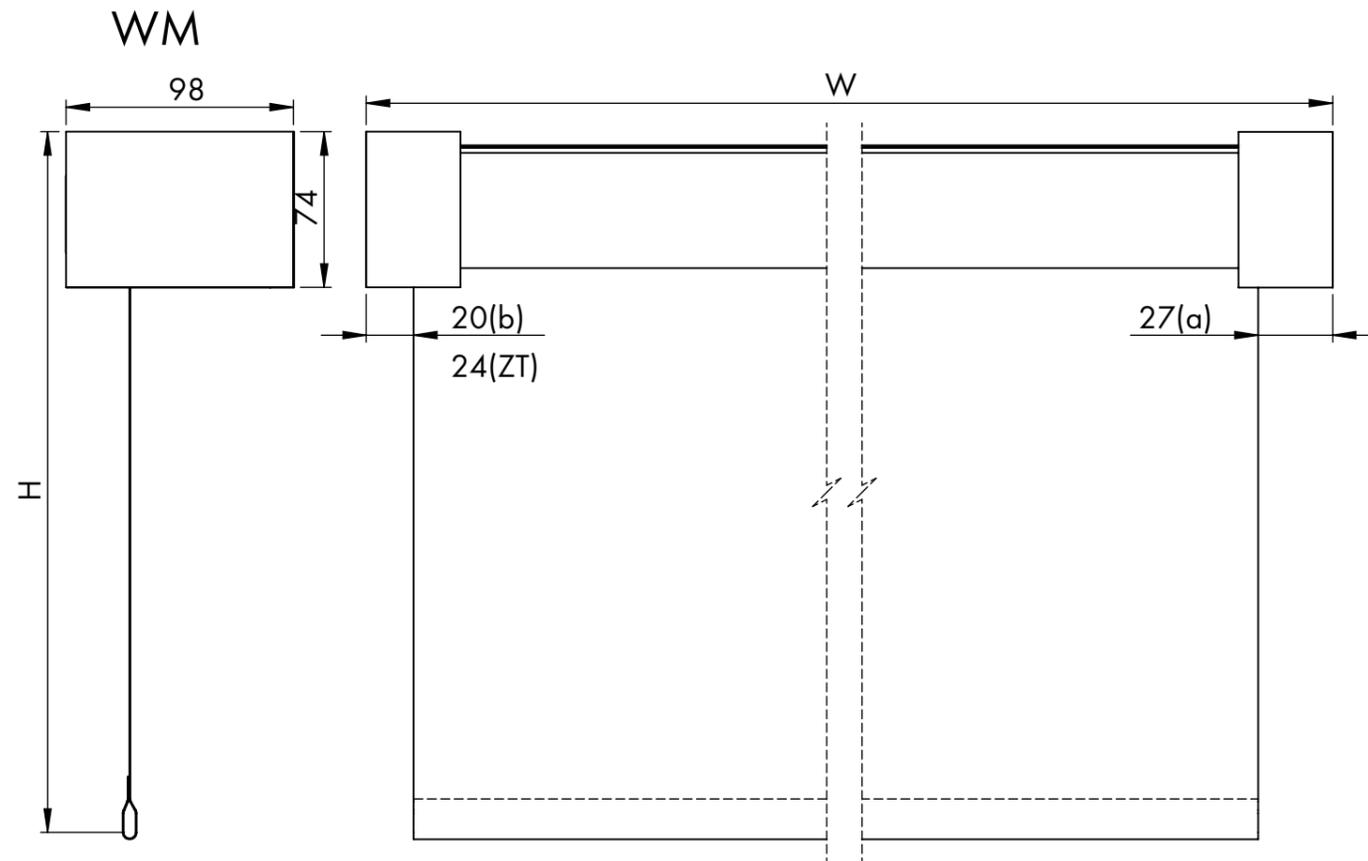

REN47

ACCU MOTOR SOMFY RTS

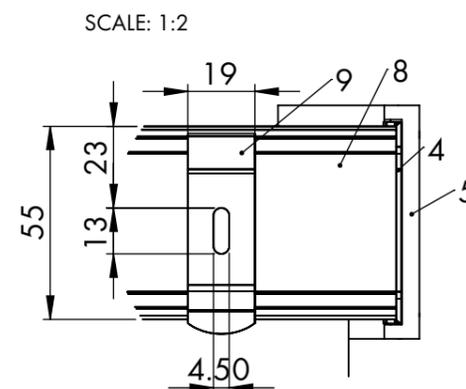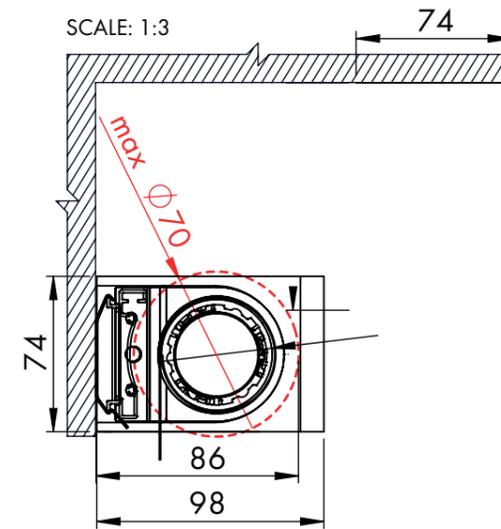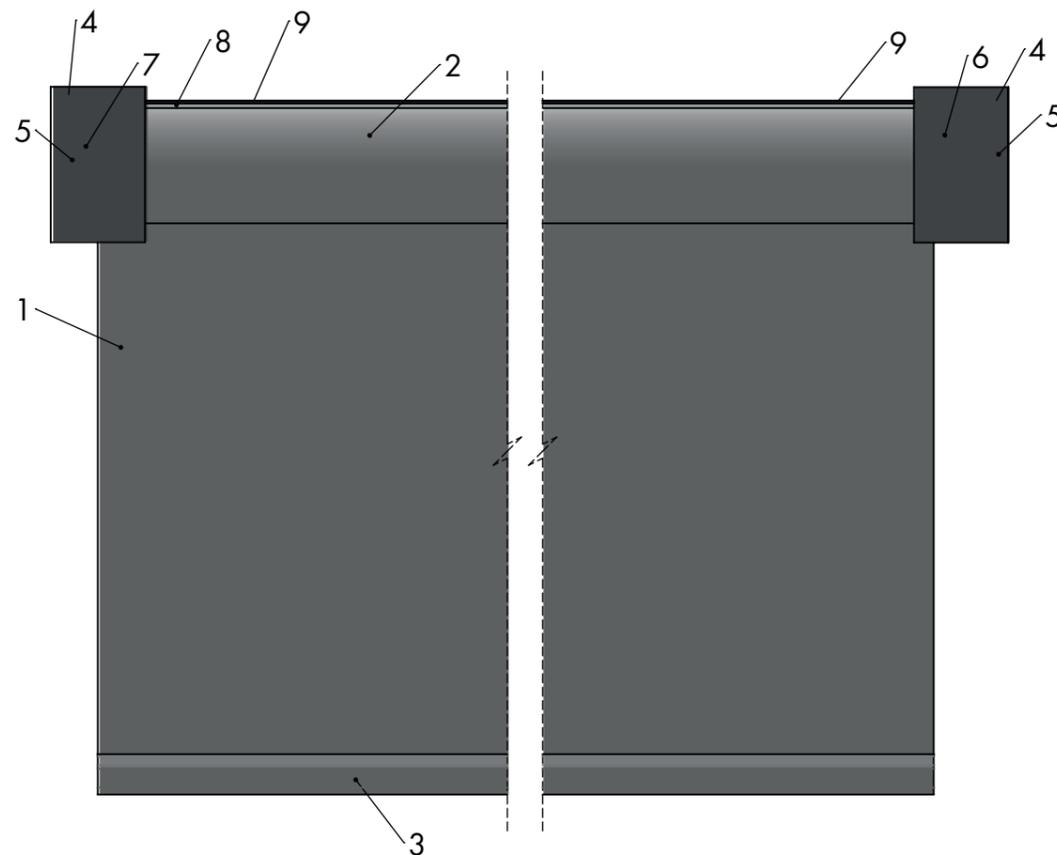

N	CODE	DESCRIPTION
1	F..	fabric
2	AX47	tube
3	FIN..	bottom bar
4	B..	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup
8	MP..	mounting profile
9	MC..	mounting clip


PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall)
- Control Side L (left) or R (right)
- Bottom bar FIN..




FINB


PURE 32

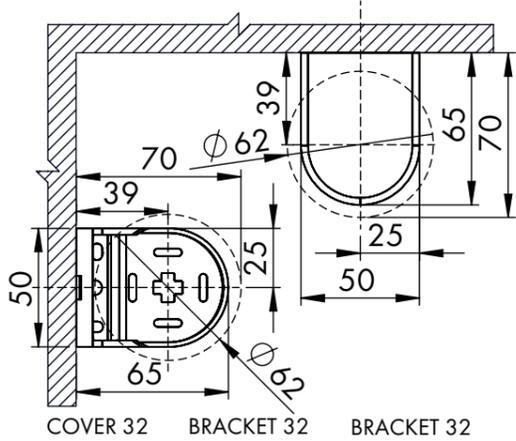


COVER 32 BRACKET 32 BRACKET 32

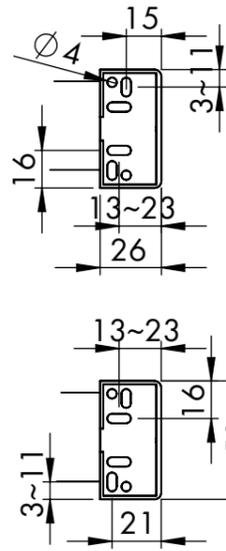


PURE 40

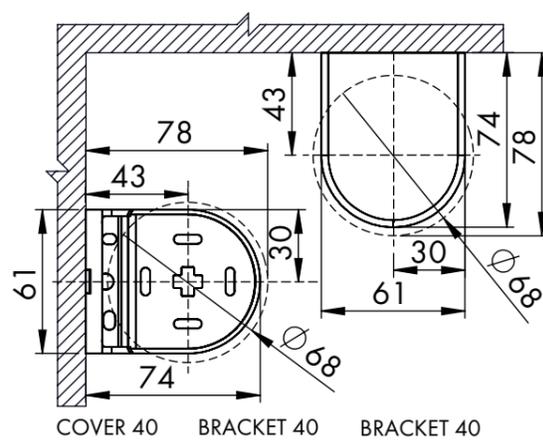


COVER 40 BRACKET 40 BRACKET 40

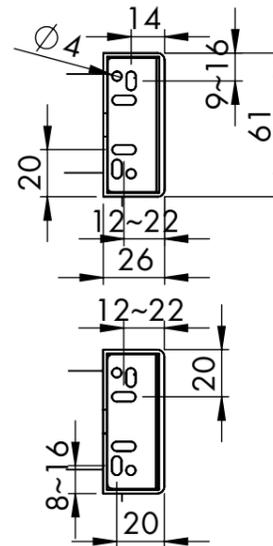


PURE 47 / PURE 54

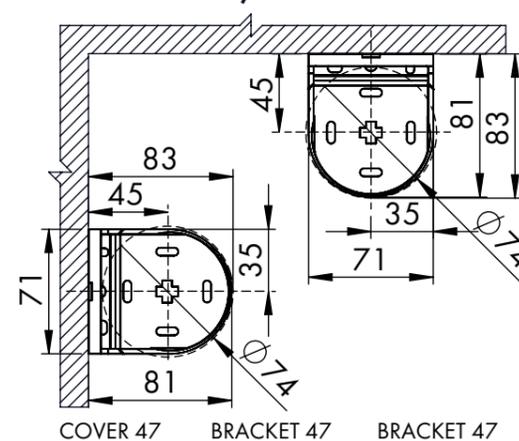


COVER 47 BRACKET 47 BRACKET 47

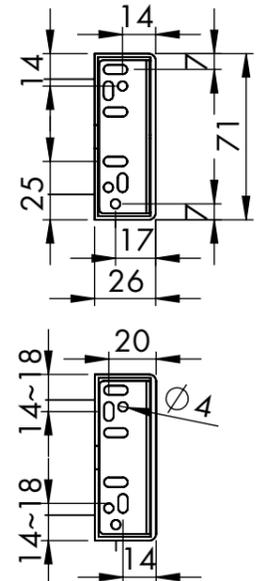


PURE 40 MP / PURE 47 MP

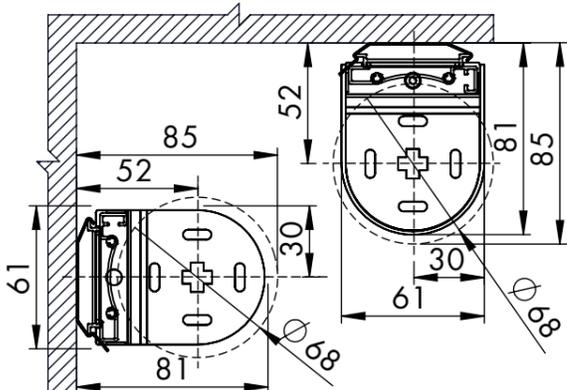


COVER 40 BRACKET 40 BRACKET 40 CLIP




PURE 68 R

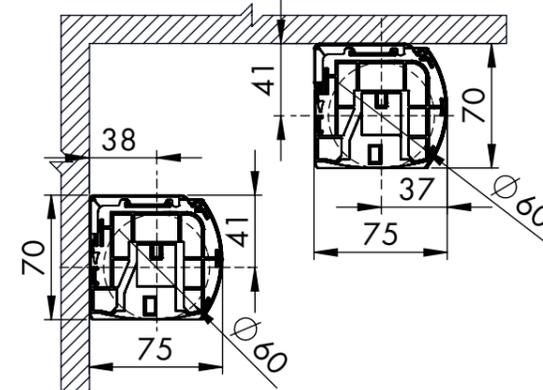


MOUNTING CLIP

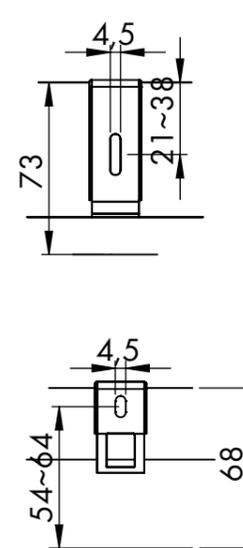


PURE 47 - extension bracket BL1 13

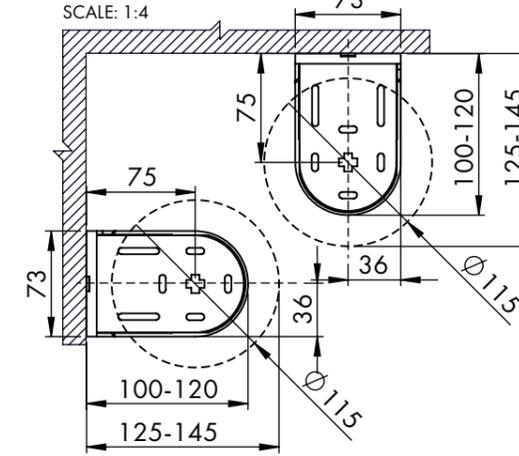


SCALE: 1:4

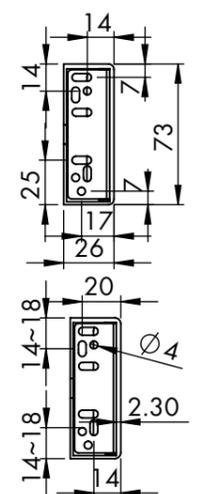


PURE 86 R

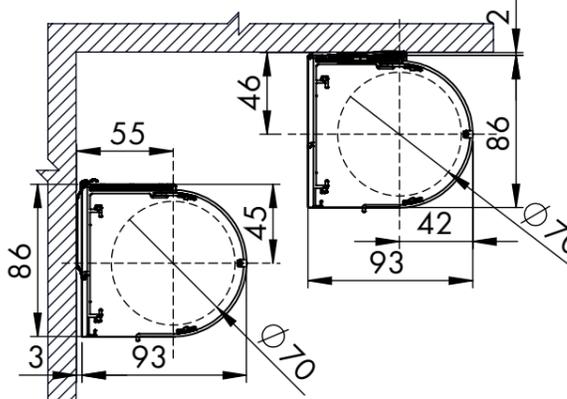


MP CLIP CLIP

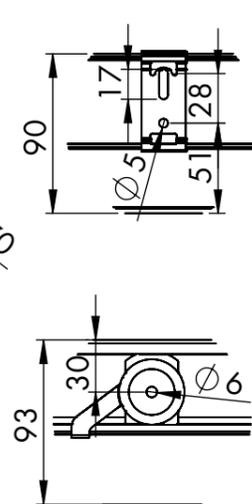




PURE 86 S

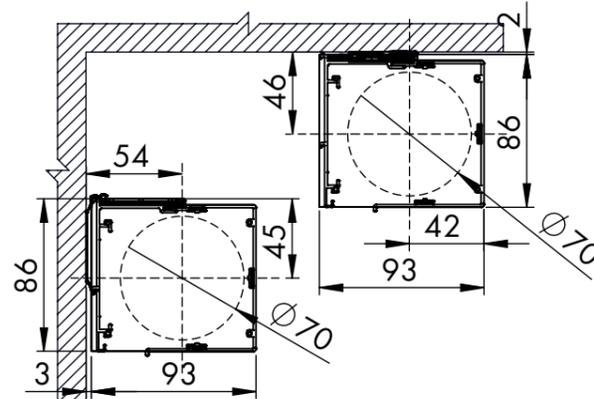

MP CLIP CLIP

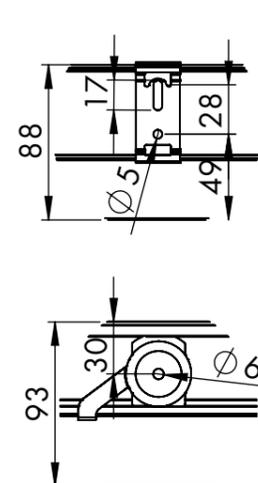

BIG

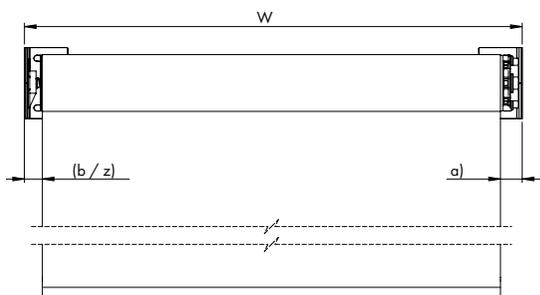


		in mm	CHAIN / CRANK	230V MOTOR
↔	MINIMUM WIDTH		800	800
	MAXIMUM WIDTH		3600	3600
	MAXIMUM WIDTH (WITH ZOOMTECH®)		chain not possible crank ∞ 7000	∞ 7000
BRACKET SIZE			80 x 100 / 100 x 130	80 x 100 / 130 x 100
DIAMETER OF THE TUBE without fabric			78	78
MAXIMAL DIAMETER OF THE TUBE with fabric → determines the maximum height			100 / 140 *	100 / 140 *
CONTROL gap in mm			CHAIN METAL	SOMFY M
control side (a) — non-control side (b)				SOMFY E
z = with ZOOMTECH®			CRANK	SOMFY IO
				SOMFY RTS
				SOMFY ZB

Maximum tolerance for mounting is -5mm / +5mm.



PARTLIST

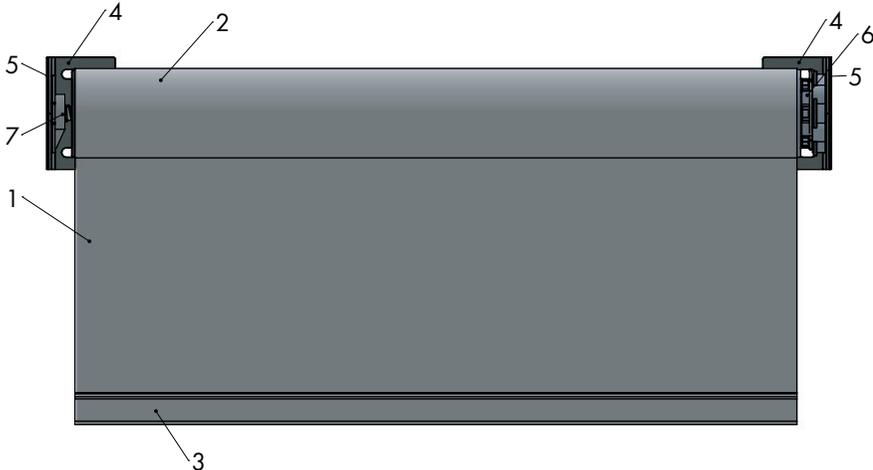

1	fabric
2	tube
3	bottom bar
4	bracket
5	bracket cover
6	chain mechanism
7	endcap
8	chain

! **LIMIT SETTINGS**
 As a rule, it is possible to reduce the end position of the roller blind by 10 mm.

VARIANTS

STANDARD COLOUR

01	04	10
white	grey	black

P-103S



BOX
103

Square aluminium headbox with service opening from the front.

FINB..



Ø 16 01 04 10

FINO..



Ø 26 01 EX 10

FINP..



Ø 26 01 EX 10

P-CS4..





Ø 35 10

BOTTOM BAR



SIDE GUIDING 4MM

i In the event that the width of the blind is ordered without ZOOMTECH® technology and this technology is already recommended or mandatory here, possible deformation of the fabric, especially the so-called "V" effect, will not be the subject of a complaint.


SCALE: 1:3

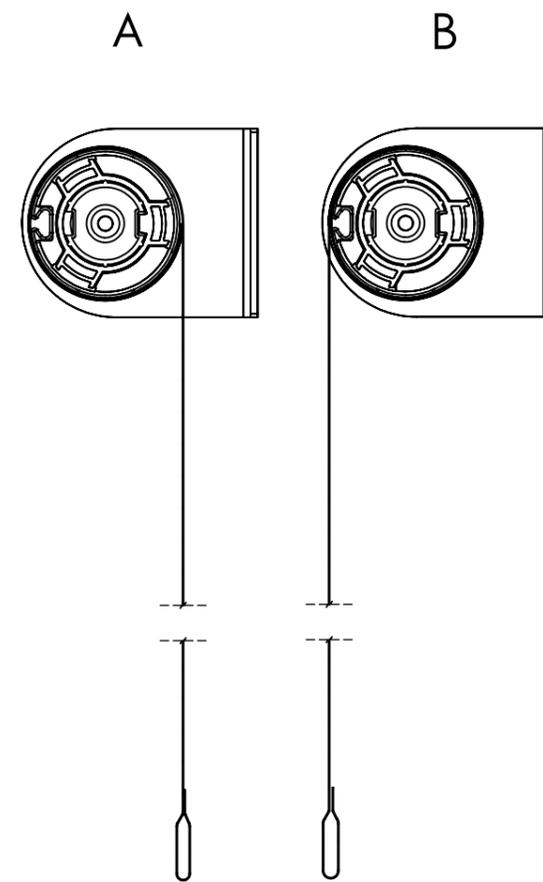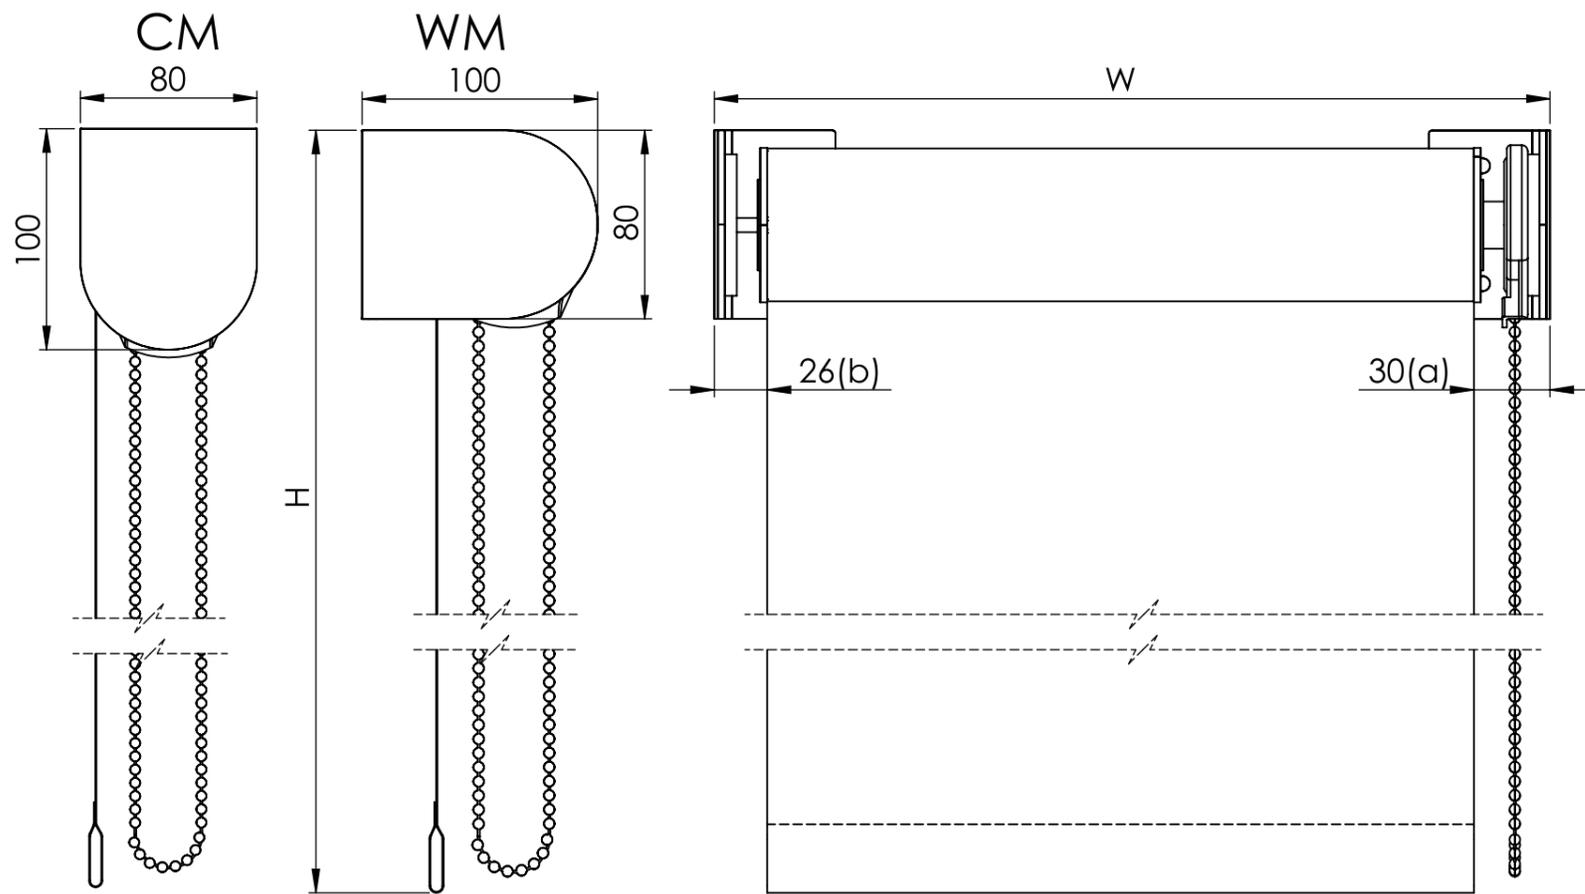

BIG 78 (M) CHAIN

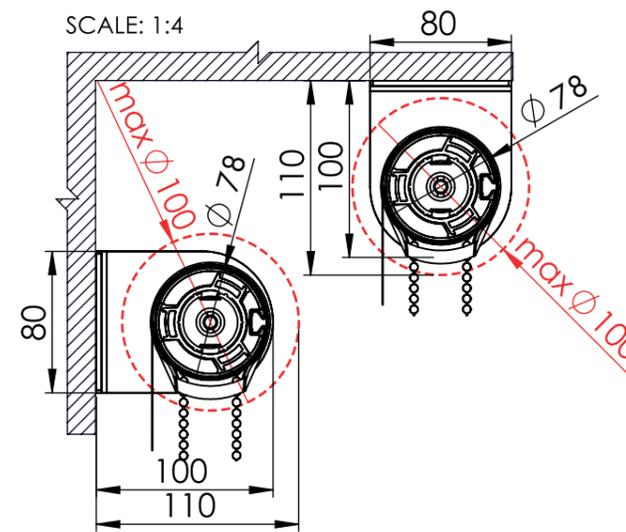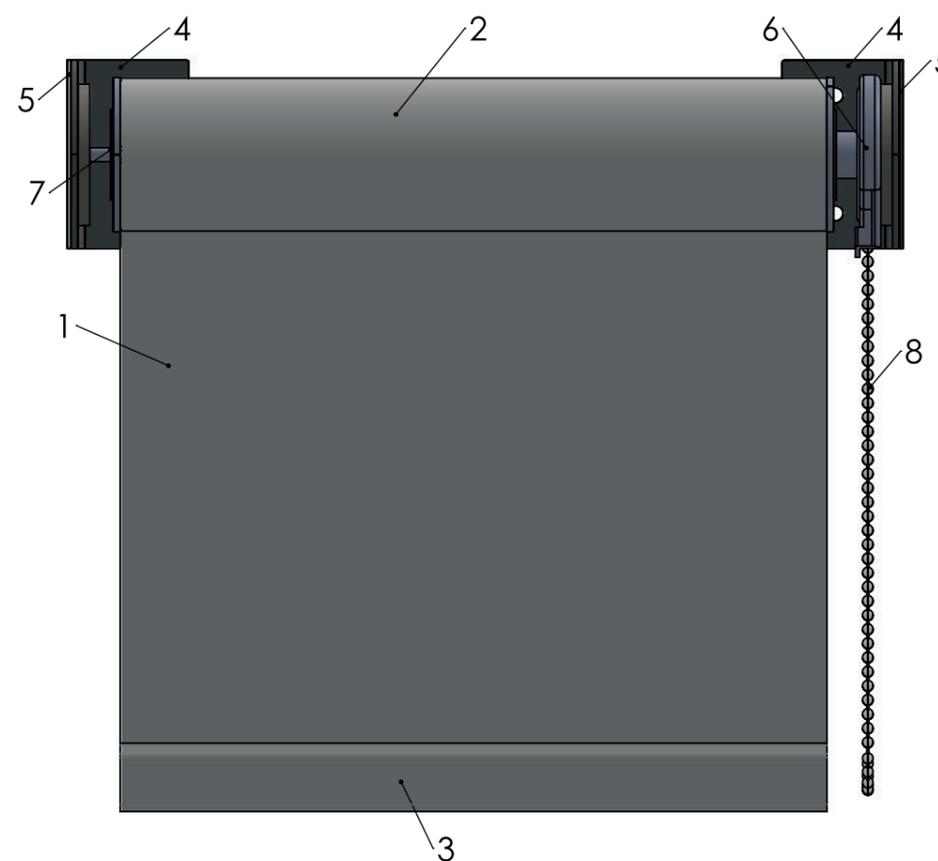

SCALE: 1:2

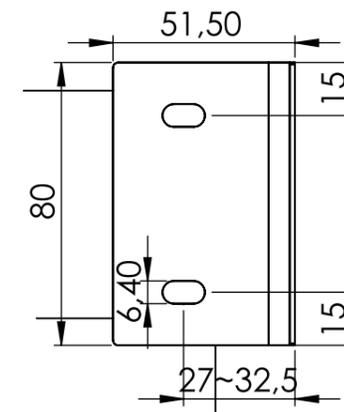

PARAMETERS



Width	W (in mm)
Height	H (in mm)
Fabric	F..
Unwinding	A or B (contra)
Mounting	WM (wall) or CM (ceiling)
Control Side	L (left) or R (right)
Bottom bar	FIN..
Chain	CH..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX63	tube
3	FIN..	bottom bar
4	B	bracket
5	BC..	bracket cover
6	CHM..	chain mechanism
7	EC..	end cup
8	CH..	chain





FINB


SCALE: 1:4

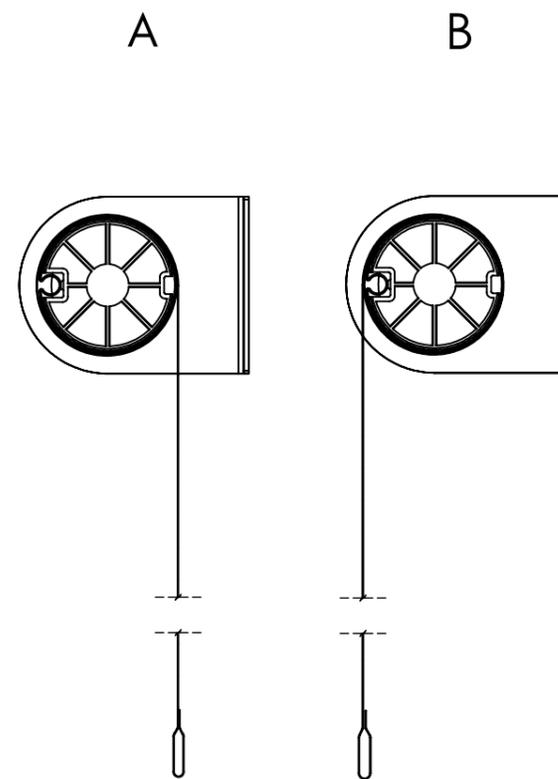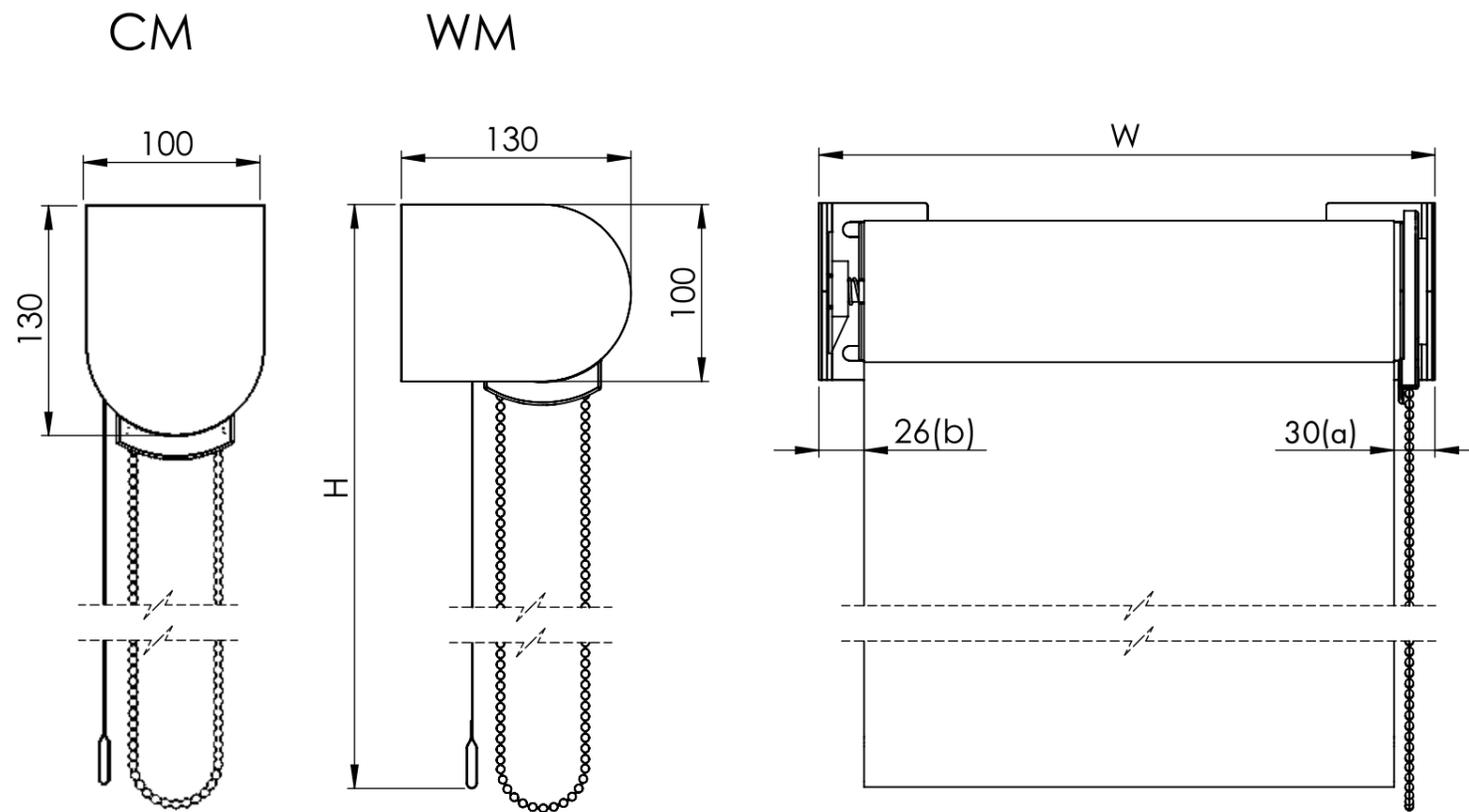

BIG 78 (L) CHAIN

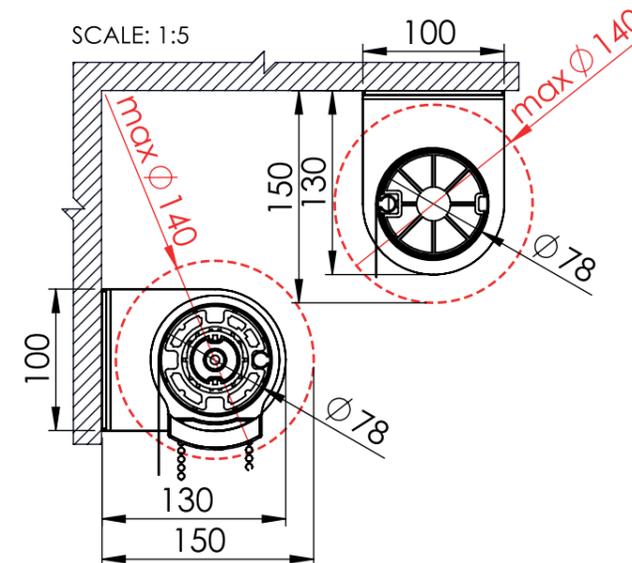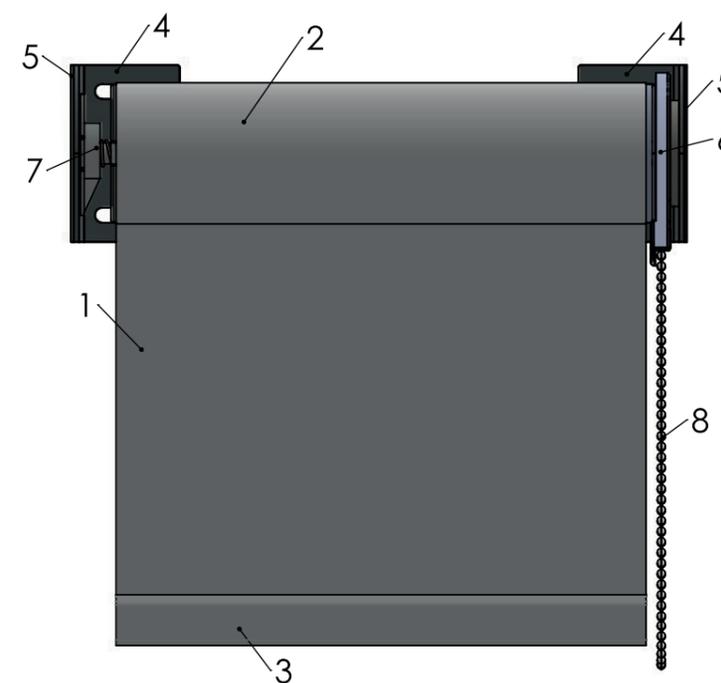

SCALE: 1:3

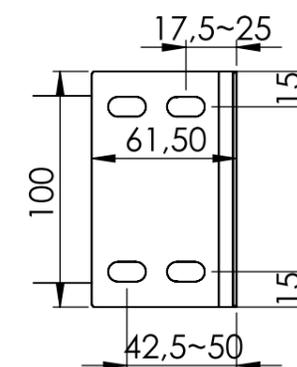

PARAMETERS




- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..
- Chain CH..

N	CODE	DESCRIPTION
1	F..	fabric
2	AX78	tube
3	FIN..	bottom bar
4	B	bracket
5	BC..	bracket cover
6	CHM..	chain mechanism
7	EC..	end cup
8	CH..	chain





FINB

SCALE: 1:5

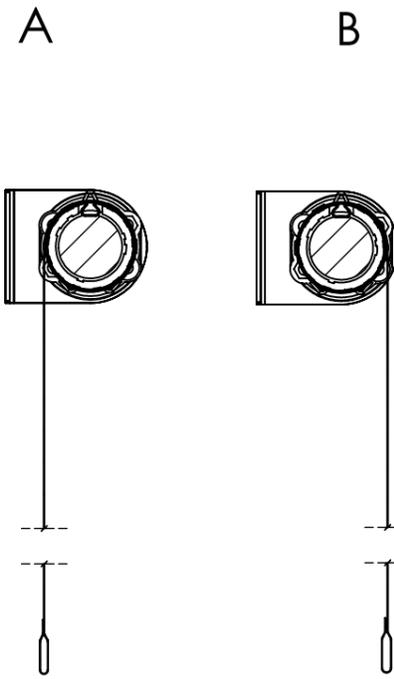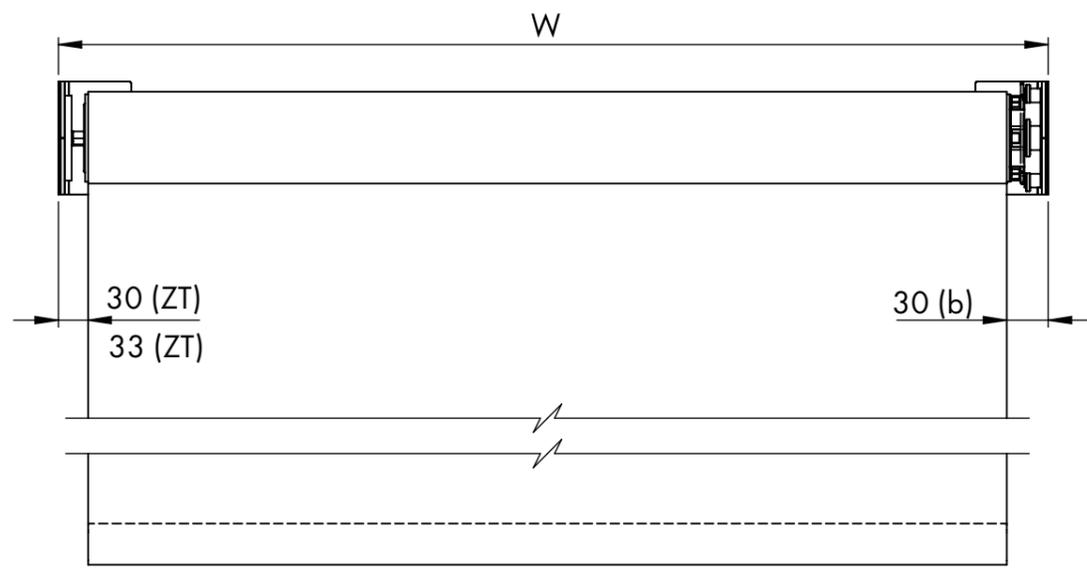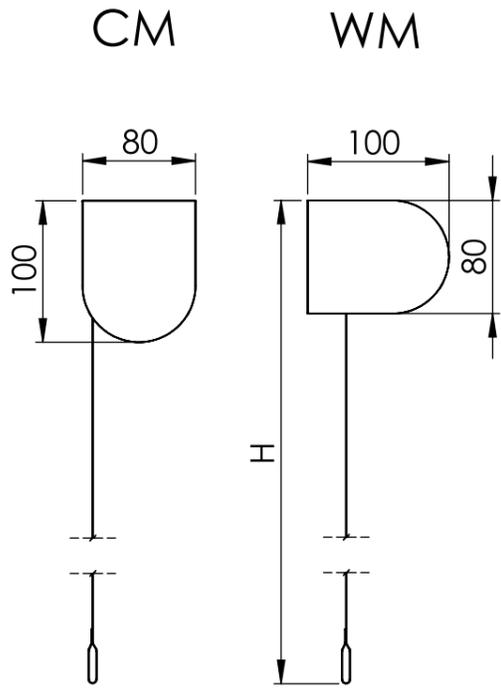

BIG 78 (M)

230V MOTOR SOMFY

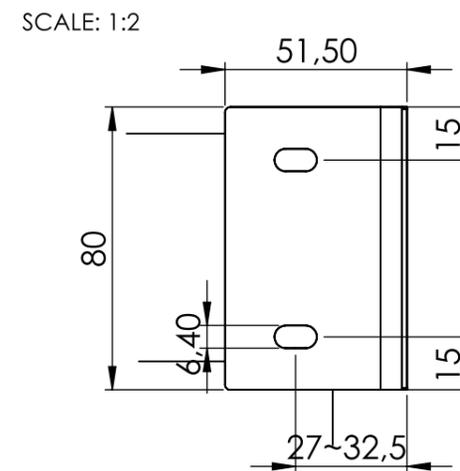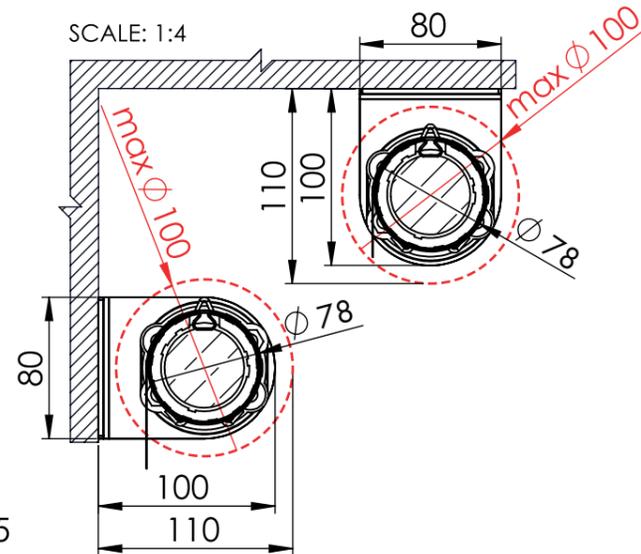

N	CODE	DESCRIPTION
1	F..	fabric
2	AX63	tube
3	FIN..	bottom bar
4	B	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup




PARAMETERS

- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..






FINB

SCALE: 1:5

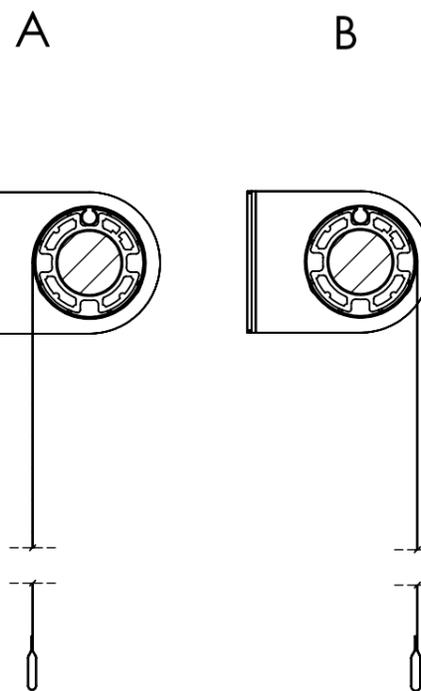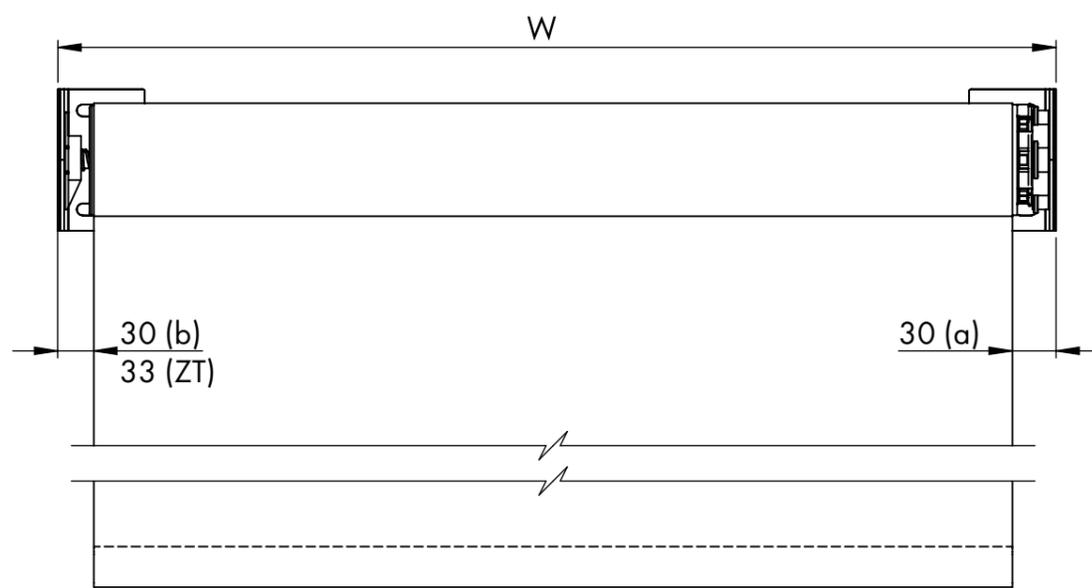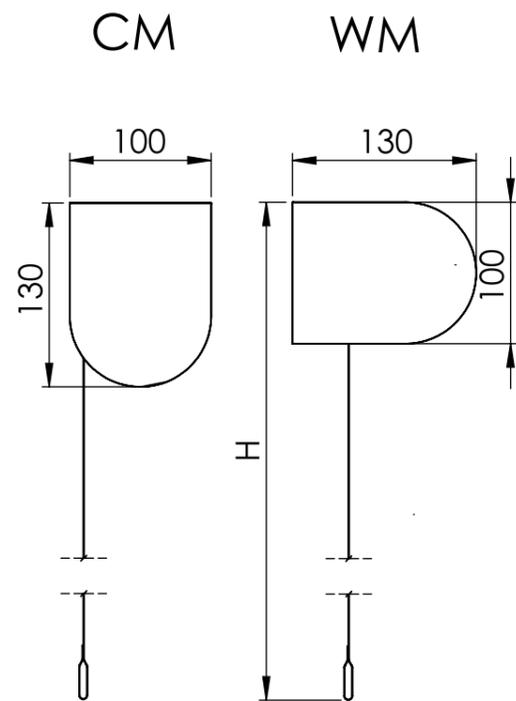

BIG 78 (L)

230V MOTOR SOMFY

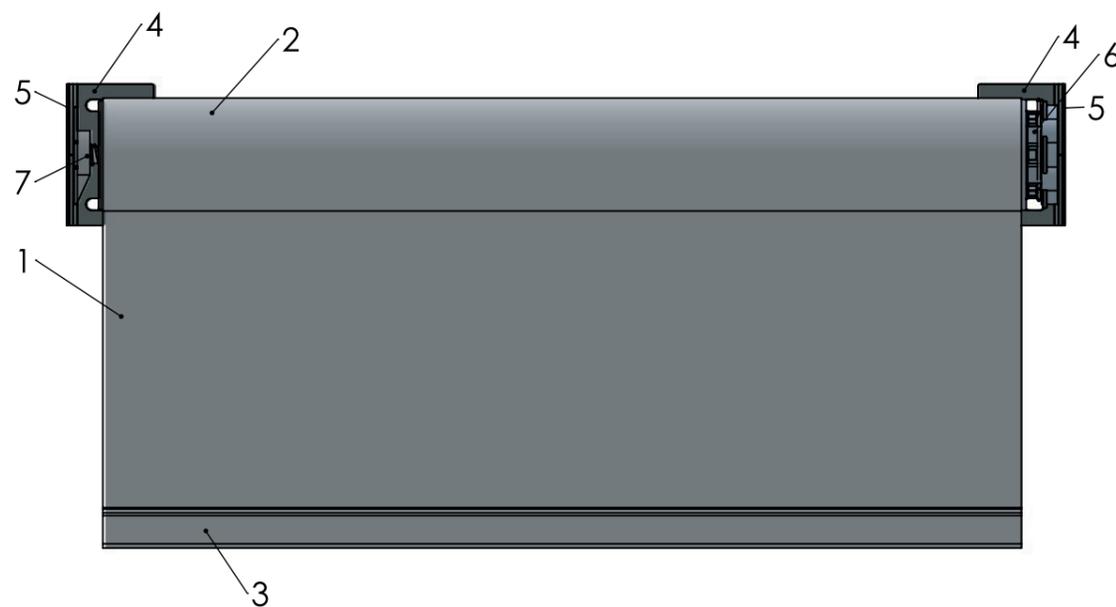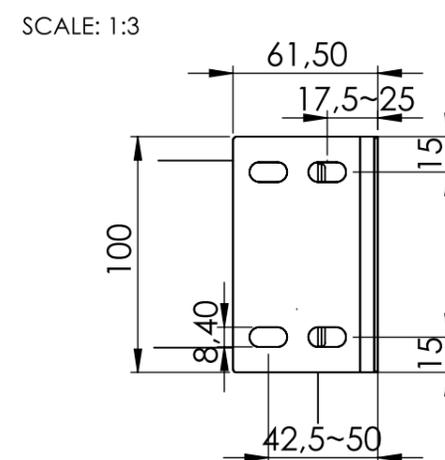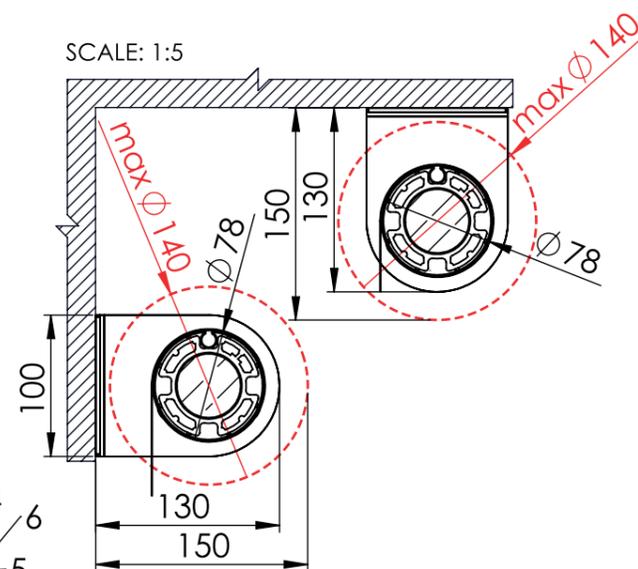

N	CODE	DESCRIPTION
1	F..	fabric
2	AX78	tube
3	FIN..	bottom bar
4	B	bracket
5	BC..	bracket cover
6	MOT..	motor + adapter
7	EC..	end cup

PARAMETERS



- Width W (in mm)
- Height H (in mm)
- Fabric F..
- Unwinding A or B (contra)
- Mounting WM (wall) or CM (ceiling)
- Control Side L (left) or R (right)
- Bottom bar FIN..



FINB

BLACKOUT BLIND

85S

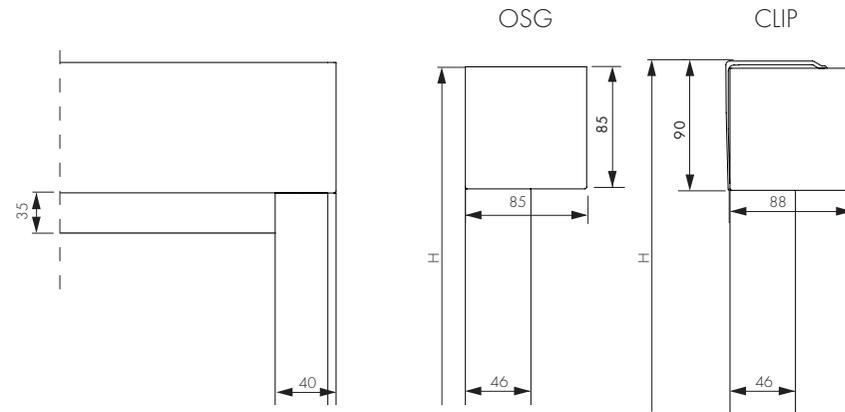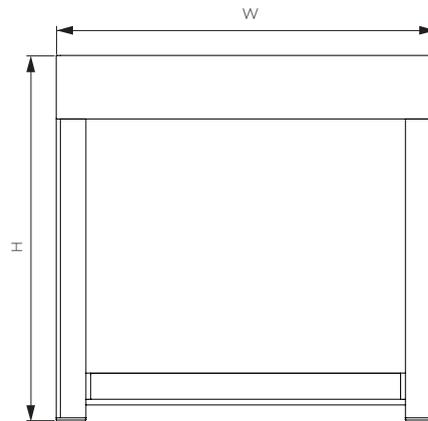

in mm	
↔	MINIMUM WIDTH
	MAXIMUM WIDTH
	MAXIMUM WIDTH (WITH ZOOMTECH®)
↕	MAXIMUM HEIGHT
BOX	
DIAMETER OF THE TUBE	without fabric
CONTROL gap in mm	
control side (a) — non-control side (b)	(z = with ZOOMTECH®)

⌚ 230V MOTOR

800

2200

∞ 4000

fabric thickness < 0,5mm - 2000mm height
 fabric thickness < 0,6mm - 1800mm height
 fabric thickness > 0,61mm - 1600mm height

85 x 85

47

- SOMFY IO
- SOMFY RTS
- SOMFY ZB


pre-drilling of the sideguides and/or box is optional and must be specified while ordering



BLACKOUT BLIND

BOX WITH THE POSSIBILITY OF BOTTOM INSPECTION

PARTLIST

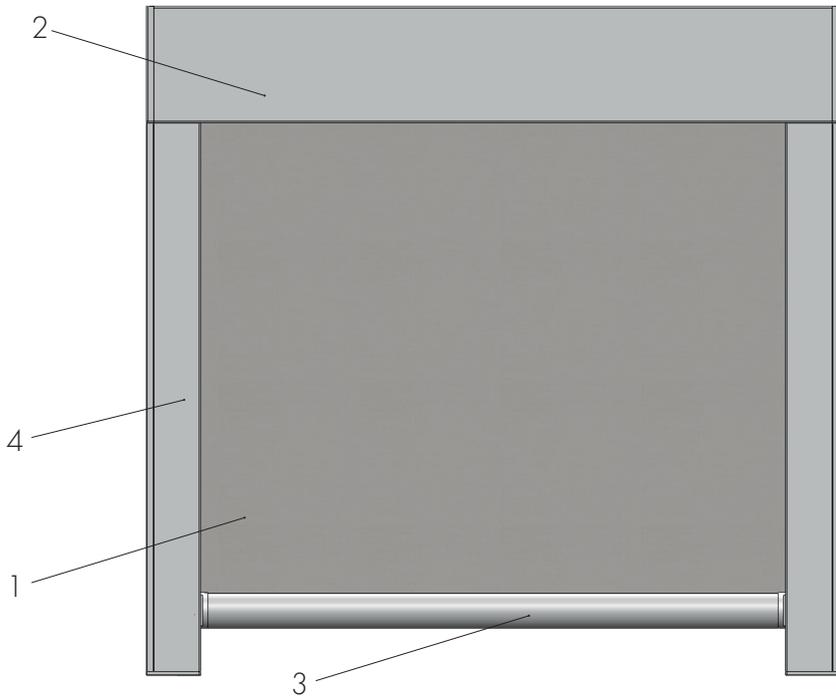

1	fabric
2	box
3	bottom bar
4	side guides

FINS is default with a black rubber sealing at the bottom (8mm). Alternatively, the sealing can be placed to the back (specify when ordering)







*FINS is standardly equipped with black rubber sealing on the bottom side (8 mm). Alternatively, the sealing can be placed on the back side (please specify when ordering).
Painting in RAL / NCS colors is available upon request.*

STANDARD COLOUR


WH	O4	BL
white	grey	black

CABLE OUTLETS

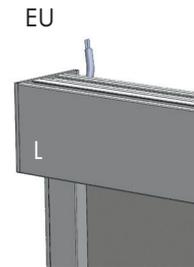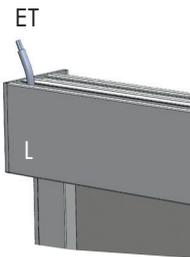

back side of the box


COVER PROFILE P-PPLUS

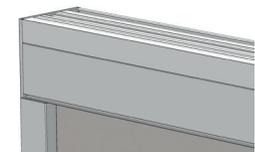


BOTTOM BARS



WH O4 BL
35 x 35

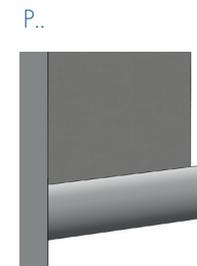

WH O4 BL
Ø 26

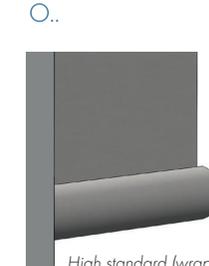

High standard (wrapped)

Ø 26




It covers the bevel on the rear side of the box. Cannot be used together with CLIP installation.



MOUNTING OF THE BOX


OSG
 BOX SUPPORTED BY THE SIDE GUIDES
 selfsupporting till to 4000 mm width




CMH
 FIXED FROM INSIDE
 from width 4000 mm
 or limited space
 (e.g. niche 90 x 90 mm)



CLIP
 WITH CLIPS
 WALL MOUNTING



WITH CLIPS
 CEILING MOUNTING



MOUNTING OF THE SIDE GUIDES




MBF



MIF

ASSEMBLY OF THE SIDE GUIDES



P-IC



P-WIND



The closing part of the profile is secured with Allen screws

HIGHER RESISTANT DESIGN


pcs S

Durable side guiding


P-WIND

Only for KSXB and XSBB85 systems.


BLIND-BLOCK 85S

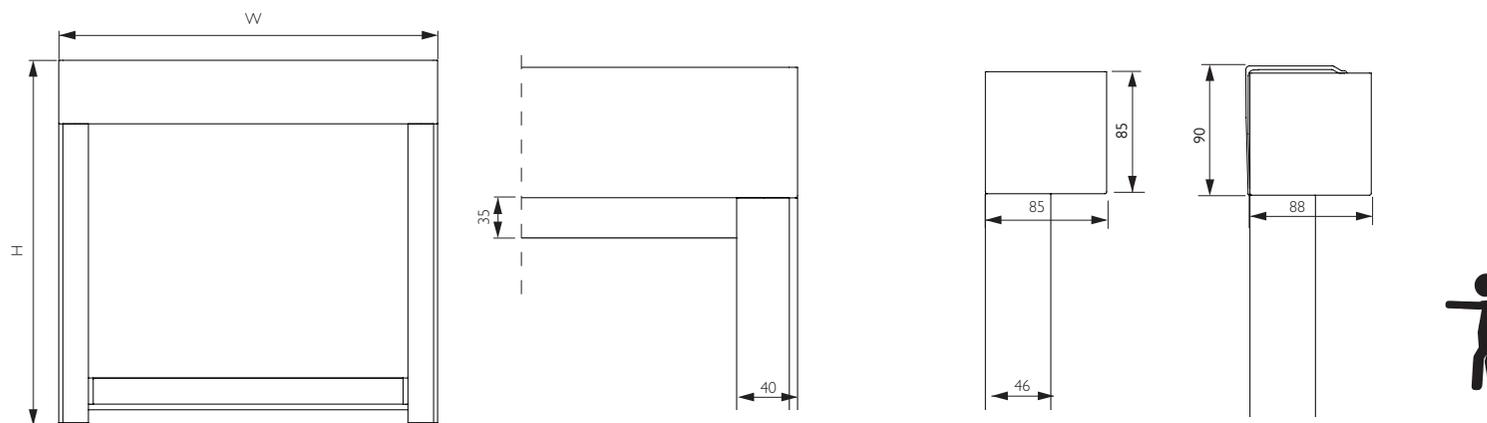


	ACCU BID	
	230 V E, RTS, IO, EDGE	
	230 V E, BID, WiFi	

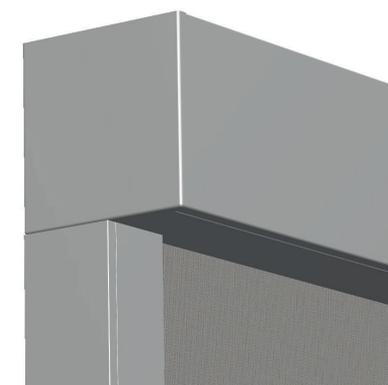


OSG




CMH




CLIP WM





CLIP CM



MBF



MIF

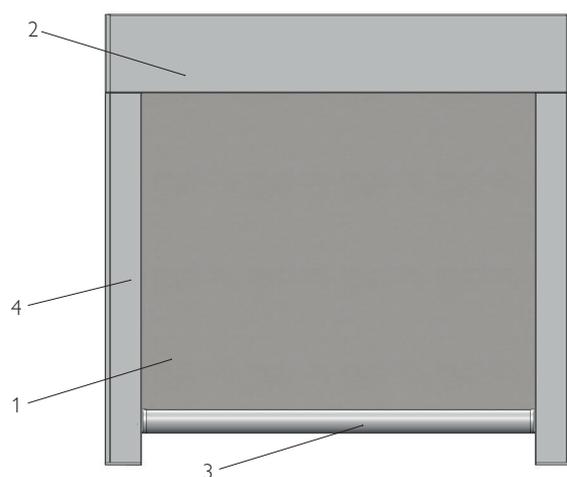

1	fabric
2	box
3	bottom bar
4	side guides

PARAMETERS

Width	W (in mm)
Height	H (in mm)
Fabric	F..
Unwinding	only A
Mounting	OSG, CMH, CLIP
Control side	L (left) or R (right)
Bottom bar	FINS., FINP..., FINO..



FINS

