






LEGENDA

Design side support	
Accu	
Accu RTS	
BOX	
Alternating Current (AC)	
Chain	
Ceiling mounting not possible	
Mounting profile	
Side guide possible	
Side guide not possible	
No design side support possible	
Motor 230 V avaible in:	
Motor 230 V avaible in:	

REN32

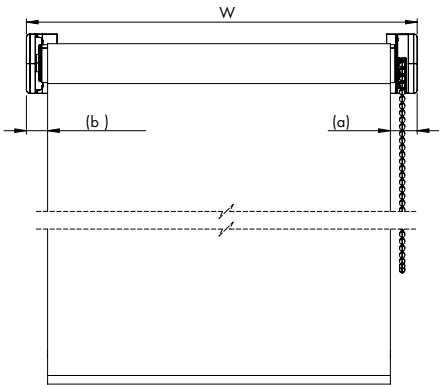

in mm		
	MINIMUM WIDTH	600
	MAXIMUM WIDTH	1800
	MAXIMUM WIDTH WITH ZOOMTECH ®	not possible
BRACKET SIZE		65 x 50
DIAMETER OF THE TUBE without fabric		32
MAXIMAL DIAMETER OF THE TUBE with fabric → determines the maximum height		62 *

CONTROL
control side (a) — non-control side (b)


CHAIN 



Maximum tolerance for mounting is -5mm /+ 5mm.

CHAIN


PARTLIST

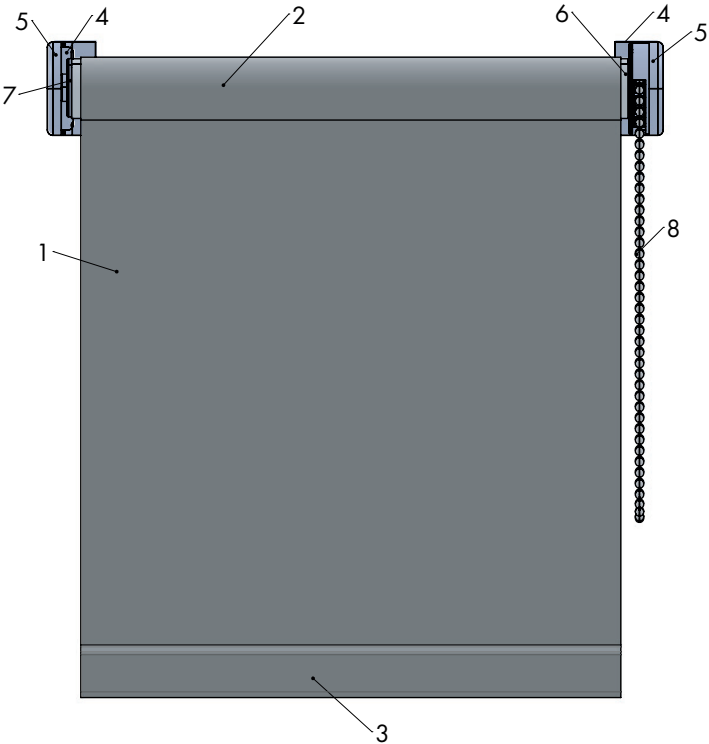

1	fabric
2	tube
3	bottom bar
4	bracket
5	bracket cover
6	chain mechanism
7	endcap
8	chain

! LIMIT SETTINGS
As a rule, it is possible to reduce the end position of the roller blind by 10 mm.

VARIANTS

STANDARD COLOUR

01	05	10
white	grey	black

FINB..

hidden

Ø 16 01 04 10

FINQ..

wrapped

Ø 18 01 EX 10

FINR..

visible

Ø 18 01 EX 10

CSE..




Ø 16 01 04 10

BOTTOM
BAR

SIDE GUIDING
1MM

i In the event that the width of the blind is ordered without ZOOMTECH® technology and this technology is already recommended or mandatory here, possible deformation of the fabric, especially the so-called "V" effect, will not be the subject of a complaint.

REN40

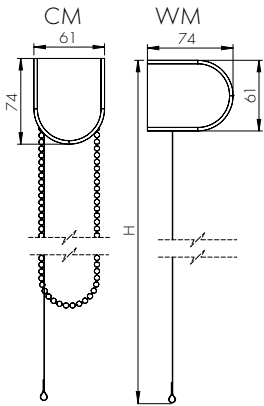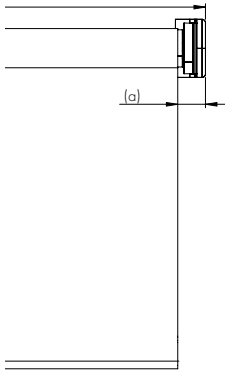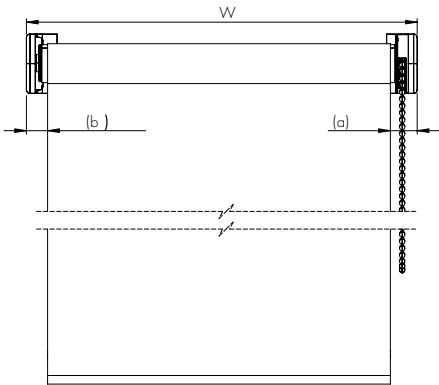

in mm							
	MINIMUM WIDTH	CHAIN	600	ACCU MOTOR	600	230V MOTOR	600
	MAXIMUM WIDTH		2200		2200		2200
	MAXIMUM WIDTH (WITH ZOOMTECH ®)		not possible		∞ 4000		∞ 4000
BRACKET SIZE			74 x 61		74 x 61		74 x 61
DIAMETER OF THE TUBE without fabric			40		43		43
MAXIMAL DIAMETER OF THE TUBE with fabric → determines the maximum height			68 *		68 *		68 *
CONTROL gap in mm control side (a) — non-control side (b) z = with ZOOMTECH ®		CHAIN METAL		SOMFY ACCU RTS		SOMFY M SOMFY E SOMFY io SOMFY RTS	

Maximum tolerance for mounting is -5mm /+ 5mm.
For ZOOMTECH® -0/+5mm.



