



BM Fabrics
Hoogstraat 177
9550 HERZELE

Your notice of
 28-04-2025

Your reference

Date
 09-05-2025

Analysis Report 25.02383.01

Required tests :


EN 13773 (2003)

Sample id	Information given by the client	Date of receipt
T2509080	829027 SARTENIJA	28-04-2025




Gina Créelle
 Order responsible

This report may be reproduced, as long as it is presented in its entire form, without written permission of Centexbel.
 The results of the analysis cover the received samples. Centexbel is not responsible for the representativeness of the samples.
 In assessing compliance with the specifications, we did not take into account the uncertainty on the test results.



Samples

T2509080
829027 SARTENIJA

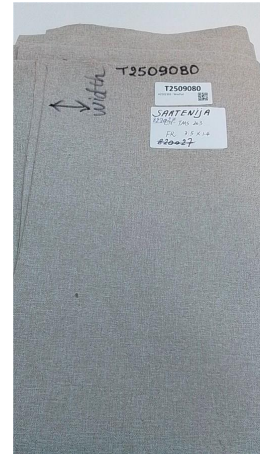



Reference: T2509080 - 829027 SARTENIJA

Washing and drying

Date of ending the test	30-04-2025
Standard used	ISO 6330 (2000) + A1 (2008), ISO 6330 (2012)
Deviation from the standard	-
Conditioning	20°C, relative humidity 65%
Apparatus	Wascator FOM 71 (type A)
Used detergent	ECE detergent (Type 3)
Washing method and temperature	8A- 30°C (2000)
Drying method	A = Line dry (2000)
Number of washing cycles	1
Mass of the test specimens	765g
Mass of the ballast	The washing machine is filled with ballast to achieve 2 kg in total
Remark	Washing always occurs with a ballast type III 100% PES regardless of the composition of the fabric.

Sample generated: T2509080_01d



Reference: T2509080_01d - 829027 SARTENIJA

Textiles – Burning behaviour – Curtains and drapes - Textile fabrics - Determination of the ignitability of vertically oriented specimens.

Date of ending the test 09-05-2025
Standard used EN 1101 (1995) + A1 (2005)
Product standard EN 13773 (2003)

Deviation from the standard -

Conditioning 20°C, relative humidity 65%
Testing atmosphere 22°C, relative humidity 31%

Dimension of the specimens 200 mm x 80 mm

Ignition Bottom edge

The test specimens have been cleaned.

Length

Flame application time (s)	Cases of ignition	Cases of non-ignition
1	0	1
2	0	1
3	0	1
4	0	1
5	0	1
10	0	1
15	0	1
20	0	5

The mean of the recorded times at which ignition was observed is calculated
No ignition within 20 s



Width

Flame application time (s)	Cases of ignition	Cases of non-ignition
1	0	1
2	0	1
3	0	1
4	0	1
5	0	1
10	0	1
15	0	1
20	0	5

The mean of the recorded times at which ignition was observed is calculated
 No ignition within 20 s

Minimum ignition time

No ignition within 20 s

Reference: T2509080 - 829027 SARTENIJA

Textiles and textile products – Burning behaviour – Curtains and drapes. Measurement of flame spread of vertically oriented specimens with large ignition source.

Date of ending the test 09-05-2025
Standard used EN 13772 (2011)
Product standard EN 13773 (2003)

Deviation from the standard -

Conditioning 20°C, relative humidity 65%

The test specimens have not been cleaned nor submitted to an accelerated ageing procedure.

Length

	Face A	Face B	Face B	Face B
Severance 1 st thread	no	no	no	no
Severance 2 nd thread	no	no	no	no
Severance 3 rd thread	no	no	no	no
Time to sever 3 rd thread (s)	/	/	/	/
Destroyed length (mm)	140	145	140	140
Flaming debris	no	no	no	no

Width

	Face A	Face B	Face A	Face A
Severance 1 st thread	no	no	no	no
Severance 2 nd thread	no	no	no	no
Severance 3 rd thread	no	no	no	no
Time to sever 3 rd thread (s)	/	/	/	/
Destroyed length (mm)	145	135	145	145
Flaming debris	no	no	no	no



Reference: T2509080 - 829027 SARTENIJA

Washing and drying

Date of ending the test	30-04-2025
Standard used	ISO 6330 (2000) + A1 (2008), ISO 6330 (2012)
Deviation from the standard	-
Conditioning	20°C, relative humidity 65%
Apparatus	Wascator FOM 71 (type A)
Used detergent	ECE detergent (Type 3)
Washing method and temperature	8A- 30°C (2000)
Drying method	A = Line dry (2000)
Number of washing cycles	12
Mass of the test specimens	707g
Mass of the ballast	The washing machine is filled with ballast to achieve 2 kg in total
Remark	Washing always occurs with a ballast type III 100% PES regardless of the composition of the fabric.

Sample generated: T2509080_02d



Reference: T2509080_02d - 829027 SARTENIJA

Textiles and textile products – Burning behaviour – Curtains and drapes. Measurement of flame spread of vertically oriented specimens with large ignition source.

Date of ending the test 09-05-2025
Standard used EN 13772 (2011)
Product standard EN 13773 (2003)

Deviation from the standard -

Conditioning 20°C, relative humidity 65%

The test specimens have been cleaned.

Length

	Face A	Face B	Face B	Face B
Severance 1 st thread	no	no	no	no
Severance 2 nd thread	no	no	no	no
Severance 3 rd thread	no	no	no	no
Time to sever 3 rd thread (s)	/	/	/	/
Destroyed length (mm)	135	145	145	145
Flaming debris	no	no	no	no

Width

	Face A	Face B	Face B	Face B
Severance 1 st thread	no	no	no	no
Severance 2 nd thread	no	no	no	no
Severance 3 rd thread	no	no	no	no
Time to sever 3 rd thread (s)	/	/	/	/
Destroyed length (mm)	145	150	145	140
Flaming debris	no	no	no	no



Reference: T2509080 - 829027 SARTENIJA

Classification of curtains and drapes according to EN 13773

Product standard EN 13773 (2003)

Classification in accordance with EN 13773 Class 1